




VALUE IN
WEIGHING

September 2022
LOAD CELL GUIDE



RECOMMENDED CROSS REFERENCE CHART

Brecknell	Revere	HBM	Tedea	Celtron	Sensortronics	Coti	Artech	Rice Lake	Totalcomp	BLH	Fairbanks	NMB	Thurman	Transcell	Flintec	Vishay
H3				STC	60001-0221 COMPACT	CISB										
H3F				STC	60001, 60036, RT1363	CISB								BSS		
H3G	363, M363			STC, STR	60001		20210	RL20000/20001	TS-SS					BSA/BSS		STC
L6D	640	PW6-2	1022	LPS 600g ~ 35kg		CI-22	61022	RL1521		C2G1	4900	C2C1				
L6E				LPS												
L6F			1320	HOC												
L6G	672			LOC										FAV		
L6Q	650		1241	LPS 60kg ~ 200kg												
L61			1006													
L6N	642	SP	1042	MT1041				RL1042/1040								
L6T	652		1252													
H8C	5123	B35	3420/3421	SQB	65023	CI-23	30310	RL35023/39123	TSB					SBS		SQB
H9C	5103			CSB	60058	CI-5103	70210	RL70000								
H9D	5230			DSR	65013	CI-16	70510	RL75016								DSR
H9N	5303		4158	CLB	65058	CI-58		RL75058								
B3G	9363 M9363			STC, STR	60050											
B8D	9123 M9123		3410, 3421	SQB	65023			RL35023S								
BM6A					60064											
BM8D		H35														
BM8H	ACB	HLC		HVC	65084											
B9C	9103					CI-5103-SSW		RL7100HE RL70000SS								
B9D	9203			DSR-HSS	65016W	CI-16-SSW		RL75016SS								DSR-HSS
HM9E	5223			HED	65040-1127W	CI-5223	80210	RL75223					TSC800			
BM11	SHB	Z6	355	HBB				RLHBB								HBB
BM14A	CSP				65088-1000	CP26S5	90310	RLCSP1	TCSP1							
BM14G	ASC															
HM-8-402								RL1800 M.S.								
BM-8-404								RL1800 S.S.								
BM-8-406								RTM								
HM-9-401								EZ Mount 1 M.S.								
BM-9-402								EZ Mount 1 S.S.								
HM-9-403								RL1600 M.S.								
BM-9-404								RL1600 S.S.								
BM-11-401								RL1700HE								

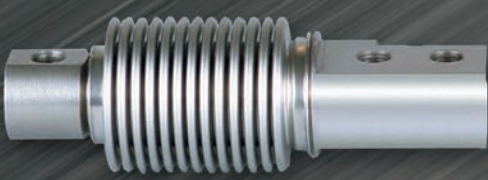

VALUE IN
WEIGHING


CONTACT INFORMATION

Brecknell USA

1000 Armstrong Drive
Fairmont, Minnesota 56031
Toll-Free: 800-637-0529
Telephone: 507-238-8702
Fax: 507-238-8271
Email: sales@brecknell scales.com
brecknell scales.com

Brecknell Canada

6429 Abrams Street
St. Laurent, Quebec
Canada H4S 1X9
Toll Free: 800-268-1662
Telephone: 416-213-9900
Fax: 416-213-9960
Email: sales@brecknell scales.ca
www.brecknell scales.ca

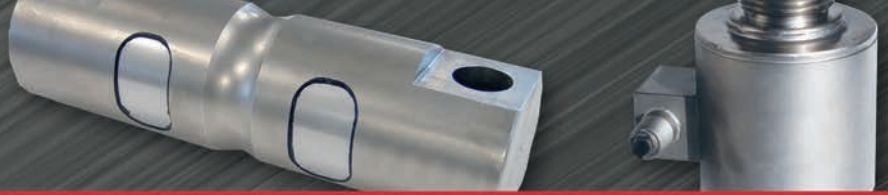

COMPANY HISTORY

The Brecknell brand has always been associated with global weighing manufacturers and has been viewed in many different guises over the last century.

Charles W Brecknell and Co was founded in 1913 in Birmingham, England and was the first firm to manufacture visible weighers for the wholesale industry. The company continued to expand into the 1920s and was purchased by W & T Avery Limited in 1926.

The Salter brand has also played a part in Brecknell's history, and product was sold under the name Salter Brecknell for several years when Weigh Tronix and Avery Scales merged to form Avery Weigh-Tronix in 2003. The brand has since been re-branded as 'Brecknell' and continues to be sold under this name today.

Brecknell has grown to become a global leader in weighing solutions, designed and manufactured with focus on high-value, accurate scales, for ease of operation in every weighing application.

Brecknell products can be found in the majority of industries worldwide, from industrial weighing equipment, to office and medical scales. Brecknell's global presence ensures the highest quality of service and support to our customers.

Brecknell is part of Avery Weigh-Tronix, a world leading manufacturer of industrial scales, weighing equipment and measurement devices. With a long history dating back to the 1700s, Avery Weigh-Tronix is headquartered in Birmingham, England, and has manufacturing facilities in the UK, USA, Canada, China and India.





Table of Contents

Load Cells/Force Transducers

Canister

BM14A	6
BM14G	7

Double Ended Link Shear Beam

HM9E	8
------	---

Double Ended Shear Beam

B9C	10-11
B9D	12-13
H9C	14-15
H9D	16-17
H9N	18-19
HM9B	20

S Beam

B3G	22-23
H3	24-25
H3F	26-27
H3G	28-29

Shear Beam

B8D	30-31
BM8D	32-33
BM8H	34
BM11	35
H8C	36-37
HM8	38-39
HM8C	40

Single Point

BM6A	41
BM6G	42
L6D	44-45
L6E	46
L6F	48-49
L6G	50
L6I	51
L6N	52-53
L6Q	54
L6T	56-57
L6W	58

Weighing Modules

Double Ended Shear Beams

BM-9-402/B9C	59
BM-9-404/B9D	60
HM-9-401/H9C	61
HM-9-403/H9D	62

Shear Beams

BM-9-404/B8D	63
BM-8-406/BM8H	64
BM-11-401/BM11	65
HM-8-401/HM8	66
HM-8-402/H8	67

Accessories

Canister

BY-14-101 Button	68
BY-14-105 Button	69
BY-14-106 Button	69
BY-14-108 Button	70

S Beam

HL-3-001 Hook	71
HL-3-002 Eye Bolt	71
HL-3-003 Eye Bolt	72
HL-3-004 Hook + Eye Bolt	72
HL-3-005 Hook + Eye Bolt	73

Shear Beam

BJ 8-202 Foot	74
BJ 8-205 Foot	74
BJ 8-215 Foot	75
BJ 8-219 Foot	75
B8-220 Foot	76
BM-11-402 Mount	77
BY-8-104 Cup + Ball	78
BY-8-106 Cup + Ball	78
HD-8-301 Plate	79
HJ 8-201 Foot	79
HJ 8-203 Foot	80
HJ 8-213 Foot	80
HJ 8-218 Foot	81
HY-8-101 Button	82
HY-8-102 Cup + Ball	82

Junction Box

B 02	83
B 05A	84

Wire Guide

Wire Guide	85
------------	----



BM14A

- BM14A load cells are available in the capacities 10t~100t, 25Klb~200Klb
- Stainless steel construction, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium sized. Lightning protected in all kinds of environments.
- Column structure, good self-aligning ability, suitable for electronic platform scales, automobile testing facilities, hopper scales and other electronic weighing devices

Features


- Capacities: 10t~100t; 25Klb~200Klb
- High accuracy
- Easy installation and reliable performance
- Stainless steel construction
- Four column construction
- PTB Approval No.: D09-07.01

Accessories

- BY-14-101



Specifications			
Capacity	t	10/25/40/60/100	
	Klb	25/50/100/200	
Accuracy		C3	N10 Equivalent
Approvals		OIML R60 C3	
Maximum Number of Verification Intervals	Nmax	3000	10000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000	Emax/10000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.017
Output Sensitivity	(mV/V)	2.0±0.002	
Input Resistance	(Ω)	450±4.5	
Output Resistance	(Ω)	480±4.8	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

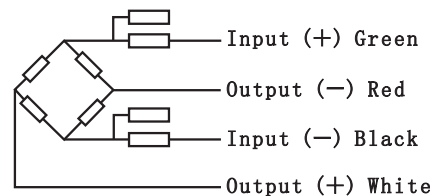


Wiring:

Shielded 4 conductor cable: $\phi 7.5\text{mm}$
 Standard Cable Length: 10t: 10m;
 25t~100t: 20m

Outline Dimensions mm (inch)						
Dimension	10t, 25t	40t, 60t	100t	25Klb, 50Klb	100Klb	200Klb
Capacity						
D	73 (2.87)	105 (4.13)	151.4 (6.0)	73 (2.87)	105 (4.13)	151.4 (6.0)
D1	31.8 (1.25)	58.7 (2.31)	79.4 (3.13)	31.8 (1.25)	58.7 (2.31)	79.4 (3.13)
D2	58 (2.28)	82.5 (3.25)	123.8 (4.87)	58 (2.28)	82.5 (3.25)	123.8 (4.87)
H	82.5 (3.25)	127 (5.0)	184.2 (7.25)	82.5 (3.25)	127 (5.0)	184.2 (7.25)
H1	38.23 (1.5)	65.07 (2.56)	87.35 (3.44)	38.23 (1.5)	65.07 (2.56)	87.35 (3.44)
H2	7.75 (0.31)	9.4 (0.37)	23.15 (0.91)	7.75 (0.31)	9.4 (0.37)	23.15 (0.91)
H3	2.6 (0.10)	4 (0.16)	3.7 (0.15)	2.6 (0.10)	4 (0.16)	3.7 (0.15)
L	64 (2.52)	87 (3.43)	108.2 (4.26)	64 (2.52)	87 (3.43)	108.2 (4.26)
M	M12X1.75	M20x2.5	M20x2.5	1/2-20UNF	3/4-16UNF	3/4-16UNF

Part Number	Capacity	Ship Weight
BM14A-C3-10t	10T stainless column type	7 lb
BM14A-C3-25t	25T stainless column type	9 lb
BM14A-C3-40t	40T stainless column type	18 lb
BM14A-C3-60t	60T stainless column type	18 lb
BM14A-C3-100t	100T stainless column type	37 lb
BM14A-N10-25K	25K stainless column type	7 lb
BM14A-N10-50K	50K stainless column type	9 lb
BM14A-N10-100K	100K stainless column type	18 lb
BM14A-N10-200K	200K stainless column type	37 lb

Compatible Products	
Manufacturer	Model
Revere	CAP
Sensortronics	65088-1000
Coti	CP26S5
Artech	90310
Rice Lake	RLCSP1
Totalcomp	TCSP1

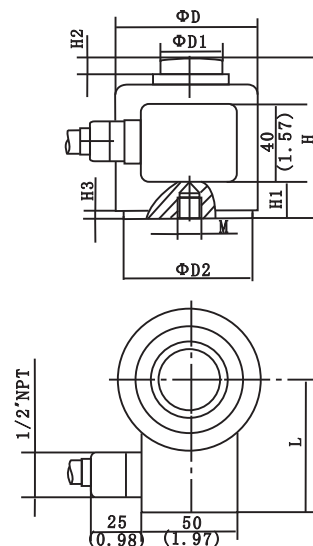



BM14G

- BM14G load cells are available in the capacities 10t~50t
- Stainless steel construction, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium sized. Lightning protected in all kinds of environments.
- Column structure, anti-reversal design, good self-aligning ability, suitable for electronic platform scales, automobile testing facilities, hopper scales and other electronic weighing devices

Features


- Capacities: 10t~50t
- High accuracy
- Stainless steel construction
- Easy installation and reliable performance
- OIML Cert. No.: R60/2000-CN1-06.07
- NTEP Cert. No.: CC10-087

Accessories

- BY-14-105 (alternative pn BY-14-125)
- BY-14-106 (alternative pn BY-14-126)
- BY-14-108



Specifications		
Capacity	t	10/20/30/40/50
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.02
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	703±4
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

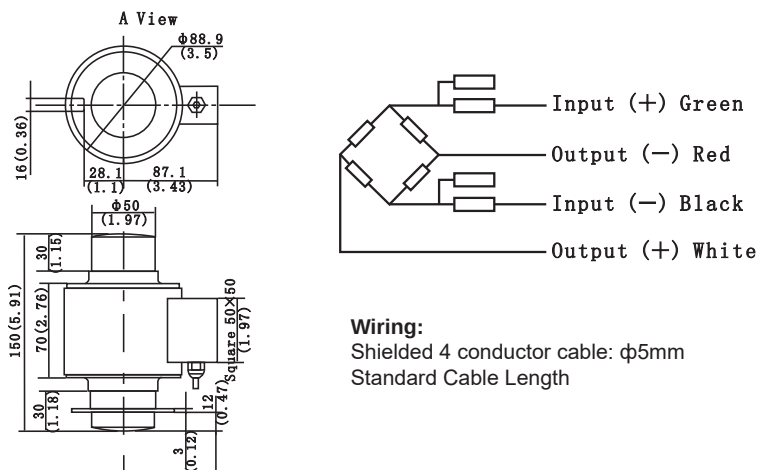

Part Number	Capacity	Ship Weight
BM14G-C3-10t	10T stainless column type	9 lb
BM14G-C3-20t	20T stainless column type	9 lb
BM14G-C3-30t	30T stainless column type	9 lb
BM14G-C3-40t	40T stainless column type	9 lb
BM14G-C3-50t	50T stainless column type	9 lb

Compatible Products	
Manufacturer	Model
Revere	ASC



HM9E

- HM9E load cells are available in the capacities 5Klb~200Klb
- Alloy steel construction, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales and other electronic weighing devices



Features

- Capacities: 50K~200Klb
- Easy installation and reliable performance
- High accuracy
- OIML Cert. No.: R60/2000-NL1-10.15
- Alloy steel construction
- NTEP Cert. No.: CC10-057A1



Specifications		
Capacity	Klb	50/65/100/125/200
Accuracy		N10
Maximum Number of Verification Intervals	Nmax	10000
Minimum Load Cell Verification Intervals	Vmin	E _{max} /10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.003
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	703±4
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

Outline Dimensions mm (inch)											
Dimension	L	L1	H	H1	W	W1	ΦD	ΦD1	R1	R2	
Capacity											
500Klb~125Klb	260 (10.24)	215.9 (8.5)	76.2 (3.0)	7 (0.28)	76 (2.99)	55.9 (2.2)	Φ61 (2.4)	Φ52.3 (2.06)	R25.4 (1.0)	R25.4 (1.0)	
200Klb	304 (11.97)	254 (10.0)	86.36 (3.4)	10 (0.39)	86.36 (3.40)	63.5 (2.5)	Φ70 (2.76)	Φ59.7 (2.35)	R38.1 (1.5)	R38.1 (1.5)	

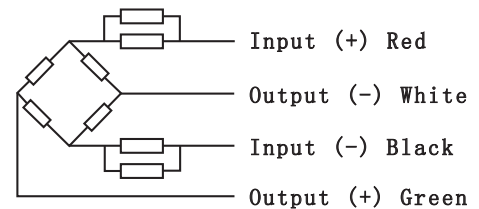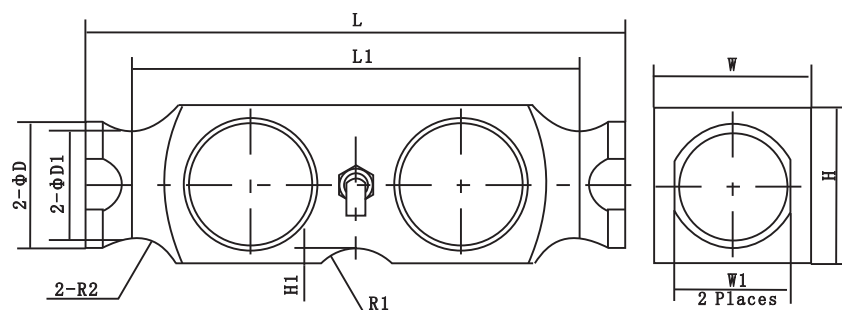

Wiring:

Shielded 4 conductor cable
Standard Cable Length: 12.2m
Cable Diameter: Φ5mm

Part Number	Capacity	Ship Weight
HM9E-N10-50K	50K alloy dual shear beam	20 lb
HM9E-N10-65K	65K alloy dual shear beam	22 lb
HM9E-N10-100K	100K alloy dual shear beam	22 lb
HM9E-N10-125K	125K alloy dual shear beam	22 lb
HM9E-N10-200K	200K alloy dual shear beam	31 lb

Compatible Products	
Manufacturer	Model
Revere	5223
Celtron	HED
Sensortronics	65040-1127W
Coti	CI-5223
Artech	80210
Rice Lake	RL75223
Thurman	TSC800

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



B9C

- B9C load cells are available in the capacities 5Klb~250Klb
- Stainless steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales, tank scales and other electronic weighing devices

Features

- Capacities: 5Klb~250Klb
- High accuracy
- Stainless steel construction
- Easy installation and reliable performance
- Low profile
- NTEP Cert. No.: 07-018A1

Weighing Module

- BM-9-402
- HM-9-401





Specifications			
Capacity	Klb	5/10/20/30/40/50/60/75/90/100/150/200/250	
Accuracy		N3	N10
Maximum Number of Verification Intervals	Nmax	3000	10000
Minimum Number of Verification Intervals	Vmin	Emax/3000	Emax/10000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.020	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.020	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.008	
Input Resistance	(Ω)	700±7	
Output Resistance	(Ω)	703±4	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Part Number	Capacity	Ship Weight
B9C-N3-5K-9B	5K stainless dual shear beam	4 lb
B9C-N10-10K-9B	10K stainless dual shear beam	4 lb
B9C-N10-20K-9B	20K stainless dual shear beam	9 lb
B9C-N10-30K-9B	30K stainless dual shear beam	20 lb
B9C-N10-40K-9B	40K stainless dual shear beam	20 lb
B9C-N10-50K-9B	50K stainless dual shear beam	22 lb
B9C-N10-60K-9B	60K stainless dual shear beam	22 lb
B9C-N10-75K-9B	75K stainless dual shear beam	22 lb
B9C-N10-90K-9B	90K stainless dual shear beam	22 lb
B9C-N10-100K-9B	100K stainless dual shear beam	29 lb
B9C-N3-150K-9B	150K stainless dual shear beam	35 lb
B9C-N3-200K-9B	200K stainless dual shear beam	93 lb
B9C-N3-250K-9B	250K stainless dual shear beam	99 lb

Compatible Products	
Manufacturer	Model
Revere	9103
Coti	CI-5103-SSW
Rice Lake	RL7100HE



Outline Dimensions mm (inch)								
Dimension	L	L1	L2	L3	ΦD	H	Φd	R
Capacity (Klb)								
5~10	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	15.7 (0.62)	Φ43.2 (1.7)	28.4 (1.12)	Φ16.7 (0.66)	R12.7 (0.5)
20	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	21.3 (0.84)	Φ49.5 (1.95)	28.4 (1.12)	Φ16.7 (0.66)	R12.7 (0.5)
30~75	260.4 (10.25)	215.9 (8.5)	165.2 (6.5)	25.4 (1.0)	Φ76.2 (3.0)	60.2 (2.37)	Φ26.9 (1.06)	R25.4 (1.0)
90~100	285.8 (11.25)	241.3 (9.5)	190.2 (7.49)	31.0 (1.22)	Φ88.9 (3.5)	63.5 (2.5)	Φ26.9 (1.06)	R38.1 (1.5)
150	285.8 (11.25)	241.3 (9.5)	190.2 (7.49)	31.0 (1.22)	Φ99.1 (3.9)	71.1 (2.8)	Φ26.9 (1.06)	R38.1 (1.5)
200~250	408.9 (16.1)	330.2 (13.0)	254.0 (10.0)	31.7 (1.25)	Φ136.6 (5.38)	116.8 (4.6)	Φ39.6 (1.56)	R50.8 (2.0)

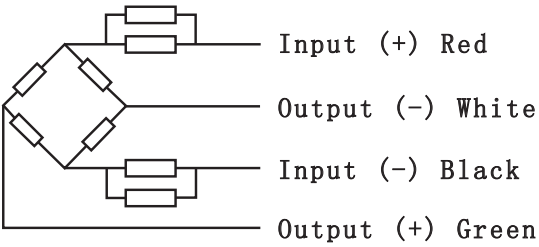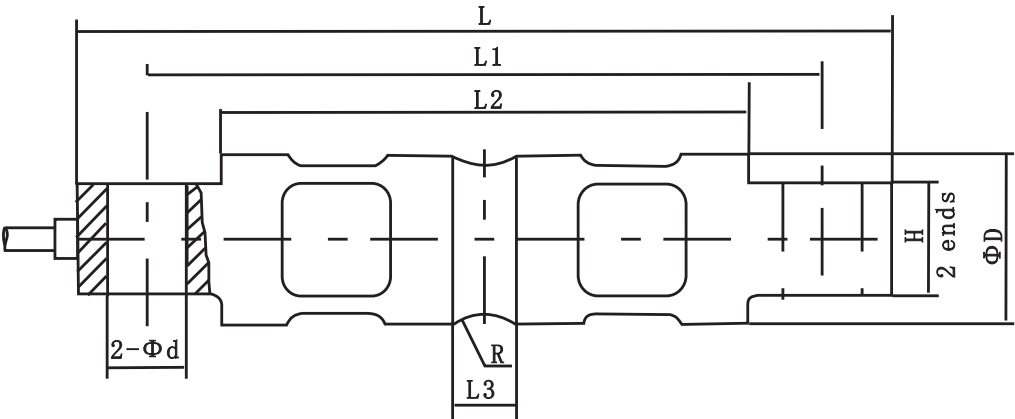

Wiring:
 Shielded 4 conductor cable
 Standard Cable Length: 9.3m
 Cable Diameter: Φ5mm (5K-20K); Φ8mm (30K-250K)



B9D

- B9D load cells are available in the capacities 1Klb~75Klb
- Stainless steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales, tank scales and other electronic weighing devices

Features

- Capacities: 1Klb~75Klb
- High accuracy
- Stainless steel construction
- Easy installation and reliable performance
- Low profile

Weighing Module

- BM-9-404
- HM-9-403





Specifications		
Capacity	Klb	1/1.5/2/2.5/3/4/5/10/15/20/25/35/50/75
Accuracy		N3 Equivalent
Maximum Number of Verification Intervals	Nmax	10000
Minimum Number of Verification Intervals	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.050
Creep	(%FS/30min)	≤±0.040
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.040
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	3.0±0.008
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	703±4
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

Part Number	Capacity	Ship Weight
B9D-N3-1K-6B	1K stainless dual shear beam	4 lb
B9D-N3-1.5K-6B	1.5K stainless dual shear beam	4 lb
B9D-N3-2K-6B	2K stainless dual shear beam	4 lb
B9D-N3-2.5K-6B	2.5K stainless dual shear beam	4 lb
B9D-N3-3K-6B	3K stainless dual shear beam	4 lb
B9D-N3-4K-6B	4K stainless dual shear beam	4 lb
B9D-N3-5K-6B	5K stainless dual shear beam	4 lb
BB9D-N3-10K-6B	10K stainless dual shear beam	7 lb
B9D-N3-15K-6B	15K stainless dual shear beam	7 lb
B9D-N3-20K-6B	20K stainless dual shear beam	7 lb
B9D-N3-25K-6B	25K stainless dual shear beam	7 lb
B9D-N3-35K-6B	35K stainless dual shear beam	7 lb
B9D-N3-50K-6B	50K stainless dual shear beam	26 lb
B9D-N3-75K-6B	75K stainless dual shear beam	26 lb

Compatible Products	
Manufacturer	Model
Revere	9203
Celtron	DSR-HSS
Sensortronics	65016W
Coti	CI-16-SSW
Rice Lake	RL75016SS
Vishay	DSR-HSS



Outline Dimensions mm (inch)							
Dimension	L	L1	L2	ΦD	Φd	H	W
Capacity (Klb)							
1~5	190.5 (7.5)	150.87 (5.94)	30.48 (1.2)	$\Phi 31.5$ (1.24)	$\Phi 12.7$ (0.5)	30.99 (1.22)	30.99 (1.22)
10~35	222.25 (8.75)	190.5 (7.5)	41.15 (1.62)	$\Phi 50.8$ (2.0)	$\Phi 20.57$ (0.81)	49.15 (1.94)	36.45 (1.44)
50~75	342.9 (13.5)	292.1 (11.5)	82.55 (3.25)	$\Phi 75.95$ (2.99)	$\Phi 33.32$ (1.31)	74.68 (2.94)	61.98 (2.44)

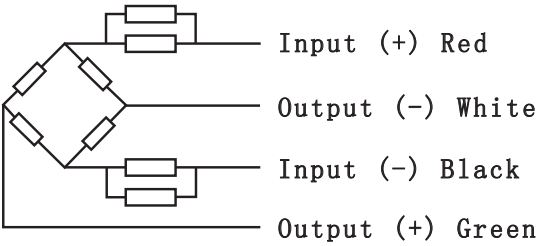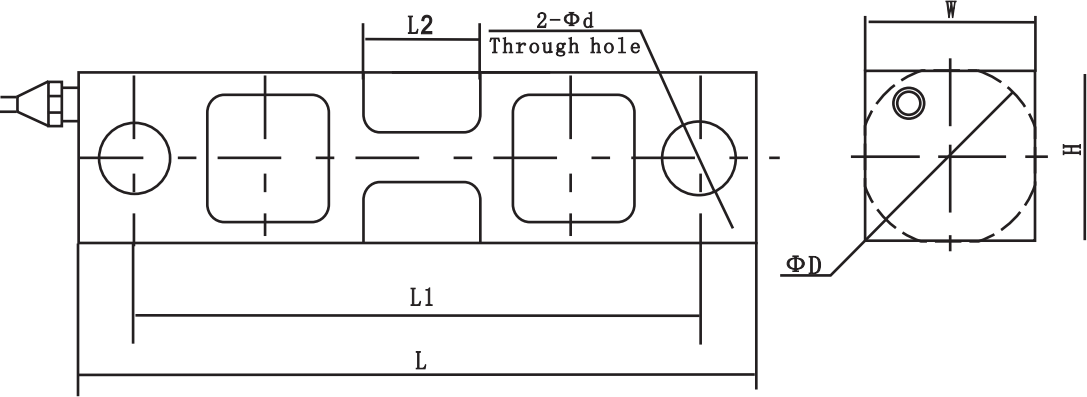

Wiring:
 Shielded 4 conductor cable
 Standard Cable Length: 6.2m
 Cable Diameter: $\Phi 5\text{mm}$



H9C

- H9C load cells are available in the capacities 5Klb~250Klb
- Alloy steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales, tank scales and other electronic weighing devices

Features

- Capacities: 5Klb~250Klb
- High accuracy
- Alloy steel construction
- Easy installation and reliable performance
- Low profile
- NTEP Cert. No.: CC07-018A1

Weighing Module

- BM-9-402
- HM-9-401





Specifications			
Capacity	Klb	5/10/20/30/40/50/60/75/100/150/200/250	
Accuracy		N3	N10
Maximum Number of Verification Intervals	Nmax	3000	10000
Minimum Number of Verification Intervals	Vmin	Emax/3000	Emax/10000
Combined Error	(%FS)	≤±0.030	≤±0.020
Creep	(%FS/30min)	≤±0.030	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.020	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.025	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.008	
Input Resistance	(Ω)	700±7	
Output Resistance	(Ω)	703±4	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Part Number	Capacity	Ship Weight
H9C-N3-5K	5K alloy dual shear beam	4 lb
H9C-N3-10K	10K alloy dual shear beam	4 lb
H9C-N3-200K	200K alloy dual shear beam	93 lb
H9C-N3-250K	250K alloy dual shear beam	99 lb
H9C-N10-20K	20K alloy dual shear beam	9 lb
H9C-N10-30K	30K alloy dual shear beam	20 lb
H9C-N10-40K	40K alloy dual shear beam	20 lb
H9C-N10-50K	50K alloy dual shear beam	22 lb
H9C-N10-60K	60K alloy dual shear beam	22 lb
H9C-N10-75K	75K alloy dual shear beam	22 lb
H9C-N10-100K	100K alloy dual shear beam	29 lb
H9C-N10-150K	150K alloy dual shear beam	35 lb

Compatible Products	
Manufacturer	Model
Revere	5103

Outline Dimensions mm (inch)								
Dimension	L	L1	L2	L3	ΦD	H	Φd	R
Capacity (Klb)								
5~10	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	15.7 (0.62)	$\Phi 43.2$ (1.7)	28.4 (1.12)	$\Phi 16.7$ (0.66)	R12.7 (0.5)
20	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	21.3 (0.84)	$\Phi 49.5$ (1.95)	28.4 (1.12)	$\Phi 16.7$ (0.66)	R12.7 (0.5)
30~75	260.4 (10.25)	215.9 (8.5)	165.1 (6.5)	25.4 (1.0)	$\Phi 76.2$ (3.0)	60.2 (2.37)	$\Phi 26.9$ (1.06)	R25.4 (1.0)
100	285.8 (11.25)	241.3 (9.5)	190.2 (7.49)	31.0 (1.22)	$\Phi 88.9$ (3.5)	63.5 (2.5)	$\Phi 26.9$ (1.06)	R38.1 (1.5)
150	285.8 (11.25)	241.3 (9.5)	190.2 (7.49)	31.0 (1.22)	$\Phi 99.1$ (3.9)	71.1 (2.8)	$\Phi 26.9$ (1.06)	R38.1 (1.5)
200~250	408.9 (16.1)	330.3 (13.0)	254.0 (10.0)	31.7 (1.25)	$\Phi 136.6$ (5.38)	116.8 (4.6)	$\Phi 39.6$ (1.56)	R50.8 (2.0)

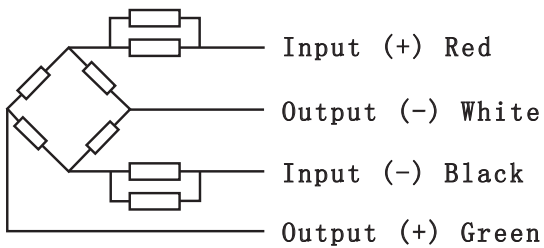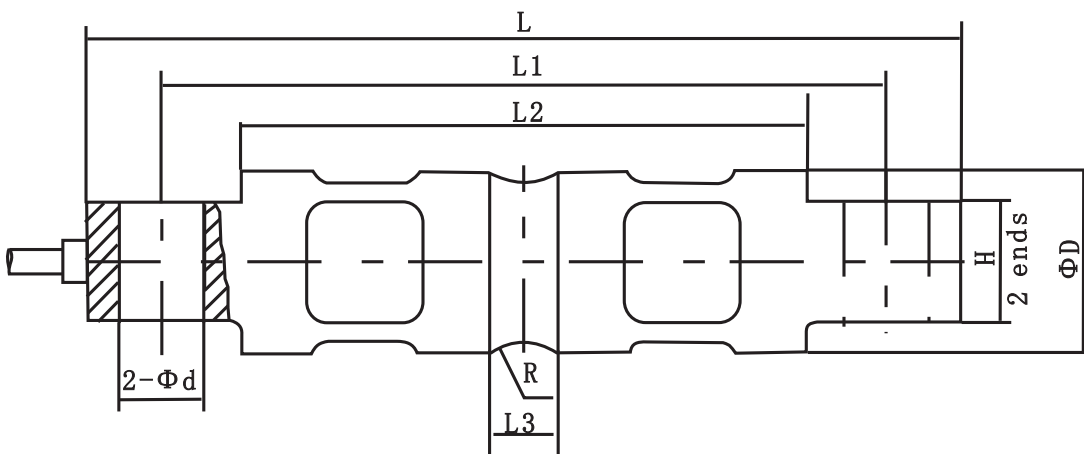

Wiring:
 Shielded 4 conductor cable
 Standard Cable Length: 9.3m
 Cable Diameter: $\Phi 5\text{mm}$ (5Klb~20Klb); $\Phi 8\text{mm}$ (30Klb~250Klb)



H9D

- H9D load cells are available in the capacities 1Klb~75Klb
- Alloy steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales, tank scales and other electronic weighing devices

Features

- Capacities: 1Klb~75Klb
- High accuracy
- Low profile

Weighing Module

- BM-9-404
- HM-9-403





Specifications		
Capacity	Klb	1/1.5/2/2.5/4/5/10/15/20/25/35/50/75
Accuracy		N3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /3000
Combined Error	(%FS)	±0.030
Creep	(%FS/30min)	±0.030
Temperature Effect on Sensitivity	(%FS/10°C)	±0.020
Temperature Effect on Zero	(%FS/10°C)	±0.025
Output Sensitivity	(mV/V)	3.0±0.008
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	703±4
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

Part Number	Capacity	Ship Weight
H9D-N3-1K-6B	1K alloy dual shear beam	2 lb
H9D-N3-1.5K-6B	1.5K alloy dual shear beam	2 lb
H9D-N3-2K-6B	2K alloy dual shear beam	2 lb
H9D-N3-2.5K-6B	2.5K alloy dual shear beam	2 lb
H9D-N3-4K-6B	4K alloy dual shear beam	2 lb
H9D-N3-5K-6B	5K alloy dual shear beam	2 lb
H9D-N3-10K-6B	10K alloy dual shear beam	7 lb
H9D-N3-15K-6B	15K alloy dual shear beam	7 lb
H9D-N3-20K-6B	20K alloy dual shear beam	7 lb
H9D-N3-25K-6B	25K alloy dual shear beam	7 lb
H9D-N3-35K-6B	35K alloy dual shear beam	7 lb
H9D-N3-50K-6B	50K alloy dual shear beam	26 lb
H9D-N3-75K-6B	75K alloy dual shear beam	26 lb

Compatible Products	
Manufacturer	Model
Revere	5203
Celtron	DSR
Sensortronics	65016
Coti	CI-16
Artech	70510
Rice Lake	RL75016
Vishay	DSR



Outline Dimensions mm (inch)							
Dimension	L	L1	L2	ΦD	Φd	H	W
Capacity (Klb)							
1~5	190.5 (7.5)	150.87 (5.94)	30.48 (1.2)	Φ31.5 (1.24)	Φ12.7 (0.5)	30.99 (1.22)	30.99 (1.22)
10~35	222.25 (8.75)	190.5 (7.5)	41.15 (1.62)	Φ50.8 (2.0)	Φ20.57 (0.81)	49.15 (1.94)	36.45 (1.44)
50~75	342.9 (13.5)	292.1 (11.5)	82.55 (3.25)	Φ75.95 (2.99)	Φ33.32 (1.31)	74.68 (2.94)	61.98 (2.44)

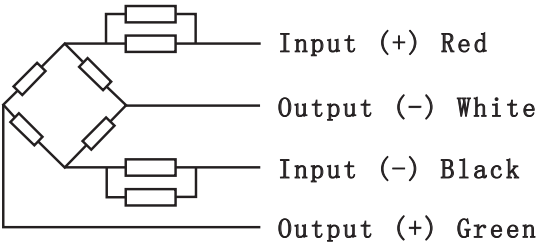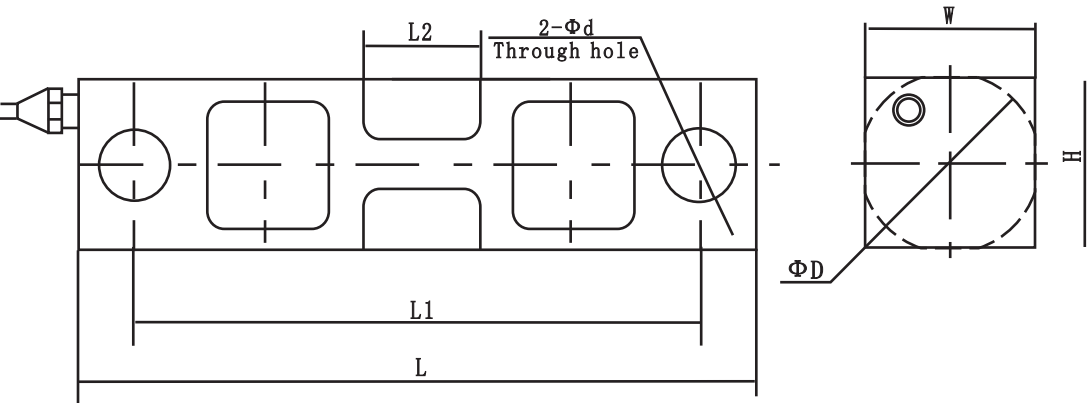

Wiring:
 Shielded 4 conductor cable
 Standard Cable Length: 6.2m
 Cable Diameter: Φ5mm



H9N

- H9N load cells are available in the capacities 25Klb~200Klb
- Alloy steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, hopper scales, track scales and other electronic weighing devices

Features

- Capacities: 25Klb~200Klb
- High accuracy
- Alloy steel construction
- Easy installation and reliable performance
- NTEP Cert. No.: 10-057A1



Specifications		
Capacity	Klb	25/40/50/60/75/100/125/150/200
Accuracy		N10
Maximum Number of Verification Intervals	Nmax	10000
Minimum Number of Verification Intervals	Vmin	E _{max} /10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.02
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.003
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	703±4
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300



Part Number	Capacity	Ship Weight
H9N-N10-25K-9B	25K alloy dual shear beam	4 lb
H9N-N10-40K-9B	40K alloy dual shear beam	20 lb
H9N-N10-50K-9B	50K alloy dual shear beam	22 lb
H9N-N10-60K-9B	60K alloy dual shear beam	22 lb
H9N-N10-75K-9B	75K alloy dual shear beam	22 lb
H9N-N10-100K-9B	100K alloy dual shear beam	29 lb
H9N-N10-125K-9B	125K alloy dual shear beam	29 lb
H9N-N10-150K-9B	150K alloy dual shear beam	44 lb
H9N-N10-200K-9B	200K alloy dual shear beam	44 lb

Compatible Products	
Manufacturer	Model
Celtron	DLB
Sensortronics	65058
Coti	CI-58
Rice Lake	RL75058
Vishay	CLB



Outline Dimensions mm (inch)

Dimension	L	L1	L2	H	H1	H2	Φd	W	Ra
Capacity									
25Klb	197 (7.75)	35 (1.38)	165 (6.5)	49.3 (1.94)	43.2 (1.7)	41.4 (1.63)	Φ17.3 (0.68)	43 (1.7)	R19.1 (0.75)
40Klb	260.4 (10.25)	49 (1.93)	216 (8.5)	62 (2.44)	53.3 (2.1)	50.8 (2.0)	Φ20.6 (0.81)	49.3 (1.94)	R25.4 (1.0)
50~75Klb	260.4 (10.25)	49 (1.93)	216 (8.5)	74.7 (2.94)	67.3 (2.65)	64.5 (2.54)	Φ26.9 (1.06)	62 (2.44)	R25.4 (1.0)
100~125Klb	387.4 (15.25)	79.5 (3.13)	324 (12.76)	98 (3.86)	87.1 (3.43)	83.8 (3.3)	Φ41.2 (1.62)	73.7 (2.9)	R38.1 (1.5)
150~200Klb	489 (19.25)	127.8 (5.03)	387.4 (15.25)	147.3 (5.8)	130.1 (5.12)	112.8 (4.44)	Φ41.2 (1.62)	96.5 (3.8)	R50.8 (2.0)

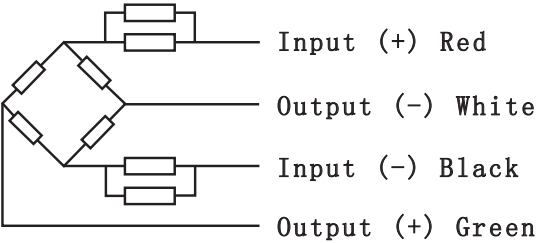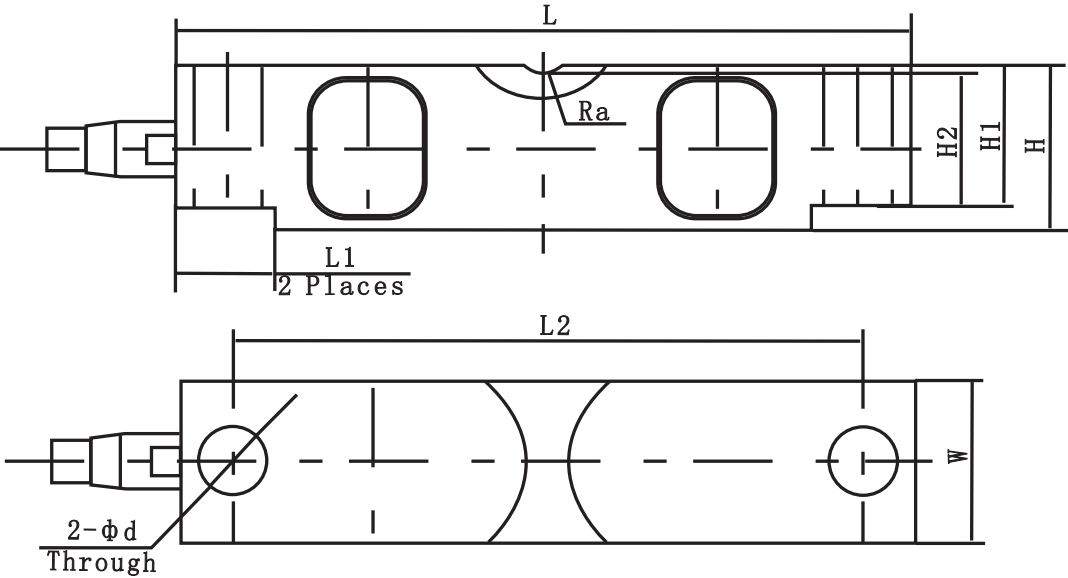

Wiring:
 Shielded 4 conductor cable: Φ5mm (≤40Klb); Φ8mm (≥50Klb)
 Standard Cable Length: 9.3m

Double Ended Shear Beams



HM9B


- HM9B load cells are available in the capacities 10t~50t
- Alloy steel construction, nickel plated, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Dual shear beam, suitable for electronic truck scales, railway scales and other electronic weighing devices

Features


- Capacities: 10t~50t
- Easy installation and reliable performance
- High accuracy
- OIML Cert. No.: R60/2000-CNI-06.06
- Alloy steel construction
- PTB Approval No.: D09-06.08



Specifications		
Capacity	t	10/20/25/30/40/40tLE/50
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Intervals	Vmin	E _{max} /10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.002
Input Resistance	(Ω)	700±7
Output Resistance	(Ω)	700±7
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

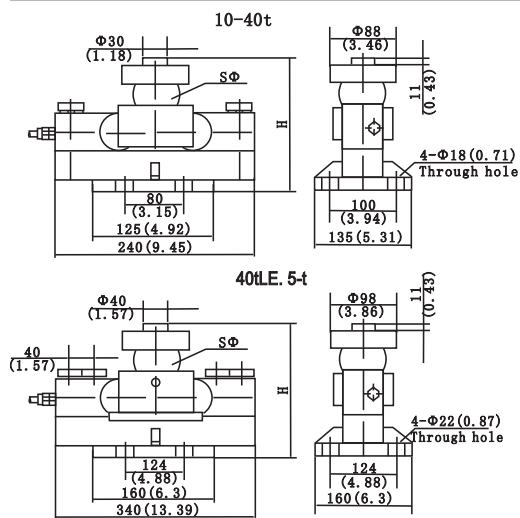

Outline Dimensions mm (inch)			
Capacity	10t	20t~40t	40tLE, 50t
Dimension			
H	195 (7.68)	225 (8.86)	267 (10.51)
SΦ	50 (1.97)	76 (2.99)	82 (3.22)

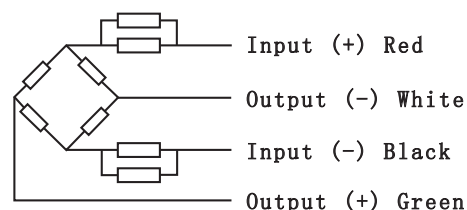

Wiring:

Shielded 4 conductor cable: Φ5.5mm
Standard Cable Length: 12m

Part Number	Capacity	Ship Weight
HM9B-C3-10t	10T dual shear beam	35 lb
HM9B-C3-20t	20T dual shear beam	40 lb
HM9B-C3-25t	25T dual shear beam	40 lb
HM9B-C3-30t	30T dual shear beam	40 lb
HM9B-C3-40tSE	40T SE dual shear beam	40 lb
HM9B-C3-40tLE	40T LE dual shear beam	55 lb
HM9B-C3-50t	50T dual shear beam	55 lb

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



B3G

- B3G load cells are available in the capacities 50kg~10t and 50lb~10Klb
- Stainless steel, sealed by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features

- Capacities: 50kg~10t; 50lb~10Klb
- High accuracy
- Stainless steel construction
- Low profile
- OIML Cert. No.: R60/2000-CNI-06.02
- PTB Approval No.: D09-06.07
- NTEP Cert. No.: CC06-099A1

Accessory

- HL-3-001
- HL-3-002
- HL-3-003
- HL-3-004
- HL-3-005





Specifications				
Capacity	t	50kg/100kg/250kg/500kg/1t/2.5t/5t/7.5t/10t		
	lb	50/75/100/150/200/250/300/500/750/1K/1.5K/2K/2.5K/3K/5K/10K		
Accuracy		C3	N3	N10
Approvals		OIML R60 C3		
Maximum Number of Verification Intervals	Nmax	3000	3000	10000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000	Emax/3000	Emax/10000
Combined Error	(%FS)	≤±0.020	≤±0.030	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.030	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.020	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.025	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.008		
Input Resistance	(Ω)	430±60		
Output Resistance	(Ω)	351±2.0		
Insulation Resistance	(MΩ)	≥5000 (50VDC)		
Zero Balance	(%FS)	1.0		
Temperature, Compensated	(°C)	-10~+40		
Temperature, Operating	(°C)	-35~+70		
Excitation, Recommended	(V)	5~12 (DC)		
Excitation, Max	(V)	18 (DC)		
Safe Overload	(%FS)	150		
Ultimate Overload	(%FS)	300		

Outline Dimensions mm (inch)						
Dimension (mm)	L	H	W1	W	M	H1
Capacity						
50kg, 100kg	50.8 (2.0)	60.96 (2.4)	11.68 (0.46)	15.06 (0.59)	M8	8.89 (0.35)
50lb~300lb					1/4-28UNF	
250kg, 500kg					M12	
500lb~1.5klb	50.8 (2.0)	60.96 (2.4)	18.03 (0.71)	21.4 (0.84)	1/2-20UNF	8.89 (0.35)
1t					M12	
2, 2.5Klb					1/2-20UNF	
2.5t	76.2 (3.0)	99.06 (3.9)	24.38 (0.96)	27.76 (1.09)	M20x1.5	13.97 (0.55)
3Klb					1/2-20UNF	
5t					M20x1.5	
10Klb	74.68 (2.94)	99.06 (3.9)	30.74 (1.21)	34.12 (1.34)	3/4-16UNF	15.75 (0.62)
7.5t					M24x2	
15Klb					1-14UNS	
10t	112.78 (4.44)	177.8 (7.0)	42.93 (1.69)	46.31 (1.82)	M30x2	39.9 (1.57)
20Klb					1 1/4-12UNS	
5klb	76.2 (3.0)	99.06 (3.9)	24.38 (0.96)	27.76 (1.09)	3/4-16UNF	13.97 (0.55)



Part Number	Capacity	Ship Weight
B3G-C3-50KG-6B	50KG stainless "S" beams metric	2 lb
B3G-C3-100KG-6B	100KG stainless "S" beams metric	2 lb
B3G-C3-250KG-6B	250KG stainless "S" beams metric	2 lb
B3G-C3-500KG-6B	500KG stainless "S" beams metric	2 lb
B3G-C3-1.0t-6B	1T stainless "S" beams metric	2 lb
B3G-C3-2.5t-6B	2.5T stainless "S" beams metric	2 lb
B3G-C3-5.0t-6B	5T stainless "S" beams metric	2 lb
B3G-C3-7.5t-6B	7.5T stainless "S" beams metric	7 lb
B3G-C3-10t-6B	10T stainless "S" beams metric	13 lb
B3G-N3-50-6YB	50LB Stainless "S"Beams Imperial	2 lb
B3G-N3-75-6YB	75LB Stainless "S"Beams Imperial	2 lb
B3G-N3-15K-6YB	15K Stainless "S"Beams Imperial	7 lb
B3G-N3-20K-6YB	20K Stainless "S"Beams Imperial	13 lb
B3G-N10-100-6YB	100LB Stainless "S"Beams Imperial	2 lb
B3G-N10-150-6YB	150LB Stainless "S"Beams Imperial	2 lb
B3G-N10-200-6YB	200LB Stainless "S"Beams Imperial	2 lb
B3G-N10-250-6YB	250LB Stainless "S"Beams Imperial	2 lb
B3G-N10-300-6YB	300LB Stainless "S"Beams Imperial	2 lb
B3G-N10-500-6YB	500LB Stainless "S"Beams Imperial	2 lb
B3G-N10-750-6YB	750LB Stainless "S"Beams Imperial	2 lb
B3G-N10-1K-6YB	1K Stainless "S"Beams Imperial	2 lb
B3G-N10-1.5K-6Y	1.5K Stainless "S"Beams Imperial	2 lb
B3G-N10-2K-6YB	2K Stainless "S"Beams Imperial	2 lb
B3G-N10-2.5K-6Y	2.5K Stainless "S"Beams Imperial	2 lb
B3G-N10-3K-6YB	3K Stainless "S"Beams Imperial	4 lb
B3G-N10-5K-6YB	5K Stainless "S"Beams Imperial	4 lb
B3G-N10-10K-6YB	10K Stainless "S"Beams Imperial	4 lb

Compatible Products	
Manufacturer	Model
Revere	M9363
Celtron	STC
Sensortronics	60050

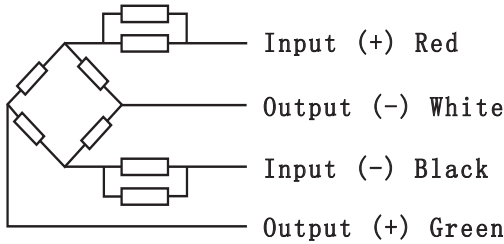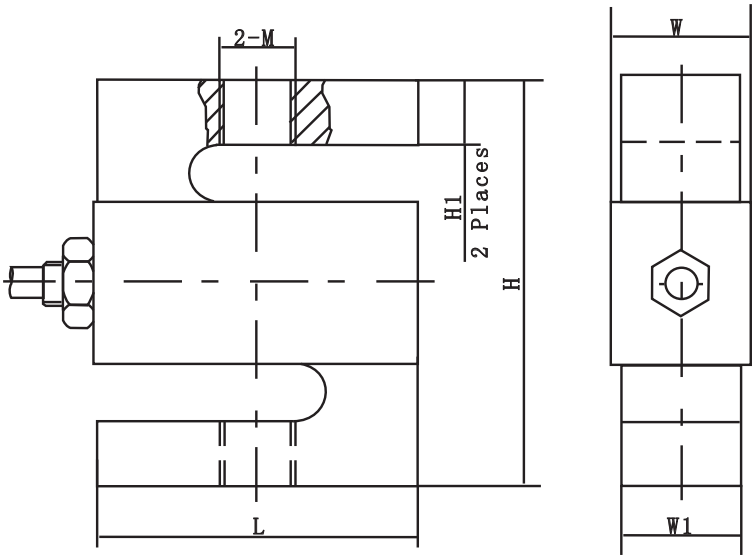

Wiring:
 Shielded 4 conductor cable: $\Phi 5\text{mm}$
 Standard Cable Length: 6m



H3

- H3 load cells are available in the capacities 25kg~30t and 100lb~20Klb
- Alloy steel, sealed by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features

- Capacity: 25kg~30t; 100lb~20Klb
- High accuracy
- Alloy steel construction
- Low profile

- OIML Cert. No.: R60/2000-CN-00.01
- PTB Approval No: D09-03.18 Revision 2
- NTEP Cert. No.: CC06-099A1

Accessory

- HL-3-001
- HL-3-002
- HL-3-003
- HL-3-004
- HL-3-005



Specifications			
Capacity	t	25kg/50kg/100kg/150kg/200kg/250kg/300kg/500kg/600kg/750kg/1t/1.5t/2t/2.5t/3t/5t/7.5t/10t/15t/20t/30t	
	lb	100/150/200/250/300/500/750/1K/1.5K/2K/2.5K/3K/5K/10K/15K/20K	
Accuracy		C3	N10
Approvals		OIML R60 C3	
Maximum Number of Verification Intervals	Nmax	3000	10000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000	Emax/10000
Combined Error	(%FS)	≤±0.020	≤±0.20
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.017
Output Sensitivity	(mV/V)	2.0±0.004 (Metric)	3.0±0.008 (Imperial)
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	351±2.0	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.5 (Metric)	1.0 (Imperial)
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Outline Dimensions mm (inch)						
Dimension (mm)	H	L	W1	W	M	H1±0.4
Capacity (t)						
25kg~50kg	76.2 (3.0)	50.8 (2.0)	12.7 (0.5)	16.1 (0.63)	M8	15.7 (0.62)
0.1t~0.15t	76.2 (3.0)	50.8 (2.0)	19.0 (0.75)	22.4 (0.88)	M10x1.5	15.3 (0.60)
0.2t~0.75t	76.2 (3.0)	50.8 (2.0)	19.0 (0.75)	22.4 (0.88)	M10x1.5	15.3 (0.60)
1t~1.5t	76.2 (3.0)	50.8 (2.0)	25.4 (1.0)	28.8 (1.13)	M12x1.75	12.1 (0.18)
2t~5t	101.6 (4.0)	76.2 (3.0)	25.4 (1.0)	28.8 (1.13)	M20x1.5	20 (0.79)
7.5t~10t	175 (6.89)	125 (4.92)	50 (1.97)	-	M33x3	40.2 (1.58)
15t~20t	200 (7.89)	160 (6.3)	60 (2.36)	-	M42x3	51 (2.01)
30t	230 (9.06)	190 (7.48)	80 (3.15)	-	M42x3	57.5 (2.26)
100lb~300lb	63.5 (2.5)	50.8 (2.0)	12.7 (0.5)	15.9 (0.63)	1/4-28UNF	10.16 (0.4)
500lb	63.5 (2.5)	50.8 (2.0)	19.05 (0.75)	22.25 (0.88)	1/2-20UNF	
0.75Klb~1.5Klb	63.5 (2.5)	50.8 (2.0)	19.05 (0.75)	22.25 (0.88)	1/2-20UNF	
2Klb~2.5Klb	63.5 (2.5)	50.8 (2.0)	25.4 (1.0)	28.6 (1.13)	1/2-20UNF	
3Klb	101.6 (4.0)	76.2 (3.0)	25.4 (1.0)	28.6 (1.13)	1/2-20UNF	15.24 (0.06)
5Klb~10Klb	101.6 (4.0)	76.2 (3.0)	25.4 (1.0)	28.6 (1.13)	3/4-16UNF	15.24 (0.06)
15Klb	139.7 (5.5)	101.6 (4.0)	31.75 (1.25)	34.95 (1.38)	1-14UNS	31 (1.22)
20Klb	177.8 (7.0)	127 (5.0)	50.8 (2.0)	54 (2.13)	1 1/4-12UNF	39.9 (1.57)





Part Number	Capacity	Ship Weight
H3-C3-25KG-3B	25KG alloy "S" beam metric	2 lb
H3-C3-50KG-3B	50KG alloy "S" beam metric	2 lb
H3-C3-100KG-3B	100KG alloy "S" beam metric	2 lb
H3-C3-150KG-3B	150KG alloy "S" beam metric	2 lb
H3-C3-200KG-3B	200KG alloy "S" beam metric	2 lb
H3-C3-250KG-3B	250KG alloy "S" beam metric	2 lb
H3-C3-300KG-3B	300KG alloy "S" beam metric	2 lb
H3-C3-500KG-3B	500KG alloy "S" beam metric	2 lb
H3-C3-600KG-3B	600KG alloy "S" beam metric	2 lb
H3-C3-750KG-3B	750KG alloy "S" beam metric	2 lb
H3-C3-1.0t-3B	1T alloy "S" beam metric	2 lb
H3-C3-1.5t-3B	1.5T alloy "S" beam metric	2 lb
H3-C3-2.0t-6B	2T alloy "S" beam metric	4 lb
H3-C3-2.5t-6B	2.5T alloy "S" beam metric	4 lb
H3-C3-3.0t-6B	3T alloy "S" beam metric	4 lb
H3-C3-5.0t-6B	5T alloy "S" beam metric	4 lb
H3-C3-7.5t-6B	7.5T alloy "S" beam metric	15 lb
H3-C3-10t-6B	10T alloy "S" beam metric	15 lb
H3-C3-15t-6B	15T alloy "S" beam metric	29 lb
H3-C3-20t-6B	20T alloy "S" beam metric	29 lb
H3-C3-30t-6B	30T alloy "S" beam metric	53 lb
H3-N10-100-6YB	100LB alloy "S" beam imperial	2 lb
H3-N10-150-6YB	150LB alloy "S" beam imperial	2 lb
H3-N10-200-6YB	200LB alloy "S" beam imperial	2 lb
H3-N10-250-6YB	250LB alloy "S" beam imperial	2 lb
H3-N10-300-6YB	300LB alloy "S" beam imperial	2 lb
H3-N10-500-6YB	500LB alloy "S" beam imperial	2 lb
H3-N10-750-6YB	750LB alloy "S" beam imperial	2 lb
H3-N10-1K-6YB	1K alloy "S" beam imperial	2 lb
H3-N10-1.5K-6YB	1.5K alloy "S" beam imperial	2 lb
H3-N10-2.0K-6YB	2K alloy "S" beam imperial	2 lb
H3-N10-2.5K-6YB	2.5K alloy "S" beam imperial	2 lb
H3-N10-3K-6YB	3K alloy "S" beam imperial	4 lb
H3-N10-5K-6YB	5K alloy "S" beam imperial	4 lb
H3-N10-10K-6YB	10K alloy "S" beam imperial	4 lb
H3-N10-15K-6YB	15K alloy "S" beam imperial	15 lb
H3-N10-20K-6YB	20K alloy "S" beam imperial	15 lb

Compatible Products	
Manufacturer	Model
Celtron	STC
Sensortronics	60001-0221 Compact
Coti	CISB

7.5t-30t

25kg-5t 0.1-20klb

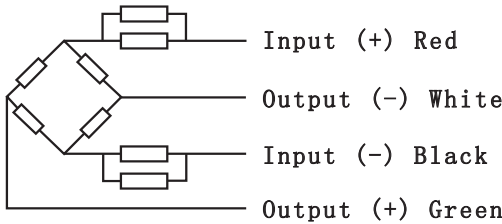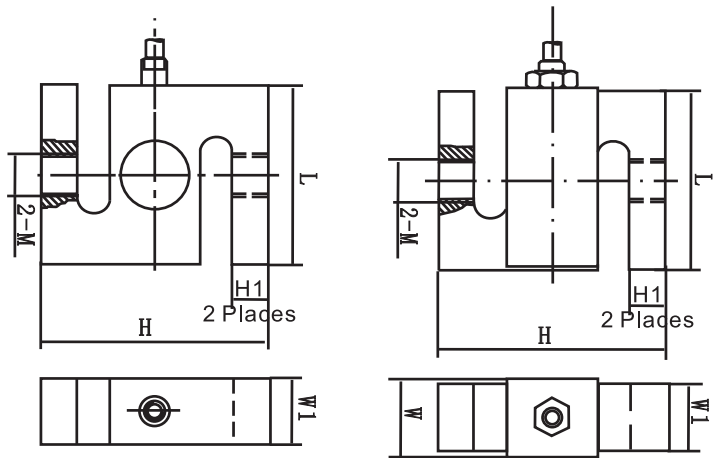

Wiring:
 Shielded 4 conductor cable: Ø5mm
 Standard Cable Length: 3m (0.5t~0.75t),
 6m (1t~30t), (0.1l;b~20klb)



H3F

- H3F load cells are available in the capacities 0.1t~5t and 250lb~20Klb
- Alloy steel, sealed by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments.
- S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas.

Features

- Capacities: 0.1t~5t; 250lb~20Klb
- High accuracy
- Alloy steel construction
- Low profile
- NTEP Cert. No.: CC06-099A1

Accessory

- HL-3-001
- HL-3-002
- HL-3-003
- HL-3-004
- HL-3-005





Specifications			
Capacity	t	100kg/250kg/500kg/750kg/1t/1.5t/2t/2.5t/5t	
	lb	250/500/750/1K/1.5K/2K/2.5K/3K/5K/7.5K/10K/15K/20K	
Accuracy		C3	N5
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Load Cell Verification Intervals	Vmin	Emax/5000	Emax/5000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.017
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.020
Output Sensitivity	(mV/V)	3.0±0.008	
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	351±2.0	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Part Number	Capacity	Ship Weight
H3FC3-100KG-6T	100KG alloy "S" beam metric	2 lb
H3FC3-250KG-6T	250KG alloy "S" beam metric	2 lb
H3FC3-500KG-6T	500KG alloy "S" beam metric	2 lb
H3FC3-750KG-6T	750KG alloy "S" beam metric	2 lb
H3FC3-1.0t-6T	1T alloy "S" beam metric	4 lb
H3FC3-1.5t-6T	1.5T alloy "S" beam metric	4 lb
H3FC3-2.0t-6T	2T alloy "S" beam metric	4 lb
H3FC3-2.5t-6T	2.5T alloy "S" beam metric	4 lb
H3FC3-5.0t-6T	5.0T alloy "S" beam metric	4 lb
H3F-N5-250-6YT	250LB alloy "S" beam imperial	2 lb
H3F-N5-500-6YT	500LB alloy "S" beam imperial	2 lb
H3F-N5-750-6YT	750LB alloy "S" beam imperial	2 lb
H3F-N5-1K-6YT	1K alloy "S" beam imperial	2 lb
H3F-N5-1.5K-6YT	1.5K alloy "S" beam imperial	2 lb
H3F-N5-2K-6YT	2K alloy "S" beam imperial	4 lb
H3F-N5-2.5K-6YT	2.5K alloy "S" beam imperial	4 lb
H3F-N5-3K-6YT	3K alloy "S" beam imperial	4 lb
H3F-N5-5K-6YT	5K alloy "S" beam imperial	4 lb
H3F-N5-7.5K-6YT	7.5K alloy "S" beam imperial	4 lb
H3F-N5-10K-6YT	10K alloy "S" beam imperial	4 lb
H3F-N5-15K-6YT	15K alloy "S" beam imperial	7 lb
H3F-N5-20K-6YT	20K alloy "S" beam imperial	7 lb

Compatible Products	
Manufacturer	Model
Celtron	STC
Sensortronics	60001,60036,RTI363
Cotu	CISB
Transcell	BSS

Outline Dimensions mm (inch)

Dimension (mm)	H	W	W1	L	H1	M
Capacity						
100kg	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	15.8 (0.62)	M10x1.5
250kg	76.2 (3)	25.4 (1.0)	19 (0.75)	20.8 (2)	15.12 (0.6)	M12x1.75
500kg	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	14.2 (0.56)	M12x1.75
750kg	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	13.46 (0.53)	M12x1.75
1000kg	76.2 (3)	31.8 (1.25)	25.4 (1)	50.8 (2)	13.24 (0.52)	M12x1.75
1500kg	76.2 (3)	31.8 (1.25)	25.4 (1)	50.8 (2)	12.1 (0.48)	M12x17.75
2000kg	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	26.7 (1.05)	M18x1.5
2500kg	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	25.48 (1)	M18x1.5
5000kg	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	20.26 (0.8)	M18x1.5
250lb	76.2 (3)	19 (0.75)	12.7 (0.5)	50.8 (2)	15.69 (0.62)	3/8-24UNF-2B
500lb	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	15.25 (0.6)	1/2-20UNF-2B
750lb	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	14.95 (0.59)	1/2-20UNF-2B
1klb	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	14.4 (0.57)	1/2-20UNF-2B
1.5klb	76.2 (3)	25.4 (1.0)	19 (0.75)	50.8 (2)	13.75 (0.54)	1/2-20UNF-2B
2klb	76.2 (3)	31.8 (1.25)	25.4 (1)	50.8 (2)	13.4 (0.53)	1/2-20UNF-2B
2.5klb	76.2 (3)	31.8 (1.25)	25.4 (1)	50.8 (2)	13.03 (0.51)	1/2-20UNF-2B
3klb	76.2 (3)	31.8 (1.25)	25.4 (1)	50.8 (2)	12.39 (0.49)	1/2-20UNF-2b
5klb	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	27.18 (1.07)	3/4-16UNF-2B
7.5klb	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	25.78 (1.01)	3/4-16UNF-2B
10klb	108 (4.25)	31.8 (1.25)	25.4 (1)	76.2 (3)	23.88 (0.94)	3/4-16UNF-2B
15klb	140 (5.51)	31.8 (1.25)	38.1 (1.31)	100 (3.94)	31 (1.22)	1-14UNS-2B
20klb	177.8 (7)	50.8 (2.0)	50.8 (2.0)	125.5 (4.94)	39.9 (1.57)	1 1/4-12UNF-2B

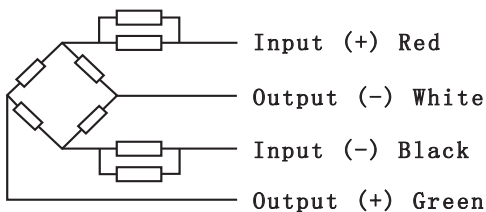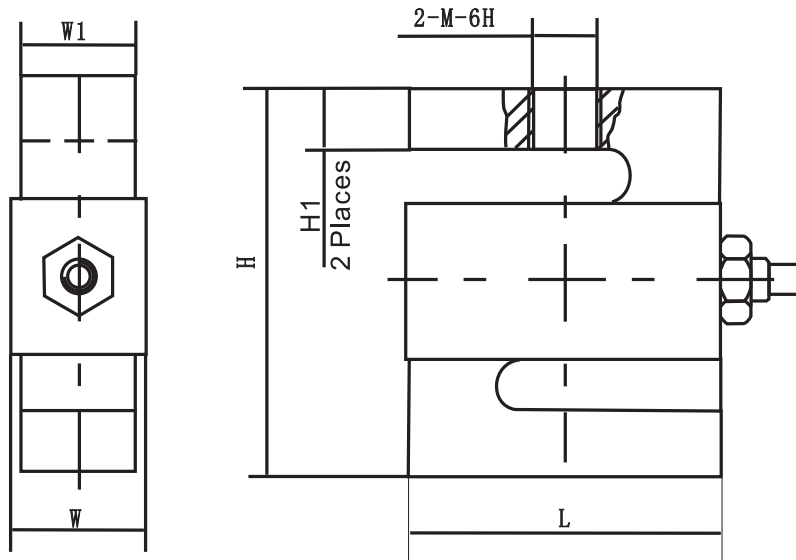

Wiring:

Shielded 4 conductor cable: $\Phi 5\text{mm}$
Standard Cable Length: 6m



H3G

- H3G load cells are available in the capacities 50kg~7.5t and 50lb~10Klb
- Alloy steel, sealed by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- S beam design, tension and/or compression loading possible, easy installation, suitable for crane scale, mechanical conversion scale, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features

- Capacity: 50kg~7.5t; 150lb~10Klb
- High accuracy
- Alloy steel construction
- Low profile
- OIML Cert. No.: R60/2000-NL1-10.30
- NTEP Cert. No.: CC06-099A1

Accessory

- HL-3-001
- HL-3-002
- HL-3-003
- HL-3-004
- HL-3-005





Specifications				
Capacity	t lb	0.05/0.1/0.25/0.5/1/2.5/5/7.5 50/75/100/150/200/250/300/500/750/1K/1.5K/2K/2.5K/3K/5K/10K		
Accuracy		C3	N3	N10
Maximum Number of Verification Intervals	Nmax	3000	3000	10000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000	Emax/3000	Emax/10000
Combined Error	(%FS)	≤±0.020	≤±0.030	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.030	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.020	≤±0.014
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.025	≤±0.017
Output Sensitivity	(mV/V)	3.0±0.008		
Input Resistance	(Ω)	430±60		
Output Resistance	(Ω)	351±2.0		
Insulation Resistance	(MΩ)	≥5000 (50VDC)		
Zero Balance	(%FS)	1.0		
Temperature, Compensated	(°C)	-10~+40		
Temperature, Operating	(°C)	-35~+70		
Excitation, Recommended	(V)	5~12 (DC)		
Excitation, Max	(V)	18 (DC)		
Safe Overload	(%FS)	150		
Ultimate Overload	(%FS)	300		

Outline Dimensions mm (inch)						
Dimension (mm)	L	H	W1	W	M	H1
Capacity						
50kg, 100kg	50.8 (2.0)	63.5 (2.5)	12.7 (0.5)	16.07 (0.63)	M8	10.16 (0.4)
50lb~300lb					1/4-28UNF	
200kg, 500kg					M12	
500lb~1.5Klb	50.8 (2.0)	63.5 (2.5)	19.05 (0.75)	22.43 (0.88)	1/2-20UNF	
1t					M12	15.2 (0.6)
2, 2.5Klb					1/2-20UNF	
2.5t	76.2 (3.0)	101.6 (4.0)	25.4 (1.0)	28.78 (1.13)	M20x1.5	
3Klb					1/2-20UNF	20 (0.79)
5t					M20x1.5	
5Klb, 10Klb	76.2 (3.0)	101.6 (4.0)	25.4 (1.0)	28.78 (1.13)	3/4-16UNF	15.24 (0.6)
7.5t					M24x2	



Part Number	Capacity	Ship Weight
H3G-C3-50KG-6B	50KG alloy steel "S" beams metric	2 lb
H3G-C3-100KG-6B	100KG alloy steel "S" beams metric	2 lb
H3G-C3-250KG-6B	250KG alloy steel "S" beams metric	2 lb
H3G-C3-500KG-6B	500KG alloy steel "S" beams metric	2 lb
H3G-C3-1.0t-6B	1T alloy steel "S" beams metric	2 lb
H3G-C3-2.5t-6B	2.5T alloy steel "S" beams metric	4 lb
H3G-C3-5.0t-6B	5T alloy steel "S" beams metric	4 lb
H3G-C3-7.5t-6B	7.5T alloy steel "S" beams metric	7 lb
H3G-N3-50-6YB	50LB alloy steel "S" beams imperial	2 lb
H3G-N3-75-6YB	75LB alloy steel "S" beams imperial	2 lb
H3G-N3-15K-6YB	15K alloy steel "S" beams imperial	7 lb
H3G-N3-20K-6YB	20K alloy steel "S" beams imperial	18 lb
H3G-N10-100-6YB	100LB alloy steel "S" beams imperial	2 lb
H3G-N10-150-6YB	150LB alloy steel "S" beams imperial	2 lb
H3G-N10-200-6YB	200LB alloy steel "S" beams imperial	2 lb
H3G-N10-250-6YB	250LB alloy steel "S" beams imperial	2 lb
H3G-N10-300-6YB	300LB alloy steel "S" beams imperial	2 lb
H3G-N10-500-6YB	500LB alloy steel "S" beams imperial	2 lb
H3G-N10-750-6YB	750LB alloy steel "S" beams imperial	2 lb
H3G-N10-1K-6YB	1K alloy steel "S" beams imperial	2 lb
H3G-N10-1.5K-6Y	1.5K alloy steel "S" beams imperial	2 lb
H3G-N10-2K-6YB	2K alloy steel "S" beams imperial	2 lb
H3G-N10-2.5K-6Y	2.5K alloy steel "S" beams imperial	2 lb
H3G-N10-3K-6YB	3K alloy steel "S" beams imperial	4 lb
H3G-N10-5K-6YB	5K alloy steel "S" beams imperial	4 lb
H3G-N10-10K-6YB	10K alloy steel "S" beams imperial	4 lb

Compatible Products	
Manufacturer	Model
Revere	M363
Celtron	STC
Sensortronics	60001
Artech	20210
Rice Lake	RL20000/20001
Totalcomp	TS-SS
Transcell	BSA/BSS
Vishay	STC

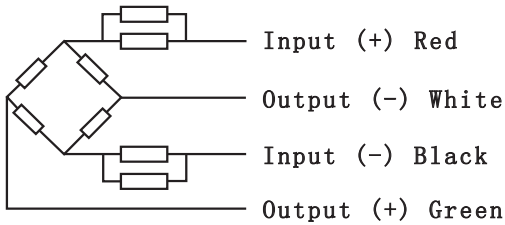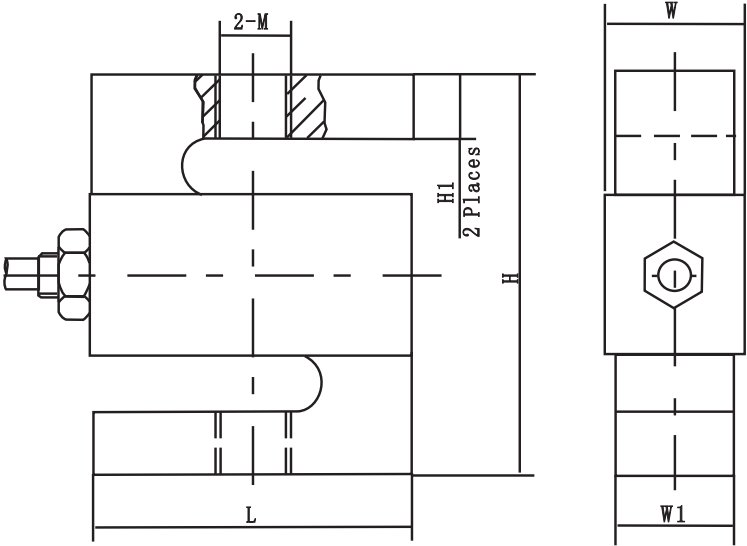

Wiring:
 Shielded 4 conductor cable: Ø5mm
 Standard Cable Length: 6m



B8D

- B8D load cells are available in the capacities 0.25Klb~20Klb; 0.5t~5t
- Stainless steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Single shear beam, easy for installation, suitable for electronic truck scales, automobile testing facilities, hopper scales and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas



Features

- Capacities: 0.25Klb~20Klb; 0.5t~5t
- High accuracy
- Stainless steel construction
- Low profile
- OIML Cert. No.: R60/2000-NL1-11.28
- NTEP Cert. No.: CC12-022

Accessories



- BJ-8-202
- BJ-8-205
- BJ-8-219
- BJ-8-220
- BY-8-104

Specifications			
Capacity	t	0.5/1/2/5	
	Klb	0.25/0.5/0.75/1/1.5/2/2.5/3/4/5/5KSE/7.5/10/15/20	
Accuracy		C3	N5
Approvals		OIML R60 C3	
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Number of Verification Intervals	Vmin	Emax/10000	Emax/5000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.017
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.020
Output Sensitivity	(mV/V)	3.0±0.008	
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	350±3.5	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Part Number	Capacity	Ship Weight
B8D-C3-500KG-6B	500KG stainless shear beam metric	2 lb
B8D-C3-1.0t-6B	1T stainless shear beam metric	2 lb
B8D-C3-2.0t-6B	2T stainless shear beam metric	2 lb
B8D-C3-5.0t-6B	5T stainless shear beam metric	9 lb
B8D-N5-250-6YB	250LB stainless shear beam imperial	2 lb
B8D-N5-500-6YB	500LB stainless shear beam imperial	2 lb
B8D-N5-750-6YB	750LB stainless shear beam imperial	2 lb
B8D-N5-1K-6YB	1K stainless shear beam imperial	2 lb
B8D-N5-1.5K-6YB	1.5K stainless shear beam imperial	2 lb
B8D-N5-2K-6YB	2K stainless shear beam imperial	2 lb
B8D-N5-2.5K-6YB	2.5K stainless shear beam imperial	2 lb
B8D-N5-3K-6YB	3K stainless shear beam imperial	2 lb
B8D-N5-4K-6YB	4K stainless shear beam imperial	2 lb
B8D-N5-5KSE-6YB	5K SE stainless shear beam imperial	2 lb
B8D-N5-5K-6YB	5K LE stainless shear beam imperial	4 lb
B8D-N5-7.5K-6YB	7.5K stainless shear beam imperial	4 lb
B8D-N5-10K-6YB	10K stainless shear beam imperial	4 lb
B8D-N5-15K-6YB	15K stainless shear beam imperial	4 lb
B8D-N5-20K-6YB	20K stainless shear beam imperial	9 lb

Compatible Products	
Manufacturer	Model
Revere	M9123
Tedea	3410
Celtron	SQB
Sensortronics	65023

Outline Dimensions mm (inch)											
Dimension	L	L1	L2	L3	d	H	W	D	H1	M	
Capacity											
0.25Klb, 0.5Klb, 0.75Klb, 1Klb	130 (5.12)	15.7 (0.62)	25.4 (1.0)	76.2 (3.0)	13.46 (0.52)	30.2 (1.19)	30.7 (1.20)	13.4 (0.53)	16 (0.63)	M12-6H	1/2-20UNF-2B
0.5t, 1t, 2t, 2.5Klb, 3Klb, 4Klb, 5KSE	130 (5.12)	15.7 (0.62)	25.4 (1.0)	76.2 (3.0)	13.4 (0.53)	31.32 (1.23)	31.32 (1.23)	13.4 (0.53)	15.75 (0.62)	M12-6H	1/2-20UNF-2B
3t, 5t 5Klb, 7.5Klb, 10Klb, 15Klb	171 (6.73)	19 (0.75)	38.1 (1.5)	95.2 (3.75)	20.65 (19.81)	36.8 (1.45)	36.8 (1.45)	20.65 (19.81)	17.78 (0.7)	M20x25-6H	3/4-16UNF-2B
20Klb	222.25 (8.75)	25.4 (1.0)	50.8 (2.0)	120.7 (4.75)	26.9 (1.06)	49.5 (1.95)	49.5 (1.95)	27.56 (1.08)	24.78 (0.97)	M24x2-6H	1-12UNF-2B

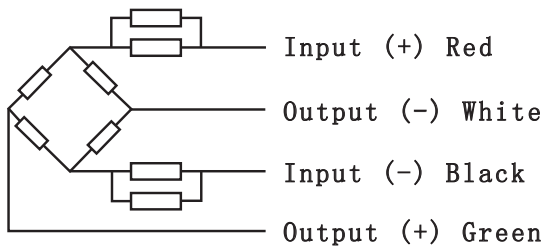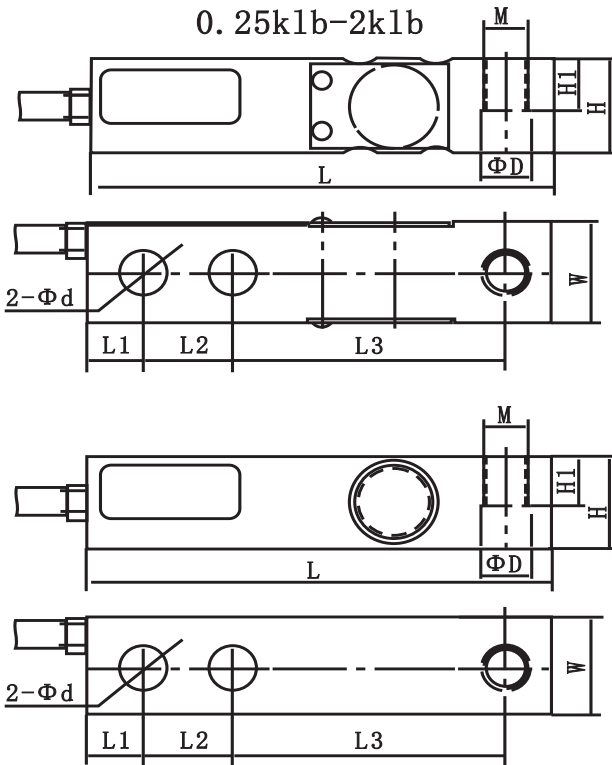

Wiring:
 Shielded 4 conductor cable: $\phi 5\text{mm}$
 Standard Cable Length: 6m



BM8D

- BM8D load cells are available in the capacities 1Klb~20Klb; 0.5t~10t
- Stainless steel construction, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Single shear beam, easy for installation, suitable for electronic platform scales, electronic truck scales and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features

- Capacities: 1Klb~20Klb; 0.5t~10t
- High accuracy
- Stainless steel construction
- Low profile
- OIML Cert. No.: R60/2000-NL1-12.11
- NTEP Cert. No.: 10-056A2

Accessories

- BJ-8-215
- BJ-8-219
- BJ-8-220
- HJ-8-213



Specifications			
Capacity	t	0.5/1/2/2.5/3/5/7.5/10	
	Klb	1/1.5/2/2.5/5/5KSE/7.5/10/15/20	
Accuracy		C3	N5
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Number of Verification Intervals	Vmin	Emax/10000	Emax/5000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.017
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.04	3.0±0.008
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	350±3.5	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	



Part Number	Capacity	Ship Weight
BM8D-N5-0.5t	500KG stainless shear beam	2 lb
BM8D-N5-1t	1T stainless shear beam	2 lb
BM8D-N5-2t	2T stainless shear beam	2 lb
BM8D-N5-2.5t	2.5T stainless shear beam	4 lb
BM8D-N5-3.t	3T stainless shear beam	4 lb
BM8D-N5-5t	5T stainless shear beam	4 lb
BM8D-N5-7.5t	7.5T stainless shear beam	9 lb
BM8D-N5-10t	10T stainless shear beam	9 lb
BM8D-N5-1K	1K stainless shear beam	2 lb
BM8D-N5-1.5K	1.5K stainless shear beam	2 lb
BM8D-N5-2K	2K stainless shear beam	2 lb
BM8D-N5-2.5K	2.5K stainless shear beam	2 lb
BM8D-N5-2.5KLE	2.5K LE stainless shear beam	4 lb
BM8D-N5-5KSE	5K SE stainless shear beam	2 lb
BM8D-N5-7.5K	7.5K stainless shear beam	4 lb
BM8D-N5-10K	10K stainless shear beam	4 lb
BM8D-N5-15K	15K stainless shear beam	9 lb
BM8D-N5-20K	20K stainless shear beam	9 lb

Compatible Products

Manufacturer	Model
HBM	H35



Outline Dimensions mm (inch)										
Dimension (mm)	W	D	H	h	L	L1	L3	L3	L4	M
Capacity										
1Klb	30.7	13.5	30.2	24.76 (0.98)	130 (5.12)	15.7 (0.62)	25.4 (1)	101.6 (4)	57.1 (2.25)	1/2-20UNF-2B
1.5Klb, 2Klb	(1.21)	(0.53)	(1.89)	26 (1.024)						
2.5Klb				27 (1.06)						
3Klb~5KlbSE				27.95 (1.10)						
0.5t	31.3 (1.23)	13.5 (0.53)	31.3 (1.23)	24.76 (0.98)						M12x1.75
1t				26 (1.024)						
1.5t~2t				27.95 (1.10)						
5Klb~15Klb				27 (1.06)	171.5 (6.75)	19.1 (0.748)	38.1 (1.5)	133.3 (5.25)	76.2 (3)	3/4-16UNF-2B
2.5t~5t	36.8 (1.45)	19.8 (0.779) 20.5 (0.81)	36.8 (1.45)	31.95 (1.26)						M20x2.5
20Klb	49.5 (1.95)	26.9 (1.06)	49.5 (1.95)	40 (1.57)	222.2 (8.75)	25.4 (1)	50.8 (2)	171.5 (6.75)	101.6 (4)	1-12UNF-2B
7.5t~10t										M24x2

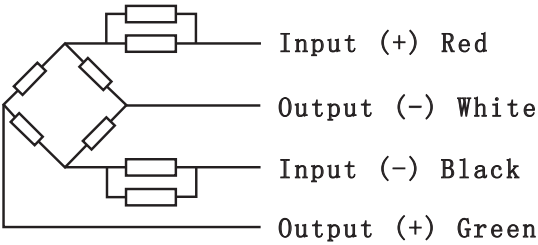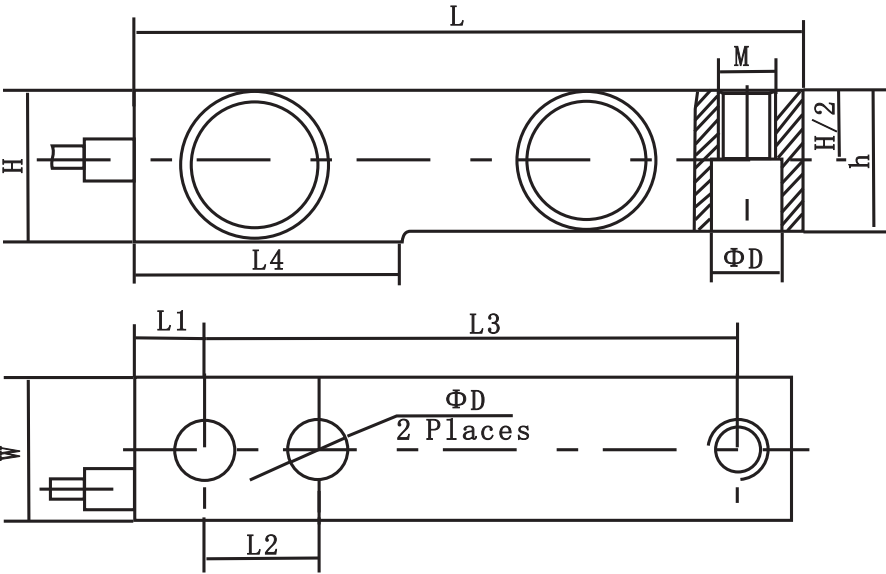

Wiring:
 Shielded 4 conductor cable
 Standard Cable Length: 6m



BM8H

- BM8H load cells are available in the capacities 1k~10Klb; 0.5t~5t
- Stainless steel construction, hermetically welded, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Single shear beam, easy for installation, suitable for electronic truck scales, track scales, hopper scales and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features


- Capacities: 1K~10Klb; 0.5t~5t
- High accuracy
- Stainless steel construction
- Low profile
- OIML Cert. No.: R60/2000-NL1-13.20
- NTEP Cert. No.: CC10-056A2



Weighing Modules

- BM-8-406

Specifications			
Capacity	t	0.5/1/2/5	
	Klb	1/2.5/4/5/10	
Accuracy		C3	N5
Approvals		OIML R60 C3	
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000	Emax/5000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.017
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.002	
Input Resistance	(Ω)	1000±10	
Output Resistance	(Ω)	1000±10	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

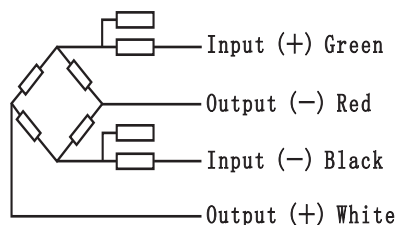

Wiring:


Shielded 4 conductor cable: $\Phi 5 \pm 0.2\text{mm}$; $\Phi 5$
Standard Cable Length: 3m (250Kg-1t), 6m (2t-5t)

Compatible Products

Manufacturer	Model
Revere	ACB
HBM	HLC
Celtron	HVC
Sensortronics	65084

Outline Dimensions mm (inch)												
Dimension	L	L1	L2	L3	L4	H	H1	H2	W	D	d	M
Capacity (t)												
500kg (1Klb)	130.0 (5.12)	57.1 (2.25)	15.5 (0.62)	25.4 (1.0)	76.2 (3.0)	31.8 (1.24)	26.0 (1.02)	14.2 (0.55)	31.8 (1.23)	20.5 (0.81)	13 (0.51)	M 1/2-20UNF
1.0t (2Klb, 2.5Klb)	130.0 (5.12)	57.1 (2.25)	15.5 (0.62)	25.4 (1.0)	76.2 (3.0)	31.8 (1.24)	27.95 (1.1)	14.2 (0.55)	31.8 (1.23)	20.5 (0.81)	13 (0.51)	M12 1/2-20UNF
1.5t, 2.0t (4Klb, 5Klb)	130.0 (5.12)	57.1 (2.25)	15.5 (0.62)	25.4 (1.0)	76.2 (3.0)	35.9 (1.41)	31.95 (1.26)	14.2 (0.55)	31.8 (1.23)	20.5 (0.81)	13 (0.51)	M12 1/2-20UNF
5.0t (10Klb)	172 (6.77)	76.2 (3.0)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	44 (1.72)	40.0 (1.57)	20 (0.78)	38 (1.48)	30.2 (1.19)	20.5 (0.8)	M20 3/4-20UNF
2.5t, 3t	172 (6.77)	76.2 (3.0)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	44 (1.72)	36 (1.42)	20 (0.78)	38 (1.48)	30.2 (1.19)	20.5 (0.8)	M20

Part Number	Capacity	Ship Weight
BM8H-C3-0.5t	500KG stainless shear beam metric	2 lb
BM8H-C3-1.0t	1T stainless shear beam metric	2 lb
BM8H-C3-2.0t	2T stainless shear beam metric	2 lb
BM8H-C3-5.0t	5T stainless shear beam metric	4 lb
BM8H-N5-1K	1K stainless shear beam imperial	2 lb
BM8H-N5-2.5K	2.5K stainless shear beam imperial	2 lb
BM8H-N5-4K	4K stainless shear beam imperial	2 lb
BM8H-N5-5K	5K stainless shear beam imperial	2 lb
BM8H-N5-10K	10K stainless shear beam imperial	4 lb

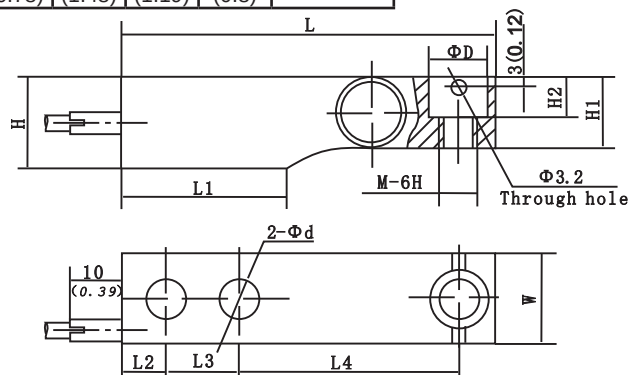



BM11

- BM11 load cells are available in the capacities 20kg~500kg
- Stainless steel construction, welded with bellow, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments.
- Single point with bellow, easy installation, suitable for crane scales, mechanical conversion scales, hopper scales and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features


- Capacities: 20kg~500kg
- High accuracy
- Stainless steel construction
- Low profile
- OIML Cert. No.: R60/2000-N1-11.20
- NTEP Cert. No.: CC07-020A1

Accessories & Weighing Modules


- BM-11-401
- BM-11-402

Specifications		
Capacity	kg	20/30/50/100/200/350/500
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Intervals	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.02
Input Resistance	(Ω)	460±50
Output Resistance	(Ω)	351±2.0
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.0
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

Outline Dimension mm (inch)

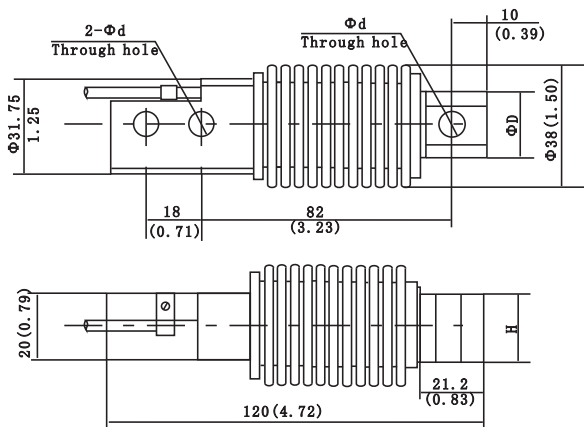

Outline Dimensions mm (inch)			
Dimension	d	D	H
Capacity (kg)			
20,30,,50,100,200	8.2 (0.32)	23 (0.91)	20 (0.79)
250,350, 500	10.3 (0.41)	24 (0.94)	19 (0.75)

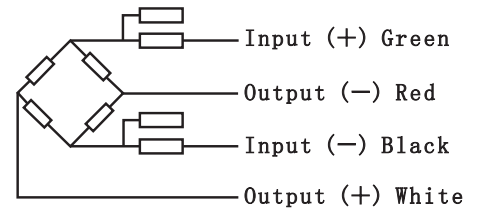

Wiring:

Shielded 4 conductor cable
Standard Length: 3m
Cable Diameter: $\phi 5 \pm 0.2\text{mm}$

Part Number	Capacity	Ship Weight
BM11-C3-20KG	20KG stainless single point with bellows	2 lb
BM11-C3-30KG	30KG stainless single point with bellows	2 lb
BM11-C3-50KG	50KG stainless single point with bellows	2 lb
BM11-C3-0.1t	100KG stainless single point with bellows	2 lb
BM11-C3-0.2t	200KG stainless single point with bellows	2 lb
BM11-C3-350KG	350KG stainless single point with bellows	2 lb
BM11-C3-0.5t	500KG stainless single point with bellows	2 lb

Compatible Products	
Manufacturer	Model
Revere	SHB
HBM	Z6
Tedea	355
Celtron	HBB
Rice Lake	RLHBB
Vishay	HBB



H8C

- H8C load cells are available in the capacities 1Klb~20Klb; 0.5t~10t
- Alloy steel, sealed by adhesive inside, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- Single shear beam, easy for installation.
- Suitable for electronic platform scales, hopper scales, and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas



Features

- Capacities: 1Klb~20Klb; 0.5t~10t
- High accuracy
- Alloy steel construction
- Low profile
- OIML Cert. No.: R60/2000-NL1-12.12
- NTEP Cert. No.: CC12-028

Accessories & Weighing Modules

- HD-8-301
- HJ-8-201
- HJ-8-203
- HJ-8-213
- HY-8-102
- HM-8-402


Specifications			
Capacity	t	0.5/1/1.5/2/2.5/3/5/10	
	Klb	1/1.5/2/2.5/3/4/5/5KSE/7.5/10/20	
Accuracy		C3	N5
Approvals		OIML R60 C3	
Maximum Number of Verification Intervals	Nmax	3000	5000
Minimum Number of Verification Intervals	Vmin	E _{max} /10000	E _{max} /5000
Combined Error	(%FS)	≤±0.020	≤±0.020
Creep	(%FS/30min)	≤±0.016	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011	≤±0.017
Temperature Effect on Zero	(%FS/10°C)	≤±0.015	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.002	3.0±0.003
Input Resistance	(Ω)	350±3.5	
Output Resistance	(Ω)	350±3.5	
Insulation Resistance	(MΩ)	≥5000 (50VDC)	
Zero Balance	(%FS)	1.0	
Temperature, Compensated	(°C)	-10~+40	
Temperature, Operating	(°C)	-35~+70	
Excitation, Recommended	(V)	5~12 (DC)	
Excitation, Max	(V)	18 (DC)	
Safe Overload	(%FS)	150	
Ultimate Overload	(%FS)	300	

Part Number	Capacity	Ship Weight
H8C-C3-500KG-4B	500KG alloy shear beam metric	2 lb
H8C-C3-1.0t-4B	1T alloy shear beam metric	2 lb
H8C-C3-1.5t-4B	1.5T alloy shear beam metric	2 lb
H8C-C3-2.0t-4B	2T alloy shear beam metric	2 lb
H8C-C3-2.5T-4B	2.5T alloy shear beam metric	2 lb
H8C-C3-3.0t-4B	3T alloy shear beam metric	2 lb
H8C-C3-5.0t-4B	5T alloy shear beam metric	2 lb
H8C-C3-10t-4B	10T alloy shear beam metric	2 lb
H8C-N5-500-6YB	500K alloy shear beam imperial	2 lb
H8C-N5-1.0K-6YB	1K alloy shear beam imperial	2 lb
H8C-N5-1.5K-6YB	1.5K alloy shear beam imperial	2 lb
H8C-N5-2.0K-6YB	2K alloy shear beam imperial	2 lb
H8C-N5-2.5K-6YB	2.5K alloy shear beam imperial	2 lb
H8C-N5-3.0K-6YB	3K alloy shear beam imperial	2 lb
H8C-N5-4.0K-6YB	4K alloy shear beam imperial	2 lb
H8C-N5-5KSE-6YB	5K SE alloy shear beam imperial	2 lb
H8C-N5-5.0K-6YB	5K LE alloy shear beam imperial	2 lb
H8C-N5-7.5K-6YB	7.5K alloy shear beam imperial	2 lb
H8C-N5-10K-6YB	10K alloy shear beam imperial	2 lb
H8C-N5-15K-6YB	15K alloy shear beam imperial	9 lb
H8C-N5-20K-6YB	20K alloy shear beam imperial	9 lb



Compatible Products	
Manufacturer	Model
Revere	5123
HBM	B35
Tedea	3420/3421
Celtron	SQB
Sensortronics	65023
Coti	CI-23
Artech	30310
Rice Lake	RL35023/39123
Totalcomp	TSB
Transcell	SBS

Outline Dimensions mm (inch)												
Dimension	L	L1	L2	L3	L4	H	H1	W	W1	D	d	M
Capacity												
0.5~2t	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	54.2 (2.13)	31.8 (1.25)	15.8 (0.62)	31.8 (1.25)	34 (1.34)	13.5 (0.53)	13.5 (0.53)	M12X1.75
1K~4K	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	54.2 (2.13)	31.8 (1.25)	15.8 (0.62)	31.8 (1.25)	34 (1.34)	13.5 (0.53)	13.5 (0.53)	1/2-20UNF
5KSE	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	54.2 (2.13)	31.8 (1.25)	15.8 (0.62)	31.8 (1.25)	34 (1.34)	13.5 (0.53)	13.5 (0.53)	1/2-20UNF
2.5t~5t	171.5 (6.75)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	77.2 (3.04)	38.1 (1.5)	18.8 (0.74)	38.1 (1.5)	40 (1.57)	19.8 (0.78)	19.8 (0.78)	M18x1.5
5K~10K	171.5 (6.75)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	77.2 (3.04)	38.1 (1.5)	18.8 (0.74)	38.1 (1.5)	40 (1.57)	19.8 (0.78)	19.8 (0.78)	3/4-16UNF
10t	222.3 (8.75)	25.4 (1.0)	50.8 (2.0)	120.7 (4.75)	101.6 (4)	50.8 (2.0)	25.4 (1.0)	50.8 (2)	52.4 (2.06)	26.92 (1.06)	26 (1.02)	M24x2
20K	222.3 (8.75)	25.4 (1.0)	50.8 (2.0)	120.7 (4.75)	101.6 (4)	50.8 (2.0)	25.4 (1.0)	50.8 (2)	52.4 (2.06)	26.92 (1.06)	26 (1.02)	1-12UNF

H8C-XXX-XXX-XW

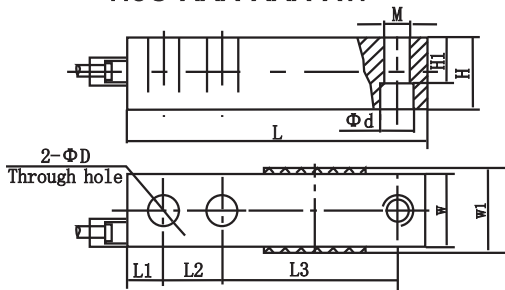

H8C-XXX-XXX-XB

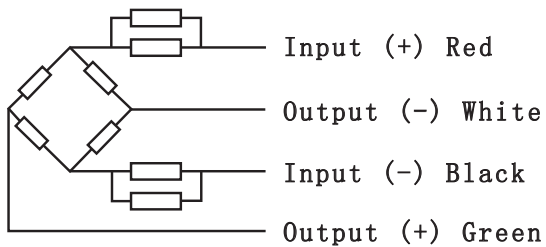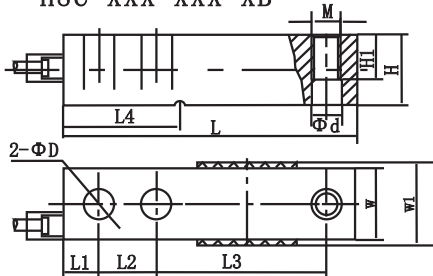

Wiring:

Shielded 4 conductor cable: $\phi 5\text{mm}$

Standard Cable Length: 4m (0.5t~2t); 6m (2.5t~10t, 1Klb~20Klb)

Note: This product has the stress groove, is not suitable for Australian market. For Australian users please choose H8C-XX-XX-XW.



HM8

- HM8 load cells are available in the capacities 500kg~30t
- Alloy steel, hermetically welded, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- Single shear beam, easy for installation, suitable for electronic truck scales, track scales, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features

- Capacities: 500kg~50t
- Alloy steel construction
- OIML Cert. No.: R60/2000-NL1-12.14
- High accuracy
- Low profile

Accessories & Weighing Modules



- HY-8-101
- HM-8-401



Specifications		
Capacity	t	500kg/1/2/2.5/3/5/10/15/20/25/30
Accuracy		C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.002
Input Resistance	(Ω)	350±3.5
Output Resistance	(Ω)	352±3.0
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

Part Number	Capacity	Ship Weight
HM8-C3-500KG	500KG stainless shear beam	11 lb
HM8-C3-1.0t	1T stainless shear beam	11 lb
HM8-C3-2.0t	2T stainless shear beam	13 lb
HM8-C3-2.5t	2.5T stainless shear beam	13 lb
HM8-C3-3.0t	3T stainless shear beam	20 lb
HM8-C3-5.0t	5T stainless shear beam	20 lb
HM8-C3-10t	10T stainless shear beam	42 lb
HM8-C3-15t	15T stainless shear beam	42 lb
HM8-C3-20t	20T stainless shear beam	42 lb
HM8-C3-25t	25T stainless shear beam	42 lb
HM8-C3-30t	30T stainless shear beam	57 lb

Outline Dimensions mm (inch)														
Dimension	H	H1	H2	H3	ΦD	Φd	W	L	L1	L2	L3	L4	L5	L6
Capacity														
1-2t	57.9 (2.28)	43 (1.69)	37 (1.47)	5 (0.2)	35 (1.38)	13 (0.51)	37 (1.47)	203 (7.99)	95 (3.74)	22 (0.87)	98 (3.86)	64 (2.52)	-	-
2.5t	57.9 (2.28)	43 (1.69)	37 (1.47)	5 (0.2)	35 (1.38)	15 (0.59)	37 (1.47)	203 (7.99)	95 (3.74)	22 (0.87)	98 (3.86)	64 (2.52)	-	-
3t	62.9 (2.48)	43 (1.69)	37 (1.47)	5 (0.2)	35 (1.38)	15 (0.59)	37 (1.47)	203 (7.99)	95 (3.74)	22 (0.87)	98 (3.86)	64 (2.52)	-	-
5t	78.7 (3.1)	52 (2.05)	48 (1.89)	8 (0.31)	42 (1.65)	21 (0.83)	48 (1.89)	235 (9.25)	110 (4.33)	22 (0.87)	124 (4.88)	66 (2.6)	-	-
10t, 15t	127.7 (5.03)	67 (2.64)	60 (2.36)	12 (0.47)	57 (2.24)	28 (1.10)	60 (2.36)	279 (10.98)	133 (5.24)	32 (1.26)	140 (5.51)	82 (3.32)	-	-
20t, 25t	143.5 (5.65)	82.5 (3.25)	70 (2.76)	12 (0.47)	70 (2.76)	34 (1.34)	70 (2.76)	318 (12.52)	153 (6.02)	38 (1.5)	159 (6.26)	89 (3.5)	-	-
30t	174 (6.85)	115 (4.53)	90 (3.54)	18 (0.71)	70 (2.76)	26 (1.02)	96 (3.78)	374 (14.72)	189 (7.44)	44.5 (1.75)	181 (7.13)	76 (2.99)	51 (2.01)	46 (1.81)

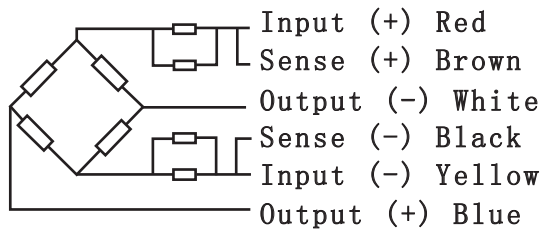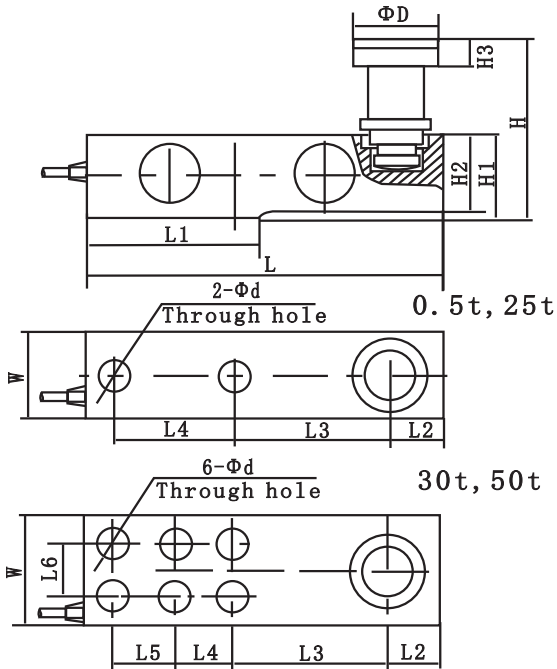

Wiring:
 Shielded 6 conductor cable: $\phi 6.2\text{mm}$
 Standard Cable Length: 6m



HM8C

- HM8C load cells are available in the capacities 0.5~10t
- Alloy steel, hermetically welded, oil-proof, waterproof and anti-corrosion, suitable for all kinds of environments
- Single shear beam, easy for installation, suitable for electronic platform scales, hopper scale and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas

Features


- Capacities: 0.5t~10t
- High accuracy
- Alloy steel construction
- Low profile

Accessories & Weighing Modules

- HJ-8-201
- HJ-8-203
- HJ-8-213
- HD-8-301
- HM-8-402
- HY-8-102



Specifications		
Capacity	t	0.5/1/1.5/2/3/5/10
Accuracy		C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Intervals	Vmin	E _{max} /10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.004
Input Resistance	(Ω)	350±3.5
Output Resistance	(Ω)	351±2.0
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

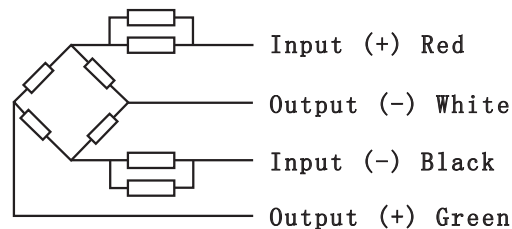


Wiring:

Shielded 4 conductor cable: Φ5mm
Standard Cable Length: 4m (0.5t~2t); 6m (2.5t~10t)

Outline Dimensions mm (inch)												
Dimension	L	L1	L2	L3	L4	H	H1	H2	W	D	d	M
Capacity (t)												
0.5	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	53.7 (2.11)	31.8 (1.25)	15.8 (0.62)	26 (1.02)	31.8 (1.25)	13.5 (0.53)	13.5 (0.53)	M12
1.0	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	53.7 (2.11)	31.8 (1.25)	15.8 (0.62)	28 (1.1)	31.8 (1.25)	13.5 (0.53)	13.5 (0.53)	M12
1.5~2	130 (5.12)	15.8 (0.62)	25.4 (1.0)	76.2 (3.0)	54.2 (2.13)	31.8 (1.25)	15.8 (0.62)	-	31.8 (1.25)	13.5 (0.53)	13.5 (0.53)	M12
2.5	171.5 (6.75)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	76.2 (3.0)	38.1 (1.5)	18.8 (0.74)	34 (1.34)	38.1 (1.5)	19.8 (0.78)	19.8 (0.78)	M18x1.5
3~5	171.5 (6.75)	19.1 (0.75)	38.1 (1.5)	95.3 (3.75)	77.2 (3.04)	38.1 (1.5)	18.8 (0.74)	-	38.1 (1.5)	19.8 (0.78)	19.8 (0.78)	M18x1.5

Part Number	Capacity	Ship Weight
HM8C-C3-0.5t-4B	0.5T alloy shear beam	2 lb
HM8C-C3-1.0t-4B	1T alloy shear beam	2 lb
HM8C-C3-1.5t-4B	1.5T alloy shear beam	2 lb
HM8C-C3-2.0t-4B	2T alloy shear beam	2 lb
HM8C-C3-3.0t-6B	3T alloy shear beam	2 lb
HM8C-C3-5.0t-6B	5T alloy shear beam	2 lb
HM8C-C3-10t-6B	10T alloy shear beam	2 lb

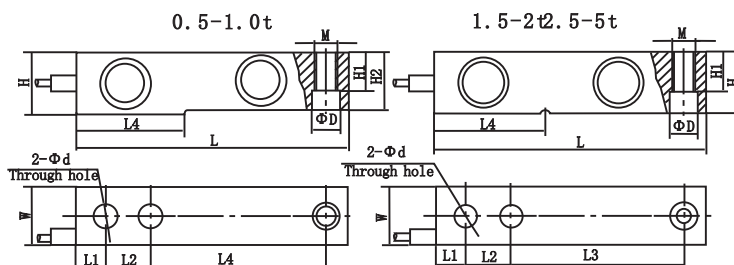



BM6A


- BM6A load cells are available in the capacities 6kg~60kg
- 17-4PH stainless steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium making it suitable for all kinds of environments
- Single point with parallel beam, suitable for electronic scales, platform scales, belt scales, packaging scales and other electronic weighing devices
- Recommended platform size: 300mm x 300mm

Features


- Capacities: 6kg~60kg
- Stainless steel construction
- OIML Cert. No.: R60/20000-NL1-10.32
- High accuracy
- Low profile and easy installation



Specifications		
Capacity	kg	6/12/30/60
Accuracy		C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Interval	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.2/2.0±0.002/3.0±0.2
Input Resistance	(Ω)	400±20
Output Resistance	(Ω)	351±2.0
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300
Corner Correction		0.02% load value/100mm

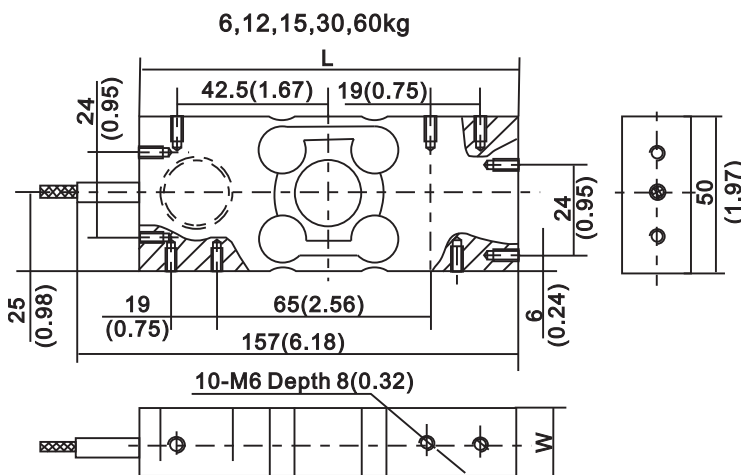

Outline Dimensions mm (inch)			
Dimension	L	H	W
Capacity			
6, 12, 15, 30kg	130 (5.12)	50 (1.96)	18.5 (0.73)
60kg	130 (5.12)	50 (1.96)	23.5 (0.92)

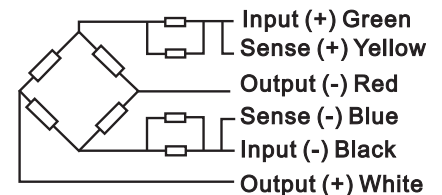

Wiring:

Standard length for 6 conductor cable: 6m
Cable Diameter: Φ5±0.2mm

Part Number	Capacity	Ship Weight
BM6A-C3-6KG	6KG stainless steel single point metric	4 lb
BM6A-C3-12KG	12KG stainless steel single point metric	4 lb
BM6A-C3-30KG	30KG stainless steel single point metric	4 lb
BM6A-C3-60KG	60KG stainless steel single point metric	4 lb

Compatible Products	
Manufacturer	Model
Sensortronics	60064



BM6G




- BM6G load cells are available in the capacities 200kg~500kg
- 17-4PH stainless steel construction, potted by adhesive inside, oil proof, waterproof, anti-corrosive gas and medium sized making it suitable for all kinds of environments
- Single point with parallel beam, suitable for electronic scales, platform scales, belt scales and other electronic weighing devices
- Safe and anti-explosive product, can be used in atrocious environments and hazardous areas
- Recommended platform size: 800mm x 800mm

Features

- Capacities: 200kg~500kg
- Stainless steel construction
- OIML Cert. No.: R60/20000-NL1-11.29
- NTEP Cert. No.: 12-017
- High accuracy
- Low profile and easy installation
- IP68/69K



Specifications		
Capacity	kg	200/300/400/500
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Interval	Vmin	Emax/10000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.016
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.011
Temperature Effect on Zero	(%FS/10°C)	≤±0.015
Output Sensitivity	(mV/V)	2.0±0.2/2.0±0.002
Input Resistance	(Ω)	350±3.5
Output Resistance	(Ω)	350±3.5
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300
Corner Correction		0.02% load value/100mm

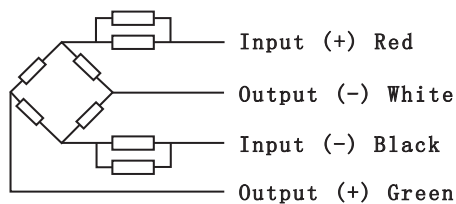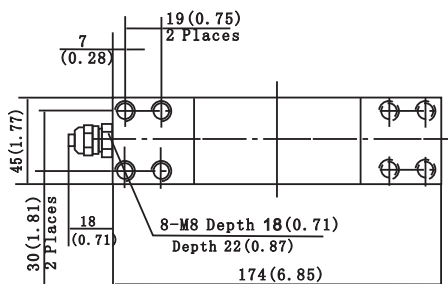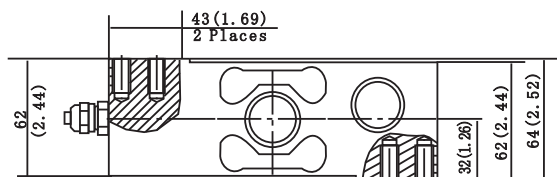

Wiring:

Shielded 4 conductor cable: Φ5mm
Standard Cable Length: 3m

Part Number	Capacity	Ship Weight
BM6G-C3-0.2t	200KG stainless single point metric	7 lb
BM6G-C3-0.3t	300KG stainless single point metric	7 lb
BM6G-C3-0.4t	400KG stainless single point metric	7 lb
BM6G-C3-0.5t	500KG stainless single point metric	7 lb



Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



L6D

- L6D load cells are available in the capacities 2.5kg~50kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for pricing scale, platform scale and other electronic weighing devices





Features

- Capacities: 2.5kg~50kg
- Max. platform size: 250mm x 350mm
- High accuracy
- OIML Cert. No.: R60/2000-NL1-12.52
- NTEP Cert. No.: CC11-012

Specifications		
Capacity	kg	2.5/3/5/6/8/10/15/20/30/35/40/50
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6/1065±15
Output Resistance	(Ω)	350±3/1000±10
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

Part Number	Capacity	Ship Weight
L6D-C3-2.5KG	2.5KG aluminum single point metric	4 lb
L6D-C3-3KG	3KG aluminum single point metric	4 lb
L6D-C3-5KG	5KG aluminum single point metric	4 lb
L6D-C3-6KG	6KG aluminum single point metric	4 lb
L6D-C3-8KG	8KG aluminum single point metric	4 lb
L6D-C3-10KG	10KG aluminum single point metric	4 lb
L6D-C3-15KG	15KG aluminum single point metric	4 lb
L6D-C3-20KG	20KG aluminum single point metric	4 lb
L6D-C3-30KG	30KG aluminum single point metric	4 lb
L6D-C3-35KG	35KG aluminum single point metric	4 lb
L6D-C3-40KG	40KG aluminum single point metric	4 lb
L6D-C3-50KG	50KG aluminum single point metric	4 lb


Compatible Products	
Manufacturer	Model
Revere	640
HBM	PW6-2
Tedea	1022
Celtron	LPS 60kg~35kg
Coti	CI-22
Artech	61022
Rice Lake	RL 1521
BLH	C2G1
Fairbanks	4900
NMB	C2C1
Vishay	C2G1/LPS

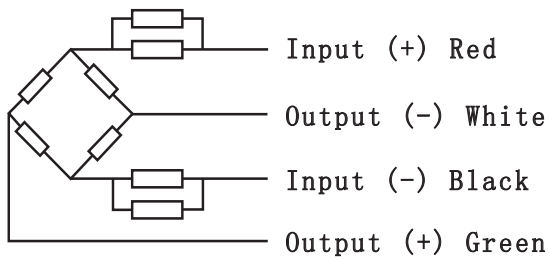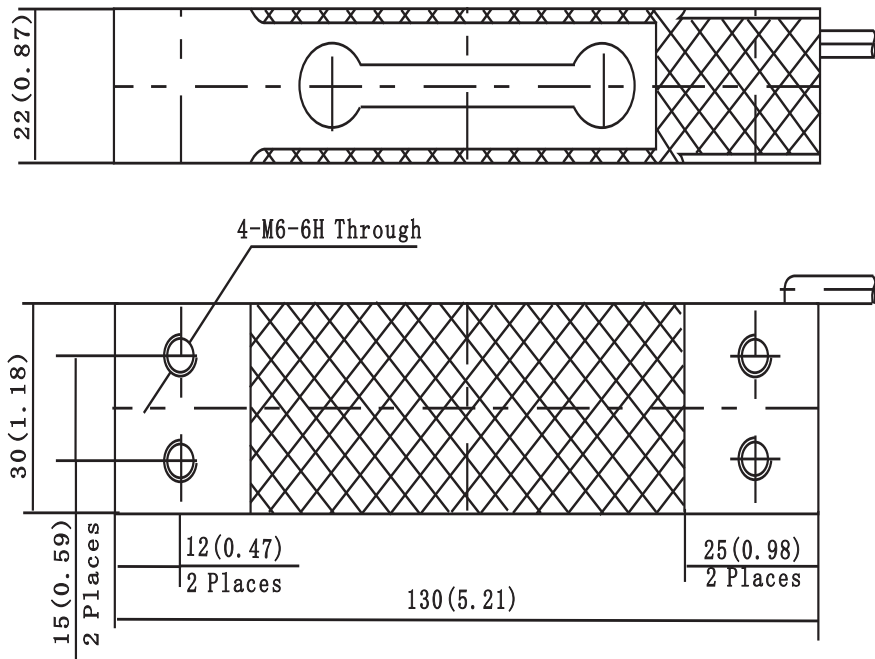

Wiring:

Shielded 4 conductor cable and cable jacket is PVC
Cable Length: 3m
Cable Diameter: 3.8±0.2mm

Output Resistance	Input		Output		Shield
	+	-	+	-	
1000 (Ω)	R	W	G	B	Transparent
350 (Ω)	R	B	G	W	

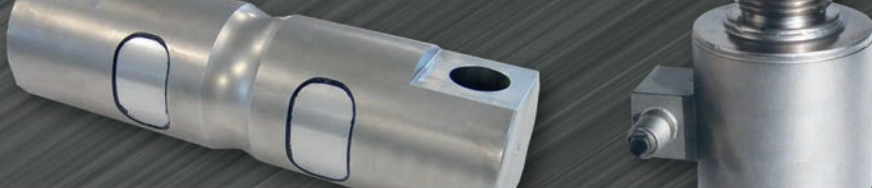

L6E



- L6E load cells are available in the capacities 50kg~300kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for pricing scales, platform scales and other electronic weighing devices

Features

- Capacities: 50kg~300kg
- High accuracy
- Max. platform size: 400mm x 400mm
- OIML Cert. No.: R60/2000-NL1-10.22
- NTEP Cert. No.: CC11-062



Specifications		
Capacity	kg	50/60/80/100/150/200/300
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Interval	Vmin	Emax/7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.2% load value/100mm

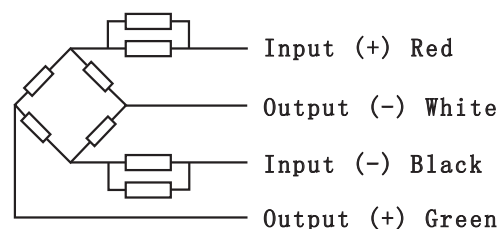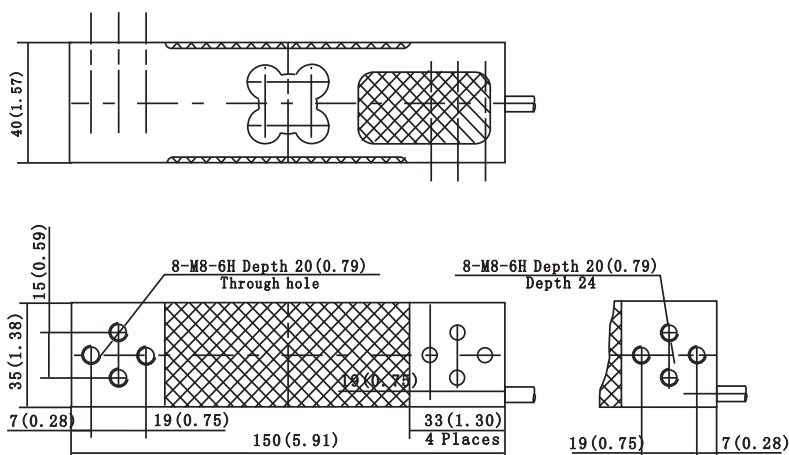

Wiring:

Shielded 4 conductor cable and cable jacket is PVC
Cable Length: 2.0±0.1m
Cable Diameter: 5.3±0.2mm

Part Number	Capacity	Ship Weight
L6E-C3-50KG-2B	50KG aluminum single point metric	4 lb
L6E-C3-60KG-2B	60KG aluminum single point metric	4 lb
L6E-C3-80KG-2B	80KG aluminum single point metric	4 lb
L6E-C3-100KG-2B	100KG aluminum single point metric	4 lb
L6E-C3-150KG-2B	150KG aluminum single point metric	4 lb
L6E-C3-200KG-2B	200KG aluminum single point metric	4 lb
L6E-C3-300KG-2B	300KG aluminum single point metric	4 lb
L6E-C3-200KG-3B	200KG aluminum single point metric	4 lb

Compatible Products	
Manufacturer	Model
Celtron	LPS

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



L6F

- L6F load cells are available in the capacities 50kg~2000kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic pricing scales, platform scales and other electronic weighing devices

Features

- Capacities: 50kg~2000kg
- High accuracy
- Max. platform size:
50kg~200kg 600mm x 600mm
250kg~500kg 600mm x 800mm
750kg~2000kg 1200mm x 1200mm
- OIML Cert. No.: R60/2000-CN1-06.01
- PTB Approval No.: D09-06.10





Specifications		
Capacity	kg	50/100/150/200/250/500/750/1000/2000
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

Part Number	Capacity	Ship Weight
L6F-C3-50KG	50KG aluminum single point metric	4 lb
L6F-C3-0.1t	100KG aluminum single point metric	4 lb
L6F-C3-0.15t	150KG aluminum single point metric	4 lb
L6F-C3-0.2t	200KG aluminum single point metric	4 lb
L6F-C3-0.25t	250KG aluminum single point metric	4 lb
L6F-C3-0.5t	500KG aluminum single point metric	4 lb
L6F-C3-0.75t	750KG aluminum single point metric	8 lb
L6F-C3-1t	1000KG aluminum single point metric	8 lb
L6F-C3-2t	2000KG aluminum single point metric	8 lb

Compatible Products	
Manufacturer	Model
Tedea	1320
Celtron	HOC



Outline Dimensions mm (inch)						
Dimension	H	H1	L	W	W1	M
Capacity						
50~200kg, 250kgSE	75 (2.95)	50 (1.97)	156 (6.14)	44 (1.73)	24 (0.94)	M12-7H depth 20 (0.79)
250~500kg, 750kgSE	95 (3.74)	70 (2.76)	146 (5.75)	60 (2.36)	36 (1.42)	M12-7H depth 18 (0.71)
750~2000kg	125 (4.92)	85 (3.35)	176 (6.93)	76 (2.99)	46 (1.81)	M16-7H depth 20 (0.79)

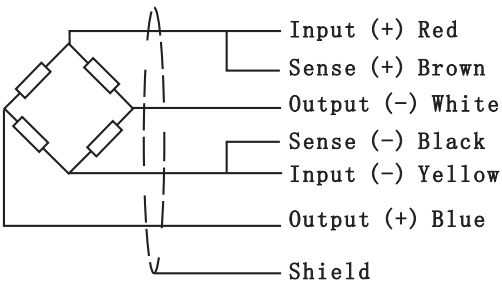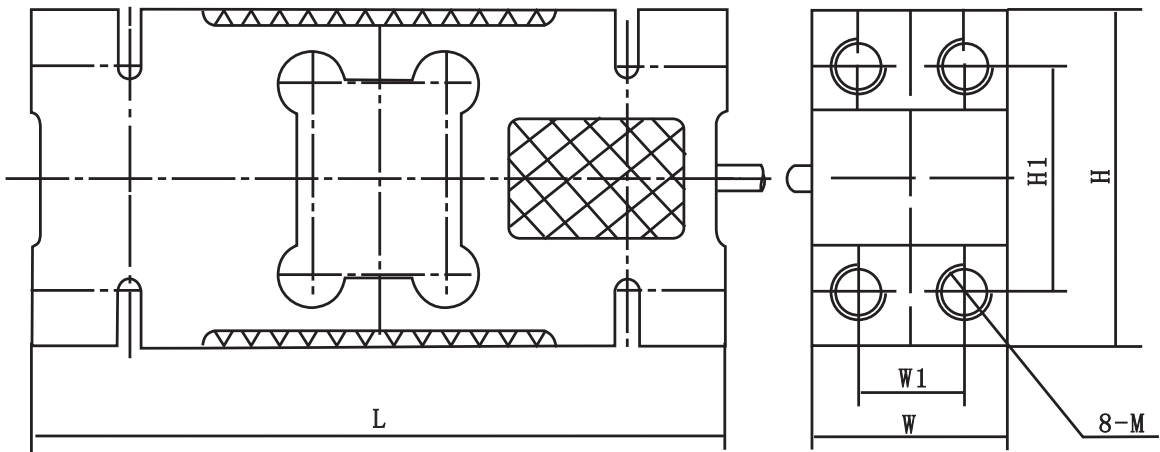

Wiring:
 Shielded 6 conductor cable and cable jacket is PVC
 Cable Length: 3±0.1m
 Cable Diameter: 6.2±0.2mm

Single Point



L6G

- L6G load cells are available in the capacities 50kg~600kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic pricing scales, platform scales and other electronic weighing devices



Features

- Capacities: 50kg~600kg
- Max. platform size: 600mm x 600mm
- PTB Approval No.: D09-03.22 Revision 2
- High accuracy
- OIML Cert. No.: R60/2000-CN1-00.03



Specifications

Capacity	kg	50/100/150/200/250/300/500/600
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6/1065±15
Output Resistance	(Ω)	350±3/1000±10
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

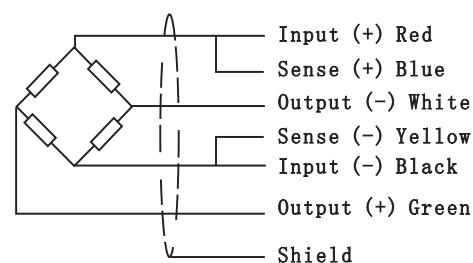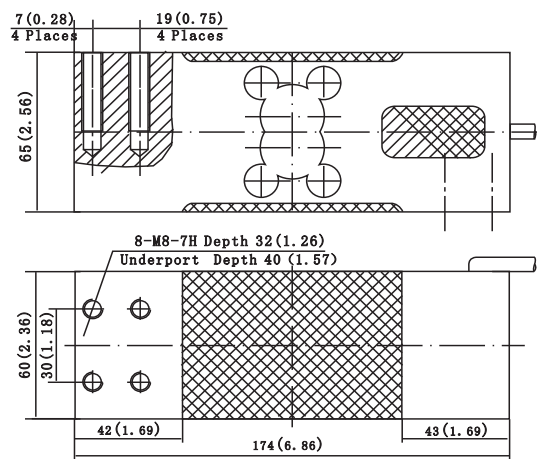

Wiring:

Shielded 6 conductor cable and cable jacket is PVC
Cable Length: 3±0.1m
Cable Diameter: 6±0.2mm
The shield is connected to the element

Part Number	Capacity	Ship Weight
L6G-C3-50KG	50KG aluminum single point metric	4 lb
L6G-C3-0.1t	100KG aluminum single point metric	4 lb
L6G-C3-0.15t	150KG aluminum single point metric	4 lb
L6G-C3-0.2t	200KG aluminum single point metric	4 lb
L6G-C3-0.25t	250KG aluminum single point metric	4 lb
L6G-C3-0.3t	300KG aluminum single point metric	4 lb
L6G-C3-0.5t	500KG aluminum single point metric	4 lb
L6G-C3-0.6t	600KG aluminum single point metric	4 lb

Compatible Products	
Manufacturer	Model
Revere	672
Celtron	LOC
Transcell	FAV





L6J1

- L6J1 load cells are available in the capacities 0.3kg~3kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic balance and other electronic weighing devices

Features

- Capacities: 0.3kg~3kg
- High accuracy
- Max. platform size: 200mm x 200mm

Specifications		
Capacity	kg	0.3/0.4/0.5/0.6/1/3
Accuracy		C3D
Maximum Number of Verification Intervals	Nmax	2500
Minimum Number of Verification Intervals	Vmin	E _{max} /5000
Combined Error	(%FS)	≤±0.030
Creep	(%FS/30min)	≤±0.020
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.030
Temperature Effect on Zero	(%FS/10°C)	≤±0.030
Output Sensitivity	(mV/V)	1.0±0.01
Input Resistance	(Ω)	394±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

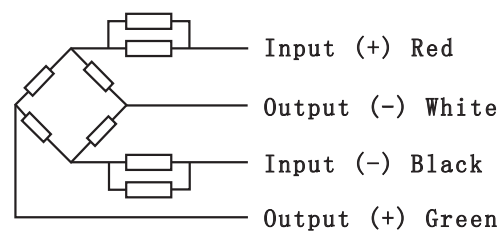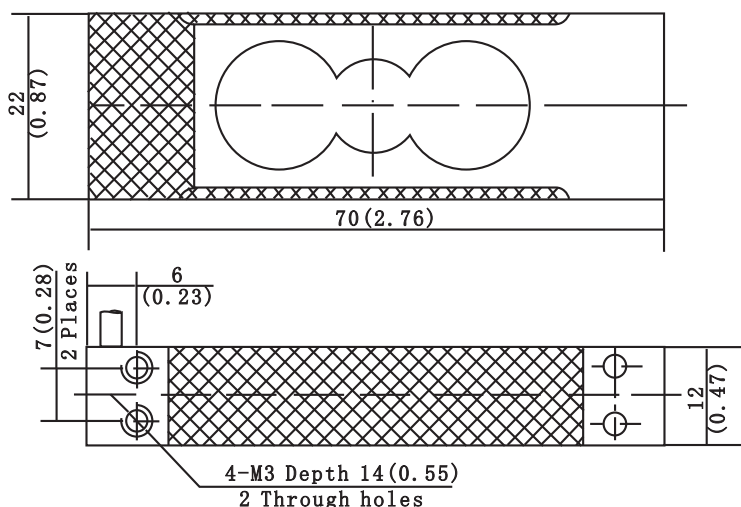

Wiring:

Shielded 4 conductor cable and cable jacket is PVC
 Cable Length: 0.45±0.05m
 Cable Diameter: 3.0±0.2mm

Part Number	Capacity	Ship Weight
L6J1-C3D-0.3KG	0.3KG aluminum single point metric	2 lb
L6J1-C3D-0.4KG	0.4KG aluminum single point metric	2 lb
L6J1-C3D-0.5KG	0.5KG aluminum single point metric	2 lb
L6J1-C3D-0.6KG	0.6KG aluminum single point metric	2 lb
L6J1-C3D-1KG	1KG aluminum single point metric	2 lb
L6J1-C3D-3KG	3KG aluminum single point metric	2 lb

Compatible Products	
Manufacturer	Model
Tedea	1006



L6N



- L6N load cells are available in the capacities 3kg~100kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic balance and other electronic weighing devices

Features

- Capacities: 3kg~100kg
- Max. platform size: 400mm x 400mm
- PTB Approval No.: D09-06.11
- High accuracy
- OIML Cert. No.: R60/2000-CN1-06.04
- NTEP Cert. No.: CC11-055



Specifications		
Capacity	kg	3/5/8/10/15/20/30/50/75/100
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	Emax/7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

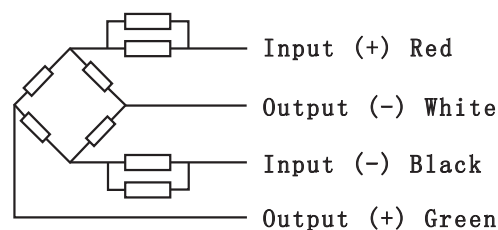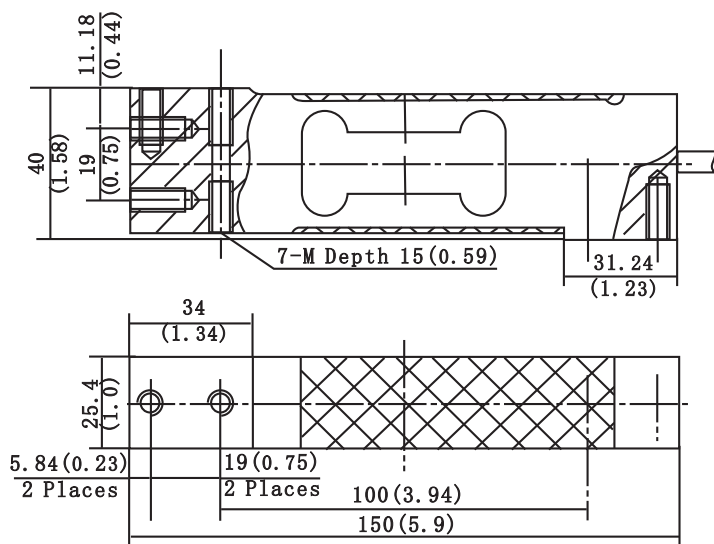


Wiring:

Shielded 4 conductor cable and cable jacket is PVC
 Cable Length: 3.0±0.05m
 Cable Diameter: 5.0±0.2mm



Part Number	Capacity	Ship Weight
L6N-C3-3KG	3KG aluminum single point metric	2 lb
L6N-C3-5KG	5KG aluminum single point metric	2 lb
L6N-C3-8KG	8KG aluminum single point metric	2 lb
L6N-C3-10KG	10KG aluminum single point metric	2 lb
L6N-C3-15KG	15KG aluminum single point metric	2 lb
L6N-C3-20KG	20KG aluminum single point metric	2 lb
L6N-C3-30KG	30KG aluminum single point metric	2 lb
L6N-C3-50KG	50KG aluminum single point metric	2 lb
L6N-C3-75KG	75KG aluminum single point metric	2 lb
L6N-C3-100KG	100KG aluminum single point metric	2 lb
L6N-C3-3KG-Y	3KG aluminum single point imperial	2 lb
L6N-C3-5KG-Y	5KG aluminum single point imperial	2 lb
L6N-C3-8KG-Y	8KG aluminum single point imperial	2 lb
L6N-C3-10KG-Y	10KG aluminum single point imperial	2 lb
L6N-C3-15KG-Y	15KG aluminum single point imperial	2 lb
L6N-C3-20KG-Y	20KG aluminum single point imperial	2 lb
L6N-C3-30KG-Y	30KG aluminum single point imperial	2 lb
L6N-C3-50KG-Y	50KG aluminum single point imperial	2 lb
L6N-C3-75KG-Y	75KG aluminum single point imperial	2 lb
L6N-C3-100KG-Y	100KG aluminum single point imperial	2 lb
L6N-C3-8KG-3B	8KG aluminum single point metric 3M cable	2 lb

Compatible Products	
Manufacturer	Model
Revere	642
HBM	SP4
Tedea	1042
Celtron	MT1041
Rice Lake	RL1042

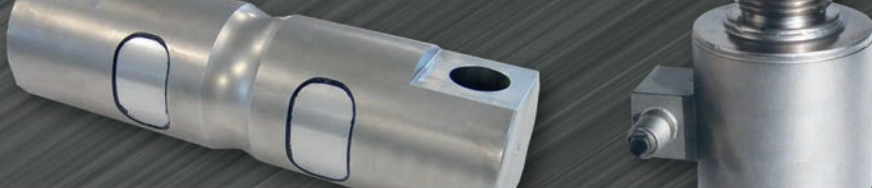

L6Q



- L6Q load cells are available in the capacities 50kg~250kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, stainless steel cover, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic pricing scales, platform scales and other electronic weighing devices

Features

- Capacities: 50kg~250kg
- Max. platform size: 400mm x 400mm
- NTEP Cert. No.: CC11-104
- High accuracy
- OIML Cert. No.: R60/2000-NL1-11.22



Specifications		
Capacity	kg	50/100/150/200/250
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Load Cell Verification Interval	Vmin	Emax/7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

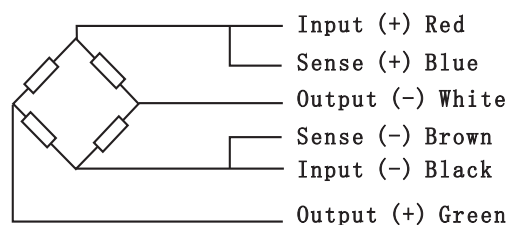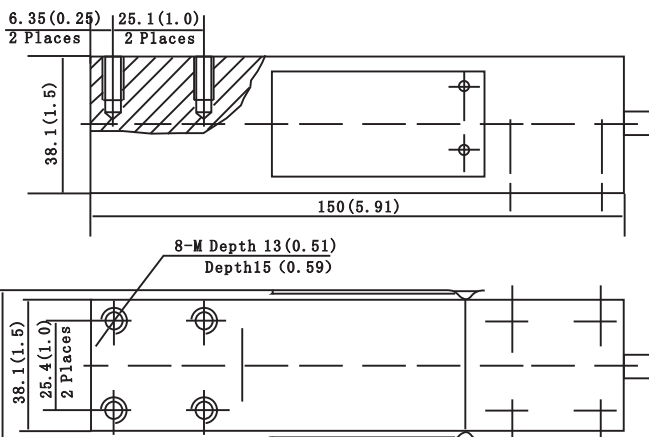

Wiring:

Shielded 6 conductor cable and cable jacket is PVC
 Cable Length: 3.0±0.05m
 Cable Diameter: 5.0±0.2mm

Part Number	Capacity	Ship Weight
L6Q-C3-50KG	50KG aluminum single point metric	2 lb
L6Q-C3-100KG	100KG aluminum single point metric	2 lb
L6Q-C3-150KG	150KG aluminum single point metric	2 lb
L6Q-C3-200KG	200KG aluminum single point metric	2 lb
L6Q-C3-250KG	250KG aluminum single point metric	2 lb
L6Q-C3-50KG-Y	50KG aluminum single point imperial	2 lb
L6Q-C3-100KG-Y	100KG aluminum single point imperial	2 lb
L6Q-C3-150KG-Y	150KG aluminum single point imperial	2 lb
L6Q-C3-200KG-Y	200KG aluminum single point imperial	2 lb
L6Q-C3-250KG-Y	250KG aluminum single point imperial	2 lb

Compatible Products	
Manufacturer	Model
Revere	650
Tedea	1241
Celtron	LPS 60kg~200kg

M	Metric	Imperial
	M6	1/4-20UNC

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



L6T



- L6T load cells are available in the capacities 50kg~1000kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic pricing scales, electronic platform scales and other electronic weighing devices

Features

- Capacities: 50kg~1000kg
- Max. platform size: 600mm x 600mm
- High accuracy
- NTEP Cert. No.: CC12-006
- OIML Cert. No.: R60/2000-DE1-10.11



Specifications		
Capacity	kg	50/75/100/150/200/250/300/500/635/1000
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+65
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	120
Ultimate Overload	(%FS)	150
Corner Correction		0.02% load value/100mm

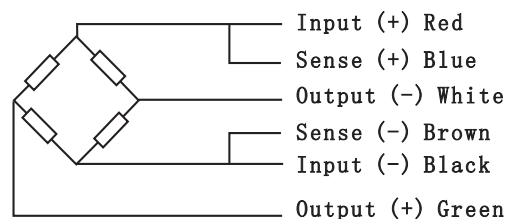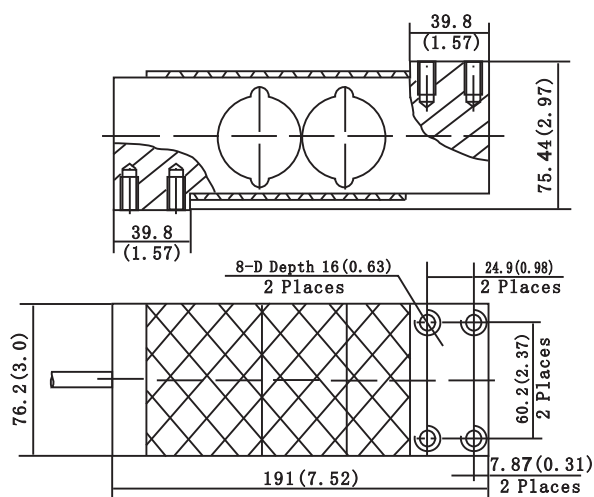

Wiring:

Shielded 6 conductor cable and cable jacket is PVC
Cable Length: 3.0±0.1m
Cable Diameter: 5.0±0.2mm

M	Metric	Imperial
	M8x1.25	5/16-18UNC-2B



Part Number	Capacity	Ship Weight
L6T-C3-50KG	50KG aluminum single point metric	4 lb
L6T-C3-75KG	75KG aluminum single point metric	4 lb
L6T-C3-100KG	100KG aluminum single point metric	4 lb
L6T-C3-150KG	150KG aluminum single point metric	4 lb
L6T-C3-200KG	200KG aluminum single point metric	4 lb
L6T-C3-250KG	250KG aluminum single point metric	4 lb
L6T-C3-300KG	300KG aluminum single point metric	4 lb
L6T-C3-500KG	500KG aluminum single point metric	4 lb
L6T-C3-635KG	635KG aluminum single point metric	4 lb
L6T-C3-1t	1000KG aluminum single point metric	4 lb
L6T-C3-50KG-Y	50KG aluminum single point imperial	4 lb
L6T-C3-75KG-Y	75KG aluminum single point imperial	4 lb
L6T-C3-0.1t-Y	100KG aluminum single point imperial	4 lb
L6T-C3-0.15t-Y	150KG aluminum single point imperial	4 lb
L6T-C3-0.2t-Y	200KG aluminum single point imperial	4 lb
L6T-C3-0.25t-Y	250KG aluminum single point imperial	4 lb
L6T-C3-0.3t-Y	300KG aluminum single point imperial	4 lb
L6T-C3-0.5t-Y	500KG aluminum single point imperial	4 lb
L6T-C3-635KG-Y	635KG aluminum single point imperial	4 lb
L6T-C3-1t-Y	1000KG aluminum single point imperial	4 lb
L6T0C3-100	100LB aluminum single point metric	4 lb
L6T0C3-250	250LB aluminum single point metric	4 lb
L6T0C3-400	400LB aluminum single point metric	4 lb
L6T0C3-500	500LB aluminum single point metric	4 lb
L6T0C3-700	700LB aluminum single point metric	4 lb
L6T0C3-1K	1K aluminum single point metric	4 lb
L6T0C3-100-Y	100LB aluminum single point imperial	4 lb
L6T0C3-250-Y	250LB aluminum single point imperial	4 lb
L6T0C3-400-Y	400LB aluminum single point imperial	4 lb
L6T0C3-500-Y	500LB aluminum single point imperial	4 lb
L6T0C3-700-Y	700LB aluminum single point imperial	4 lb
L6T0C3-1K-Y	1K aluminum single point imperial	4 lb

Compatible Products	
Manufacturer	Model
Revere	642
Tedea	1252



L6W



- L6W load cells are available in the capacities 50kg~635kg
- Aluminum construction with parallel beam
- Silicon adhesive sealed, surface anodized and anti-corrosion
- Integral structure and easy installation
- Suitable for electronic balance and other electronic weighing devices
- Recommended platform size:
50kg~200kg; 600mm x 600mm 250kg~635kg; 600mm x 800mm

Features

- Capacities: 50kg~635kg
- NTEP Cert.No.: 12-0006
- High accuracy
- OIML Cert. No.: R60/2000-CNI-06.03



Specifications		
Capacity	kg	50/100/150/200/250/300/500/635
Accuracy		C3
Approvals		OIML R60 C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E _{max} /7000
Combined Error	(%FS)	≤±0.020
Creep	(%FS/30min)	≤±0.0167
Temperature Effect on Sensitivity	(%FS/10°C)	≤±0.0175
Temperature Effect on Zero	(%FS/10°C)	≤±0.020
Output Sensitivity	(mV/V)	2.0±0.2
Input Resistance	(Ω)	406±6
Output Resistance	(Ω)	350±3
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	2
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300
Corner Correction		0.02% load value/100mm

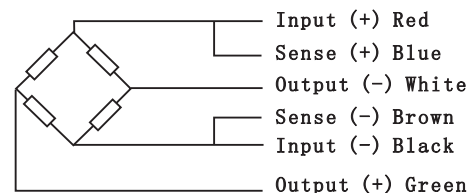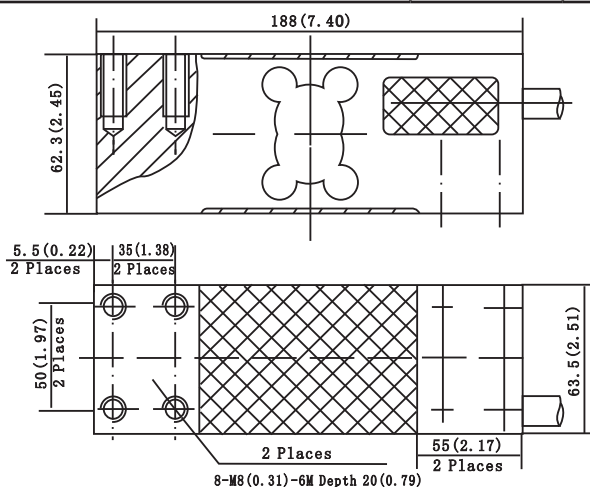

Wiring:

Shielded 4 conductor cable and cable jacket is PVC
Cable Length: 3.0±0.1m
Cable Diameter: 4.7±0.2mm


Part Number	Capacity	Ship Weight
L6W-C3-50KG	50KG aluminum single point metric	4 lb
L6W-C3-100KG	100KG aluminum single point metric	4 lb
L6W-C3-150KG	150KG aluminum single point metric	4 lb
L6W-C3-200KG	200KG aluminum single point metric	4 lb
L6W-C3-250KG	250KG aluminum single point metric	4 lb
L6W-C3-300KG	300KG aluminum single point metric	4 lb
L6W-C3-500KG	500KG aluminum single point metric	4 lb
L6W-C3-635KG	635KG aluminum single point metric	4 lb



VALUE IN
WEIGHING



BM-9-402 / B9C

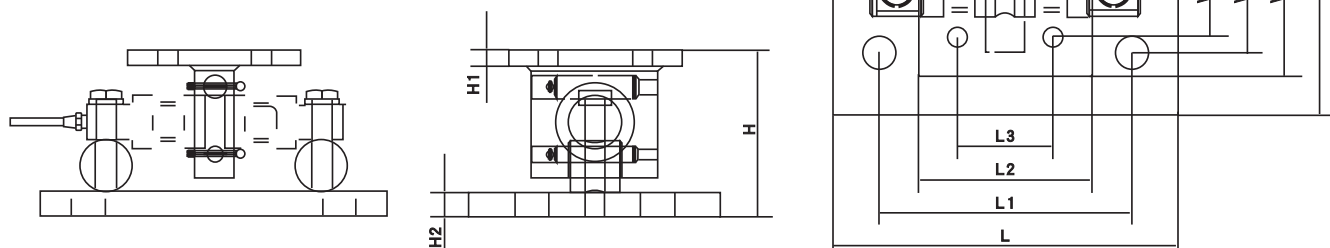

Outline Dimension mm (inch)													
Dimension	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
Capacity													
5-20Klb	279.4 (11)	203.2 (8)	139.7 (5.5)	76.2 (3)	203.2 (8)	139.7 (5.5)	101.6 (4)	76.2 (3)	139.2 (5.48)	12.7 (0.5)	19 (0.75)	26.9 (1.06)	16 (0.63)
30-75Klb	381 (15)	292.1 (11.5)	203.2 (8)	130.3 (5.13)	254 (10)	203.2 (8)	152.4 (6)	130.3 (5.13)	214.1 (8.43)	19.1 (0.75)	25 (1.0)	31 (1.22)	19.1 (0.75)
100-150Klb	457.2 (18)	255.6 (14)	254 (10)	190.5 (7.5)	304.8 (12)	254 (10)	228.6 (9)	190.5 (7.5)	246 (10.39)	31.8 (1.25)	31.8 (1.25)	35.1 (1.38)	20.6 (0.81)
200-250Klb	660.4 (26)	508 (20)	304.8 (12)	228.6 (9)	304.8 (12)	304.8 (12)	152.4 (6)	228.6 (9)	400 (15.73)	50.8 (2)	50.8 (2)	47.8 (1.88)	26.9 (1.06)


Specifications

Safe Overload	150%F.S.
Ultimate Overload	300%F.S.
Maximum Anti-Rotation	40%F.S.
Maximum Anti-Side Loading	20%F.S.
Maximum Vertical Lifting	5-20K:3.3K (1.5t) /30-75K:11K (5t) 100-150K:16.5K (7.5t) /200-250K:68K (31t)

Features:

Stainless steel construction, easy installation with anti-reversal ability. Using under heavy static load or slight dynamic load. Stainless steel, with good ability against corrosive environments.


Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, B9C Load Cell, J-Box JB02-3 and 15' Interface Cable		
BM-9-402-5K-3	5000 lb / 2268 kg	105 lb
BM-9-402-10K-3	10,000 lb / 4535 kg	105 lb
BM-9-402-20K-3	20,000 lb / 9071 kg	120 lb
BM-9-402-30K-3	30,000 lb / 13608 kg	324 lb
BM-9-402-40K-3	40,000 lb / 18144 kg	324 lb
BM-9-402-50K-3	50,000 lb / 22680 kg	330 lb
BM-9-402-60K-3	60,000 lb / 27216 kg	330 lb
BM-9-402-75K-3	75,000 lb / 34019 kg	462 lb
BM-9-402-100K-3	100,000 lb / 45359 kg	483 lb
BM-9-402-150K-3	150,000 lb / 68039 kg	501 lb
BM-9-402-200K-3	200,000 lb / 90718 kg	840 lb
BM-9-402-250K-3	250,000 lb / 113398 kg	840 lb
4 Module Kit: Hardware, B9C Load Cell, J-Box JB02-4 and 15' Interface Cable		
BM-9-402-5K-4	5000 lb / 2268 kg	140 lb
BM-9-402-10K-4	10,000 lb / 4535 kg	140 lb
BM-9-402-20K-4	20,000 lb / 9071 kg	160 lb
BM-9-402-30K-4	30,000 lb / 13608 kg	432 lb
BM-9-402-40K-4	40,000 lb / 18144 kg	432 lb
BM-9-402-50K-4	50,000 lb / 22680 kg	440 lb
BM-9-402-60K-4	60,000 lb / 27216 kg	440 lb
BM-9-402-75K-4	75,000 lb / 34019 kg	616 lb
BM-9-402-100K-4	100,000 lb / 45359 kg	644 lb
BM-9-402-150K-4	150,000 lb / 68039 kg	668 lb
BM-9-402-200K-4	200,000 lb / 90718 kg	1120 lb
BM-9-402-250K-4	250,000 lb / 113398 kg	1120 lb

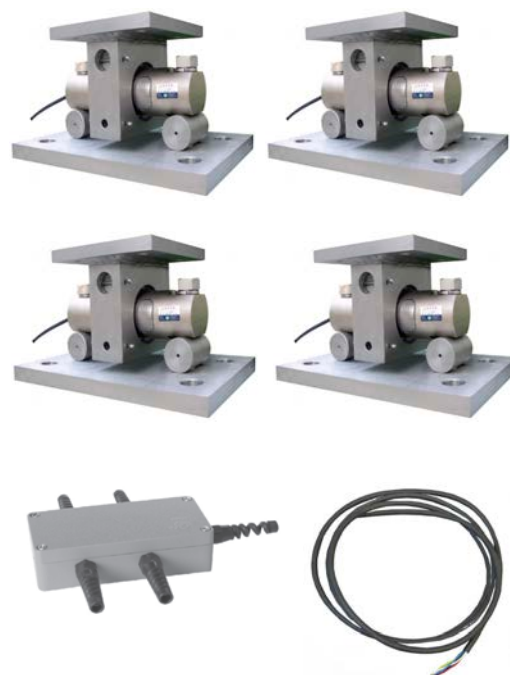

Weighing Modules



BM-9-404 / B9D

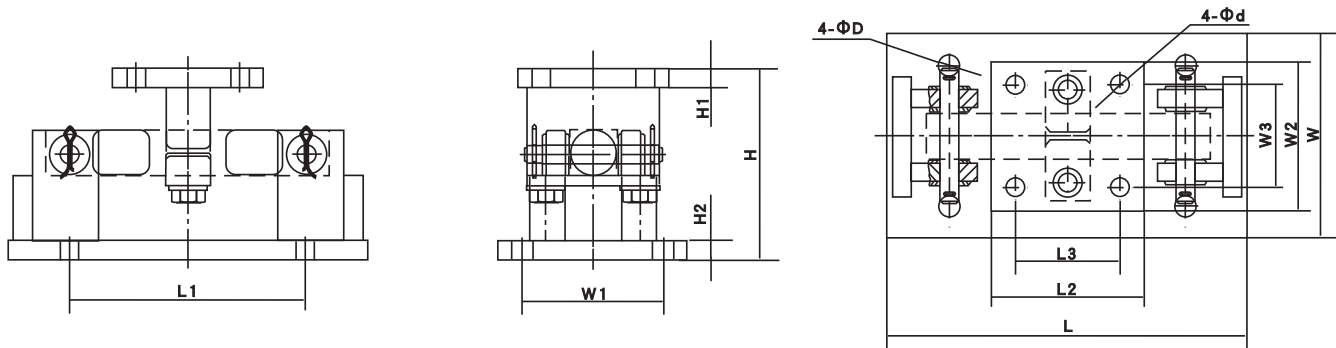


Outline Dimension mm (inch)													
Dimension	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
Capacity													
1-5Klb	241.3 (9.5)	158.8 (6.25)	101.6 (4)	69.9 (2.75)	139.7 (5.5)	95.3 (3.75)	101.6 (4)	69.9 (2.75)	130.3 (5.13)	12.7 (0.5)	12.7 (0.5)	14.2 (0.56)	14.2 (0.56)
10-35Klb	292.1 (11.5)	190.5 (7.5)	203.2 (8)	152.4 (6)	203.2 (8)	152.4 (6)	203.2 (8)	152.4 (6)	200.67 (7.90)	19.1 (0.75)	19.1 (0.75)	20.6 (0.81)	20.6 (0.81)
50-75Klb	406.1 (16)	292.1 (11.5)	203.2 (8)	165.1 (6.5)	298.5 (11.75)	241.3 (9.5)	203.2 (8)	165.1 (6.5)	233.7 (9.2)	25.4 (1)	25.4 (1)	20.6 (0.81)	20.6 (0.81)

Features:


Stainless steel construction, easy installation. Excellent anti-side loading ability. Use under heavy static load or slight dynamic load. Stainless steel, with good ability against corrosive environments.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, B9D Load Cell, J-Box JB02-3 and 15' Interface Cable		
BM-9-404-1K-3	1000 lb / 453 kg	78 lb
BM-9-404-1.5K-3	1500 lb / 680 kg	78 lb
BM-9-404-2K-3	2000 lb / 907 kg	78 lb
BM-9-404-2.5K-3	2500 lb / 1134 kg	78 lb
BM-9-404-4K-3	4000 lb / 1814 kg	78 lb
BM-9-404-5K-3	5000 lb / 2268 kg	78 lb
BM-9-404-10K-3	10,000 lb / 4535 kg	204 lb
BM-9-404-15K-3	15,000 lb / 6803 kg	204 lb
BM-9-404-20K-3	20,000 lb / 9071 kg	204 lb
BM-9-404-25K-3	25,000 lb / 11340 kg	204 lb
BM-9-404-35K-3	35,000 lb / 15876 kg	204 lb
BM-9-404-50K-3	50,000 lb / 22680 kg	435 lb
BM-9-404-75K-3	75,000 lb / 34019 kg	435 lb
4 Module Kit: Hardware, B9D Load Cell, J-Box JB03-4 and 15' Interface Cable		
BM-9-404-1K-4	1000 lb / 453 kg	104 lb
BM-9-404-1.5K-4	1500 lb / 680 kg	104 lb
BM-9-404-2K-4	2000 lb / 907 kg	104 lb
BM-9-404-2.5K-4	2500 lb / 1134 kg	104 lb
BM-9-404-4K-4	4000 lb / 1814 kg	104 lb
BM-9-404-5K-4	5000 lb / 2268 kg	104 lb
BM-9-404-10K-4	10,000 lb / 4535 kg	272 lb
BM-9-404-15K-4	15,000 lb / 6803 kg	272 lb
BM-9-404-20K-4	20,000 lb / 9071 kg	272 lb
BM-9-404-25K-4	25,000 lb / 11340 kg	272 lb
BM-9-404-35K-4	35,000 lb / 15876 kg	272 lb
BM-9-404-50K-4	50,000 lb / 22680 kg	580 lb
BM-9-404-75K-4	75,000 lb / 34019 kg	580 lb

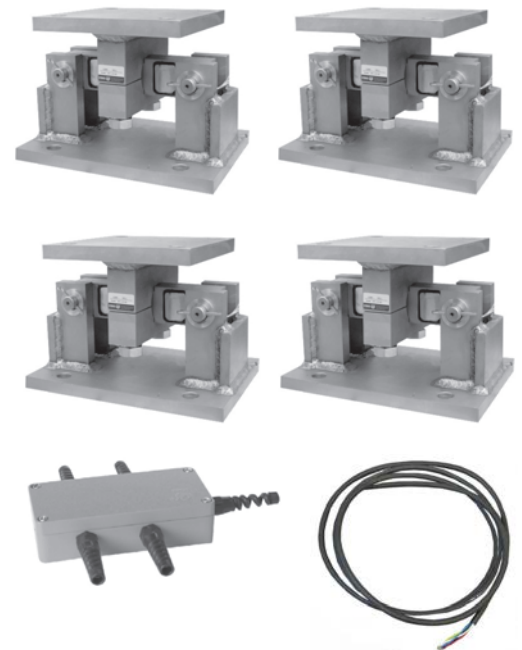



HM-9-401 / H9C

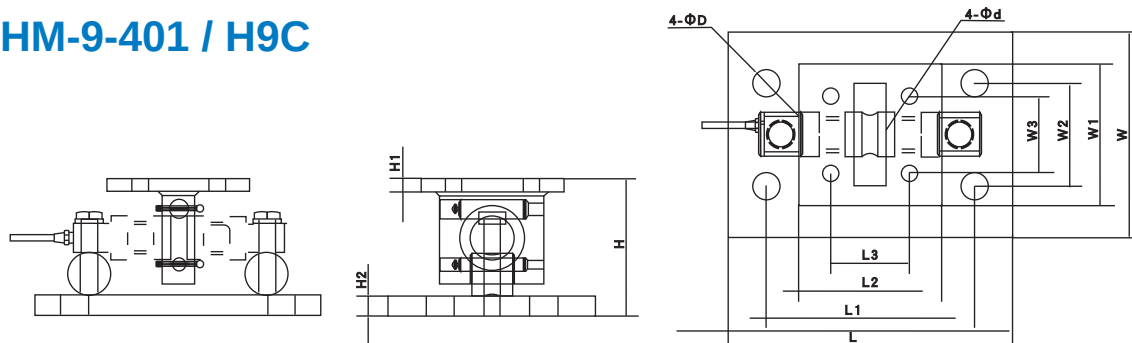


Outline Dimension mm (inch)													
Dimension	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
Capacity													
5-20Klb	279.4 (11)	203.2 (8)	139.7 (5.5)	76.2 (3)	203.2 (8)	139.7 (5.5)	101.6 (4)	76.2 (3)	134.6 (5.3)	12.7 (0.5)	19 (0.75)	26.9 (1.06)	16 (0.63)
30-75Klb	381 (15)	292.1 (11.5)	203.2 (8)	130.3 (5.13)	254 (10)	203.2 (8)	152.4 (6)	130.3 (5.13)	214.1 (8.43)	19.1 (0.75)	25 (1.0)	31 (1.22)	19.1 (0.75)
100-150Klb	457.2 (18)	355.6 (14)	254 (10)	190.5 (7.5)	304.8 (12)	254 (10)	228.6 (9)	190.5 (7.5)	246 (10.39)	31.8 (1.25)	31.8 (1.25)	35.1 (1.38)	20.6 (0.81)
5-20Klb SPEC	279.4 (11)	203.2 (8)	152.4 (6)	76.2 (3)	190.5 (7.5)	152.4 (6)	101.6 (4)	76.2 (3)	134.6 (5.3)	19 (0.75)	19 (0.75)	26.9 (1.06)	14.22 (0.56)

Specifications	
Safe Overload	150%F.S.
Ultimate Overload	300%F.S.
Maximum Anti-Rotation	40%F.S.
Maximum Anti-Side Loading	20%F.S.
Maximum Vertical Lifting	5-20K:3.3K (1.5t) /30-75K:11K (5t) 100-150K:16.5K (7.5t) /200-250K:68K (31t)

Features:




Alloy steel construction, easy installation with anti-reversal ability. Using under heavy static load or slight dynamic load.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, H9C Load Cell, J-Box JBO2-3 and 15' Interface Cable		
HM-9-401-5K-3	5000 lb / 2268 kg	105 lb
HM-9-401-10K-3	10,000 lb / 4535 kg	105 lb
HM-9-401-20K-3	20,000 lb / 9071 kg	120 lb
HM-9-401-30K-3	30,000 lb / 13608 kg	324 lb
HM-9-401-40K-3	40,000 lb / 18144 kg	324 lb
HM-9-401-50K-3	50,000 lb / 22680 kg	330 lb
HM-9-401-60K-3	60,000 lb / 27216 kg	330 lb
HM-9-401-75K-3	75,000 lb / 34019 kg	330 lb
HM-9-401-100K-3	100,000 lb / 45359 kg	483 lb
HM-9-401-150K-3	150,000 lb / 68039 kg	501 lb
4 Module Kit: Hardware, H9C Load Cell, J-Box JB02-4 and 15' Interface Cable		
HM-9-401-5K-4	5000 lb / 2268 kg	140 lb
HM-9-401-10K-4	10,000 lb / 4535 kg	140 lb
HM-9-401-20K-4	20,000 lb / 9071 kg	160 lb
HM-9-401-30K-4	30,000 lb / 13608 kg	432 lb
HM-9-401-40K-4	40,000 lb / 18144 kg	432 lb
HM-9-401-50K-4	50,000 lb / 22680 kg	440 lb
HM-9-401-60K-4	60,000 lb / 27216 kg	440 lb
HM-9-401-75K-4	75,000 lb / 34019 kg	440 lb
HM-9-401-100K-4	100,000 lb / 45359 kg	644 lb
HM-9-401-150K-4	150,000 lb / 68039 kg	688 lb

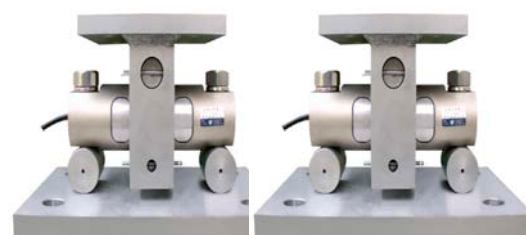



HM-9-403 / H9D

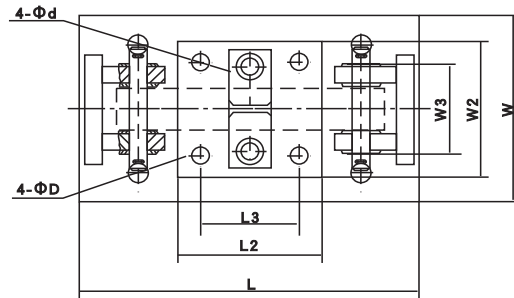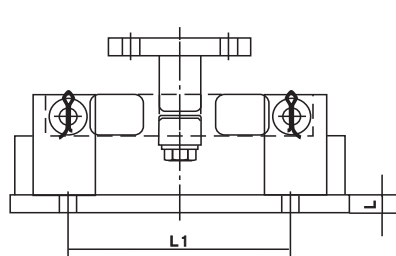

Outline Dimension mm (inch)													
Dimension	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	D	d
Capacity													
1-5Klb	235 (9.25)	158.8 (6.25)	101.6 (4)	69.9 (2.75)	127 (5)	95.3 (3.75)	101.6 (4)	69.9 (2.75)	130.3 (5.13)	12.7 (0.5)	12.7 (0.5)	14.2 (0.56)	14.2 (0.56)
10-35Klb	304.8 (12)	190.5 (7.5)	203.2 (8)	152.4 (6)	203.2 (8)	152.4 (6)	203.2 (8)	152.4 (6)	200.67 (7.90)	19.1 (0.75)	19.1 (0.75)	20.6 (0.81)	20.6 (0.81)
50-75Klb	412.8 (16.25)	292.1 (11.5)	228.6 (9.0)	165.1 (6.5)	304.8 (12)	241.3 (9.5)	228.6 (9.0)	165.1 (6.2)	236.2 (9.3)	25.4 (1)	25.4 (1)	20.6 (0.81)	20.6 (0.81)

Features:

Alloy steel construction, easy installation. Excellent anti-side loading ability with self-aligning ability. Use under heavy static load or slight dynamic load.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, H9D Load Cell, J-Box JB02-3 and 15' Interface Cable		
HM-9-403-1K-3	1000 lb / 453 kg	72 lb
HM-9-403-1.5K-3	1500 lb / 680 kg	72 lb
HM-9-403-2K-3	2000 lb / 907 kg	72 lb
HM-9-403-2.5K-3	2500 lb / 1134 kg	72 lb
HM-9-403-4K-3	4000 lb / 1814 kg	72 lb
HM-9-403-5K-3	5000 lb / 2268 kg	72 lb
HM-9-403-10K-3	10,000 lb / 4535 kg	204 lb
HM-9-403-15K-3	15,000 lb / 6803 kg	204 lb
HM-9-403-20K-3	20,000 lb / 9071 kg	204 lb
HM-9-403-25K-3	25,000 lb / 11340 kg	204 lb
HM-9-403-35K-3	35,000 lb / 15876 kg	204 lb
HM-9-403-50K-3	50,000 lb / 22680 kg	435 lb
HM-9-403-75K-3	75,000 lb / 34019 kg	435 lb
4 Module Kit: Hardware, H9D Load Cell, J-Box JB02-4 and 15' Interface Cable		
HM-9-403-1K-4	1000 lb / 453 kg	96 lb
HM-9-403-1.5K-4	1500 lb / 680 kg	96 lb
HM-9-403-2K-4	2000 lb / 907 kg	96 lb
HM-9-403-2.5K-4	2500 lb / 1134 kg	96 lb
HM-9-403-4K-4	4000 lb / 1814 kg	96 lb
HM-9-403-5K-4	5000 lb / 2268 kg	96 lb
HM-9-403-10K-4	10,000 lb / 4535 kg	272 lb
HM-9-403-15K-4	15,000 lb / 6803 kg	272 lb
HM-9-403-20K-4	20,000 lb / 9071 kg	272 lb
HM-9-403-25K-4	25,000 lb / 11340 kg	272 lb
HM-9-403-35K-4	35,000 lb / 15876 kg	272 lb
HM-9-403-50K-4	50,000 lb / 22680 kg	580 lb
HM-9-403-75K-4	75,000 lb / 34019 kg	580 lb






VALUE IN
WEIGHING



BM-8-404 / B8D

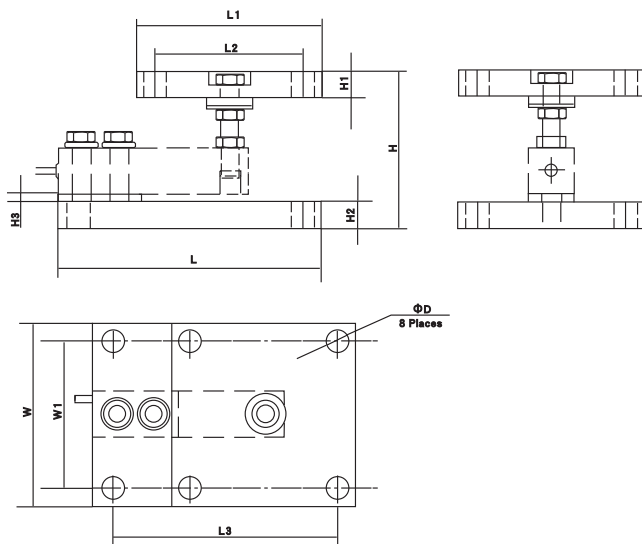

Outline Dimension mm (inch)		
Capacity	0.5t-2t (1Klb-4Klb)	2.5t-5t (5Klb-10Klb)
Dimension		
L	180.9 (7.12)	215.9 (8.5)
L1	127 (5.0)	127 (5.0)
L2	101.6 (5.0)	101.6 (5.0)
L3	152.4 (6.0)	177.8 (7.0)
H	100-120 (3.94-4.72)	130-150 (5.12-5.91)
H1	18 (0.71)	26 (1.02)
H2	18 (0.71)	26 (1.02)
H3	6.1 (0.24)	6.1 (0.24)
W	127 (5.0)	127 (5.0)
W1	101.6 (4.0)	101.16 (4.0)
D	16 (0.63)	16 (0.63)

Features:

Stainless steel construction, easy installation. Adjustable mounting height. Using under heavy static load or slight dynamic load. Good ability against corrosive environments.


Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, B8D Load Cell, J-Box JB02-3 and 15' Interface Cable		
BM-8-404-0.5K-3	500 lb / 226 kg	51 lb
BM-8-404-1K-3	1000 lb / 453 kg	51 lb
BM-8-404-1.5K-3	1500 lb / 680 kg	51 lb
BM-8-404-2K-3	2000 lb / 907 kg	51 lb
BM-8-404-2.5K-3	2500 lb / 1134 kg	51 lb
BM-8-404-3K-3	3000 lb / 1360 kg	51 lb
BM-8-404-4K-3	4000 lb / 1814 kg	51 lb
BM-8-404-5KS-3	5000 lb / 2268 kg	78 lb
BM-8-404-5KL-3	5000 lb / 2268 kg	78 lb
BM-8-404-7.5K-3	7500 lb / 3401 kg	78 lb
BM-8-404-10K-3	10,000 lb / 4535 kg	78 lb
4 Module Kit: Hardware, B8D Load Cell, J-Box JB02-4 and 15' Interface Cable		
BM-8-404-0.5K-4	500 lb / 226 kg	68 lb
BM-8-404-1K-4	1000 lb / 453 kg	68 lb
BM-8-404-1.5K-4	1500 lb / 680 kg	68 lb
BM-8-404-2K-4	2000 lb / 907 kg	68 lb
BM-8-404-2.5K-4	2500 lb / 1134 kg	68 lb
BM-8-404-3K-4	3000 lb / 1360 kg	68 lb
BM-8-404-4K-4	4000 lb / 1814 kg	68 lb
BM-8-404-5KS-4	5000 lb / 2268 kg	104 lb
BM-8-404-5KL-4	5000 lb / 2268 kg	104 lb
BM-8-404-7.5K-4	7500 lb / 3401 kg	104 lb
BM-8-404-10K-4	10,000 lb / 4535 kg	104 lb



Weighing Modules



BM-8-406 / BM8H

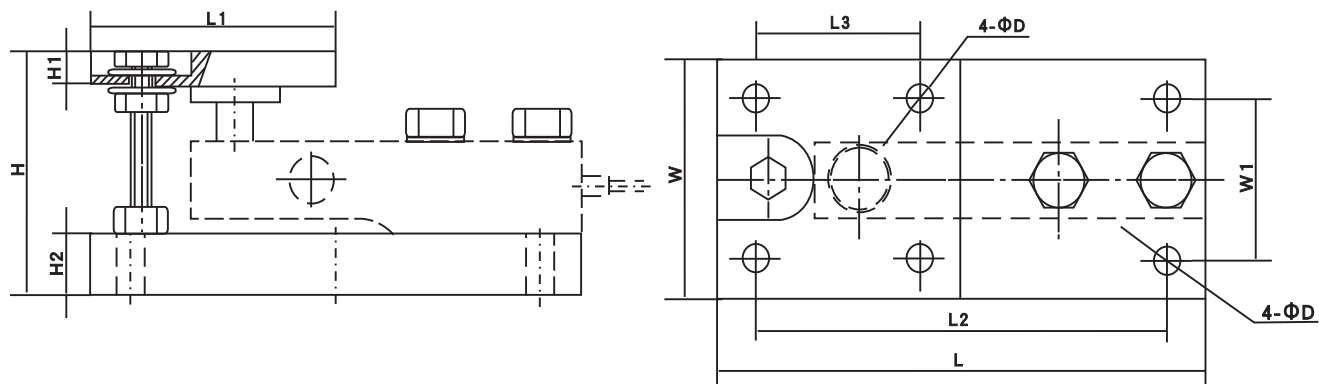

Outline Dimension mm (inch)

Dimension	L	L1	L2	L3	H	H1	H2	W	W1	D
Capacity										
0.25t-2t 0.5-5Klb	177.8 (7.0)	114.3 (4.5)	150.4 (6.0)	88.9 (4.5)	104.8 (4.13)	25.4 (1.0)	19 (0.75)	114.3 (4.50)	88.9 (4.5)	11 (0.43)
5t 10Klb	235 (9.25)	152.4 (6.0)	184.2 (7.25)	101.6 (4.0)	136.5 (5.37)	32 (1.26)	25.4 (1.0)	152.4 (6.0)	101.6 (4.0)	17.5 (0.69)

Specifications

Capacity	t	0.25-2	5
Ultimate Load	%F.S.	150	150
Maximum Horizontal Displacement	mm	4	4
Maximum Anti-Rotation	KN	3	10
Material	Stainless steel		

Stainless steel construction, easy installation with anti-reversal ability, anti-overloading ability and self-aligning ability. Good ability against corrosive environments.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, BM8H Load Cell, J-Box JB02-3 and 15' Interface Cable		
BM-8-406-1K-3	1000 lb / 453 kg	33 lb
BM-8-406-2.5K-3	2500 lb / 1134 kg	33 lb
BM-8-406-4K-3	4000 lb / 1814 kg	33 lb
BM-8-406-5K-3	5000 lb / 2268 kg	33 lb
BM-8-406-10K-3	10,000 lb / 4535 kg	45 lb
4 Module Kit: Hardware, BM8H Load Cell, J-Box JB02-4 and 15' Interface Cable		
BM-8-406-1K-4	1000 lb / 453 kg	44 lb
BM-8-406-2.5K-4	2500 lb / 1134 kg	44 lb
BM-8-406-4K-4	4000 lb / 1814 kg	44 lb
BM-8-406-5K-4	5000 lb / 2268 kg	44 lb
BM-8-406-10K-4	10,000 lb / 4535 kg	52 lb






VALUE IN WEIGHING



BM-11-401 / BM11

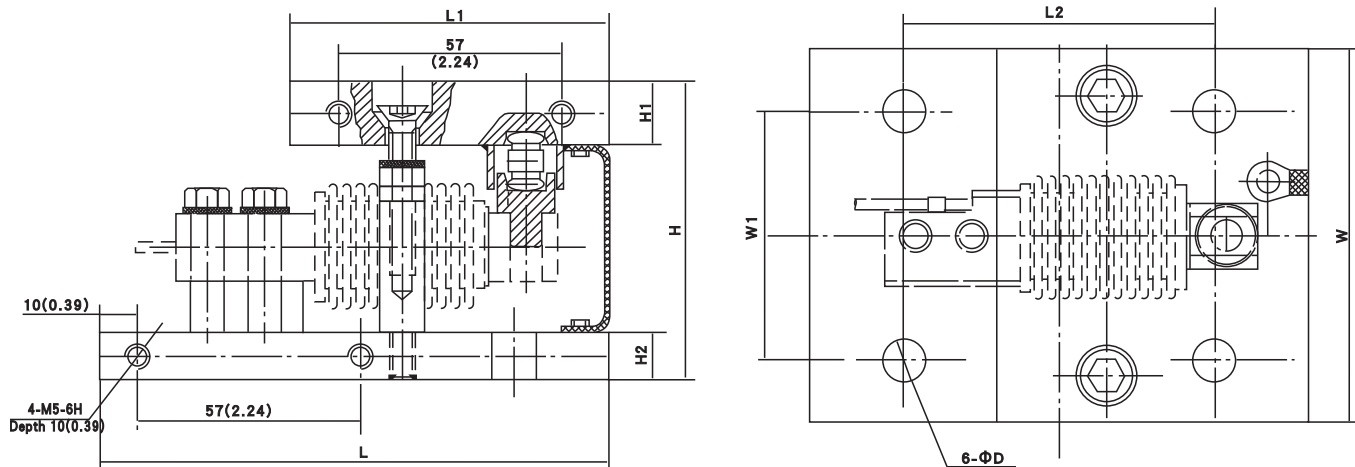


Outline Dimension mm (inch)

Dimension	H	H1	H2	L	L1	L2	W	W1	Φd
Capacity									
5KG-	77	12	12	130	75	95	90	60	Φ9
200KG	(3.03)	(0.47)	(0.47)	(5.12)	(2.95)	(3.74)	(3.54)	(2.36)	(0.35)
350KG-	90	20	15	160	100	100	120	80	Φ14
500KG	(3.54)	(0.79)	(0.59)	(5.3)	(3.94)	(3.94)	(4.72)	(3.15)	(0.55)

Features:

Compact construction, easy installation with anti-reversal ability, anti-overloading ability and self-aligning ability.


Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, BM11 Load Cell, J-Box JB02-3 and 15' Interface Cable		
BM-1-401-20KG-3	44 lb / 20 kg	27 lb
BM-1-401-30KG-3	66 lb / 30 kg	27 lb
BM-1-401-100KG3	220 lb / 100 kg	27 lb
BM-1-401-200KG3	440 lb / 200 kg	27 lb
BM-1-401-350KG3	770 lb / 350 kg	39 lb
BM-1-401-500KG3	1102 lb / 500 kg	39 lb
4 Module Kit: Hardware, BM11 Load Cell, J-Box JB02-4 and 15' Interface Cable		
BM-1-401-20KG-4	44 lb / 20 kg	36 lb
BM-1-401-30KG-4	66 lb / 30 kg	36 lb
BM-1-401-100KG4	220 lb / 100 kg	36 lb
BM-1-401-200KG4	440 lb / 200 kg	36 lb
BM-1-401-350KG4	770 lb / 350 kg	52 lb
BM-1-401-500KG4	1102 lb / 500 kg	52 lb

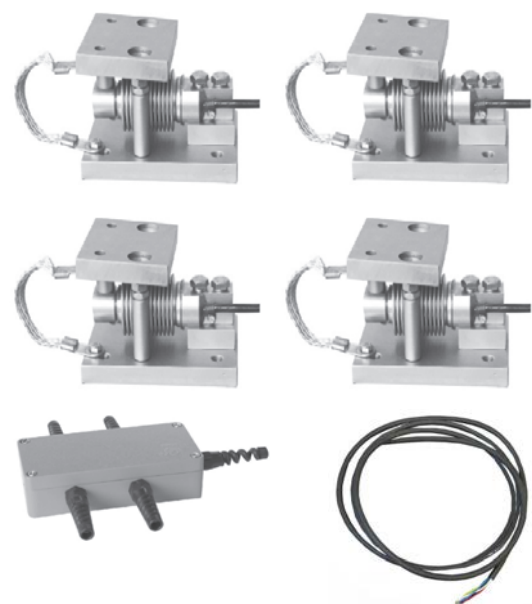

Weighing Modules



HM-8-401 / HM8

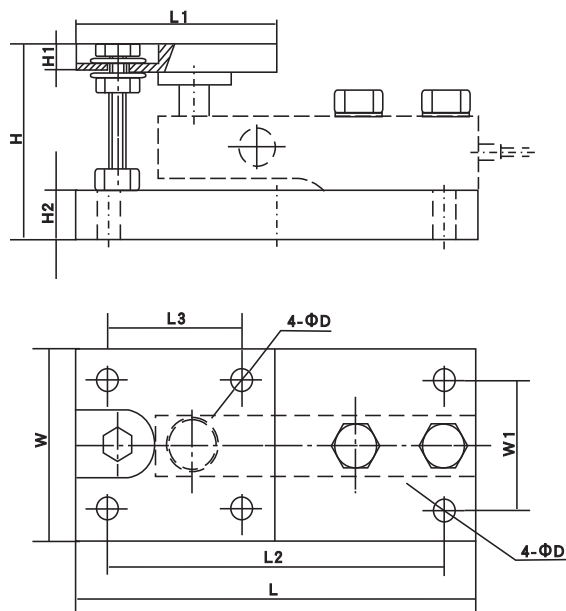

Outline Dimension mm (inch)				
Capacity	0.5-3t	5t	10-15t	20t
Dimension				
L	240 (9.45)	300 (11.8)	355.6 (14.0)	406.4 (16.0)
L1	114.3 (4.5)	152.4 (6.0)	203.2 (8.0)	228.6 (9.0)
L2	214.6 (4.5)	249.2 (9.81)	304.8 (12.0)	342.9 (13.5)
L3	88.9 (4.5)	101.6 (4.0)	152.4 (6.0)	165.1 (6.5)
H	104.8 (4.13)	136.5 (5.37)	190.5 (7.5)	228.6 (9.0)
H1	25.4 (1.0)	42 (1.65)	44.5 (1.75)	50.8 (2.0)
H2	25.4 (1.0)	42 (1.65)	44.5 (1.75)	50.8 (2.0)
W	114.3 (4.50)	152.4 (6.0)	203.2 (8.0)	228.6 (9.0)
W1	88.9 (4.5)	101.6 (4.0)	152.4 (6.0)	165.1 (6.5)
D	11 (0.43)	17.5 (0.69)	20.6 (0.81)	25.5 (1.0)

Specifications					
Capacity	t	0.5-3	5	10-15	20
Ultimate Load	%F.S.	150	150	150	150
Maximum Horizontal Displacement	mm	5	4	-	-
Maximum Anti-Rotation	KN	3	10	30	50
Material	Alloy steel				

Features:


Alloy steel construction, easy installation with anti-reversal ability, anti-overloading ability and self-aligning ability. Using under heavy static load or slight dynamic load.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, HM8 Load Cell, J-Box JB02-3 and 15' Interface Cable		
HM-8-401-0.5t-3	1000 lb / 453 kg	78 lb
HM-8-401-1t-3	2000 lb / 907 kg	78 lb
HM-8-401-2t-3	4000 lb / 1814 kg	84 lb
HM-8-401-2.5t-3	5000 lb / 2268 kg	84 lb
HM-8-401-3t-3	6000 lb / 2721 kg	105 lb
HM-8-401-5t-3	10,000 lb / 4535 kg	120 lb
HM-8-401-10t-3	20,000 lb / 9071 kg	219 lb
HM-8-401-15t-3	30,000 lb / 13608 kg	219 lb
HM-8-401-20t-3	40,000 lb / 18144 kg	264 lb
4 Module Kit: Hardware, HM8 Load Cell, J-Box JB02-4 and 15' Interface Cable		
HM-8-401-0.5t-4	1000 lb / 453 kg	104 lb
HM-8-401-1t-4	2000 lb / 907 kg	104 lb
HM-8-401-2t-4	4000 lb / 1814 kg	112 lb
HM-8-401-2.5t-4	5000 lb / 2268 kg	112 lb
HM-8-401-3t-4	6000 lb / 2721 kg	140 lb
HM-8-401-5t-4	10,000 lb / 4535 kg	160 lb
HM-8-401-10t-4	20,000 lb / 9071 kg	292 lb
HM-8-401-15t-4	30,000 lb / 13608 kg	292 lb
HM-8-401-20t-4	40,000 lb / 18144 kg	352 lb





HM-8-402 / H8C

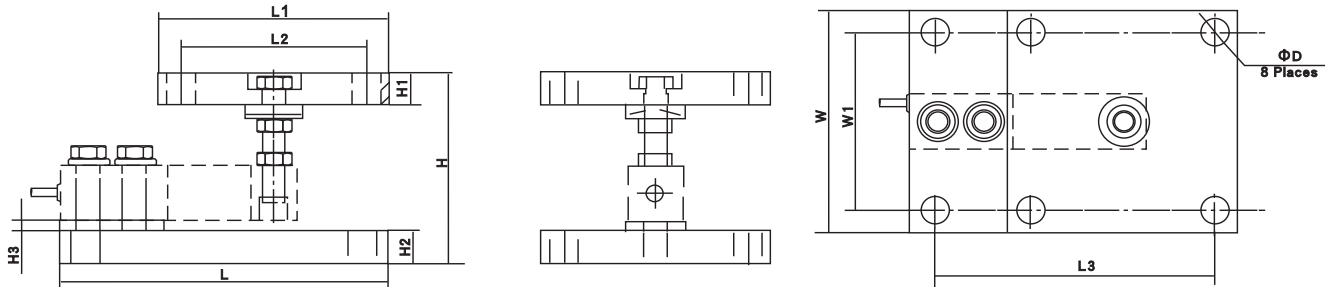

Outline Dimension mm (inch)											
Dimension	L	L1	L2	L3	H	H1	H2	H3	W	W1	D
Capacity											
0.5t-2t 1Klb-4Klb	180.9 (7.12)	127 (5.0)	101.6 (5.0)	152.4 (6.0)	100-120 (3.94-4.72)	18 (0.71)	18 (0.71)	6.1 (0.24)	127 (5.0)	101.6 (4.0)	16 (0.63)
2.5t-5t 5Klb-10Klb	215.9 (8.5)	127 (5.0)	101.6 (5.0)	177.8 (7.0)	130-150 (5.12-5.91)	26 (1.02)	26 (1.02)	6.1 (0.24)	127 (5.0)	101.6 (4.0)	16 (0.63)

Features:
Alloy steel construction, easy installation. Adjustable mounting height. Using under heavy static load or slight dynamic load.

Part Number	Capacity per each load cell	Ship Weight
3 Module Kit: Hardware, H8C Load Cell, J-Box JB02-3 and 15' Interface Cable		
HM-8-402-1K-3	1000 lb / 453 kg	51 lb
HM-8-402-1.5K-3	1500 lb / 680 kg	51 lb
HM-8-402-2K-3	2000 lb / 907 kg	51 lb
HM-8-402-2.5K-3	2500 lb / 1134 kg	51 lb
HM-8-402-3K-3	3000 lb / 1360 kg	51 lb
HM-8-402-4K-3	4000 lb / 1814 kg	51 lb
HM-8-402-5KS-3	5000 lb / 2268 kg	51 lb
HM-8-402-5KL-3	5000 lb / 2268 kg	60 lb
HM-8-402-7.5K-3	7500 lb / 3401 kg	60 lb
HM-8-402-10K-3	10,000 lb / 4355 kg	60 lb
4 Module Kit: Hardware, H8C Load Cell, J-Box JB02-4 and 15' Interface Cable		
HM-8-402-1K-4	1000 lb / 453 kg	68 lb
HM-8-402-1.5K-4	1500 lb / 680 kg	68 lb
HM-8-402-2K-4	2000 lb / 907 kg	68 lb
HM-8-402-2.5K-4	2500 lb / 1134 kg	68 lb
HM-8-402-3K-4	3000 lb / 1360 kg	68 lb
HM-8-402-4K-4	4000 lb / 1814 kg	68 lb
HM-8-402-5KS-4	5000 lb / 2268 kg	68 lb
HM-8-402-5KL-4	5000 lb / 2268 kg	80 lb
HM-8-402-7.5K-4	7500 lb / 3401 kg	80 lb
HM-8-402-10K-4	10,000 lb / 4355 kg	80 lb



Weighing Modules



BY-14-101

Capacity

10t-5t
40t-60t

Features:


Easy installation, good self-aligning ability, anti-reversal ability. Stainless steel construction, anti-corrosion, can be used in hazardous environments. Mainly used for platform scales, automobile testing facilities, electronic truck scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
BY14-101-10/25T	BM14A stainless steel rocker support set	7 lb
BY14-101-40/60t	BM14A stainless steel rocker support set	9 lb




Stainless steel, assembled with BM14A.
M8 screw hole is for anti-reversal occasion.

10t-25t, 10klb-50klb

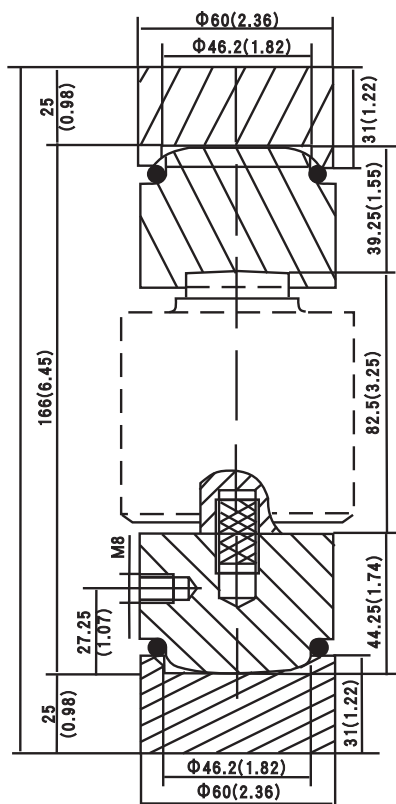

40t-60t, 100klb

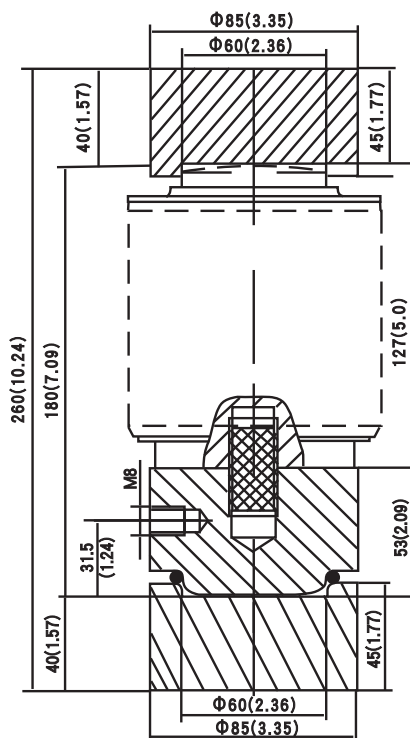


BY-14-105 (BY-14-125)

Capacity
10t-50t

Features:

Easy installation, good self-aligning ability, anti-reversal ability. Stainless steel construction, anti-corrosion, can be used in hazardous environments. Mainly used for platform scales, automobile testing facilities, electronic truck scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
BY14-105-10/50t	BM14G stainless steel rocker support with pin	7 lb

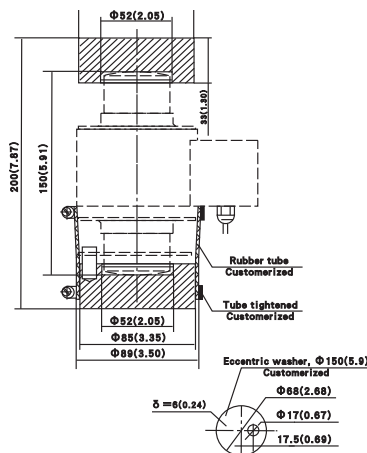

Stainless steel, assembled with BM14G (not included)


BY-14-106 (BY-14-126)

Capacity
10t-50t


Features:

Easy installation, adjustable height, automatically centralized inside. Stainless steel construction, anti-corrosion, can be used in hazardous environments. Mainly used for platform scales and other electronic weighing devices under hazardous environments.

Part Number	Capacity	Ship Weight
BY14-106-10/50t	BM14G stainless steel rocker support with holes and pin	7 lb

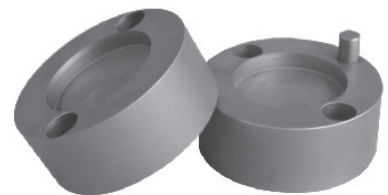

Stainless steel, assembled with BM14G (not included)

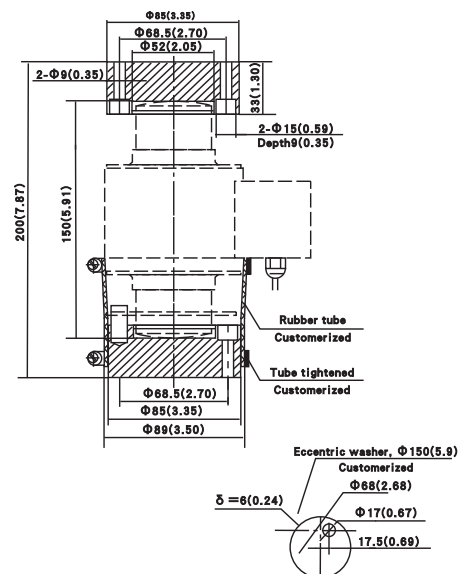



BY-14-108


Capacity
10t-50t

Features:

Easy installation, good self-aligning ability, anti-reversal ability. Stainless steel construction, anti-corrosion, can be used in hazardous environments. Mainly used for platform scales, automobile testing facilities, electronic truck scales and other electronic weighing devices.



Stainless steel, assembled with BM14G (not included)

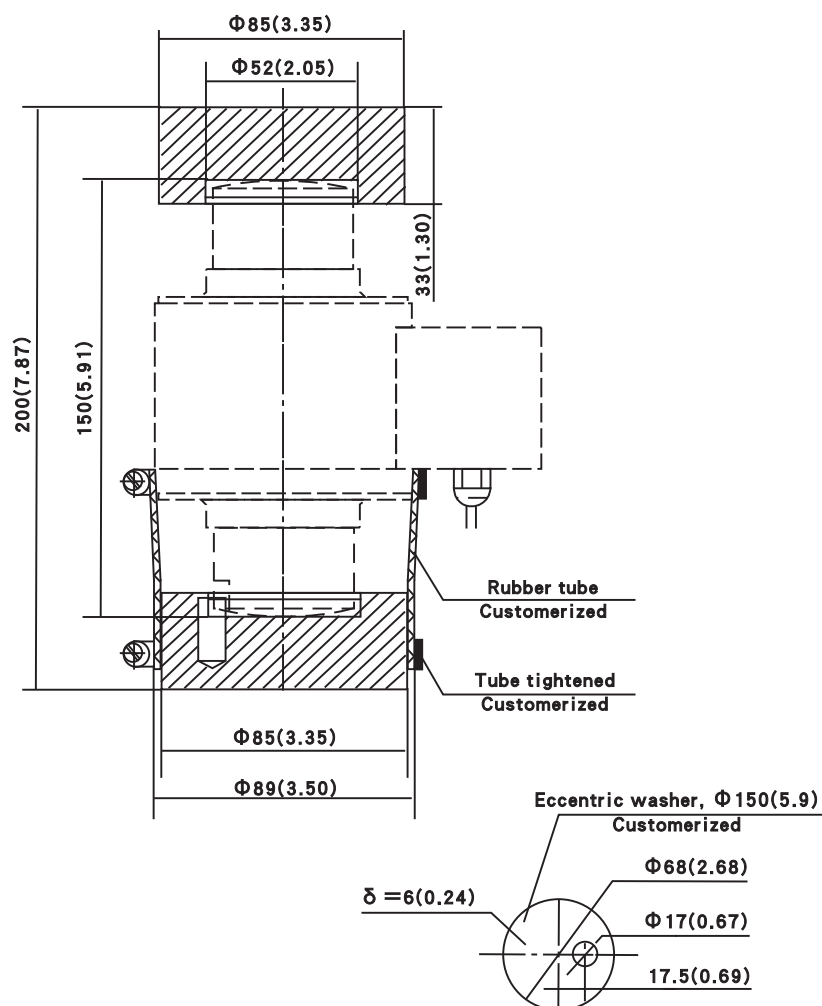

HL-3-001

Capacity

25kg-50kg
100kg-150kg
200kg-300kg
500kg-750kg
1t-1.5t
2t-3t
5t

Features:


Matched with S type load cells, suitable for hybrid scales, crane scales, packaging scales and hopper scales

Outline Dimension mm (inch)						
Capacity	a1	a2	H	MxL	Hook Type	Lifting Weight
25kg-50kg	25 (0.98)	20 (0.79)	97.5 (3.84)	M8x24	Straight handle with single hook LM-006-T	0.25t
100kg-150kg	25 (0.98)	20 (0.79)	97.5 (3.84)	M10x26	Straight handle with single hook LM-006-T	0.25t
200kg-300kg	28 (0.98)	22 (0.87)	106 (4.17)	M12x28	Straight handle with single hook LM-010-T	0.4t
500kg-750kg	34 (1.34)	27 (1.06)	135.5 (5.33)	M12x28	Straight handle with single hook LM-020-T	0.8t
1t-1.5t	40 (1.57)	32 (1.26)	152.5 (6.0)	M12x28	Straight handle with single hook LM-04-T	1.6t
2t-3t	48 (1.89)	38 (1.5)	183 (7.2)	M20x1.5x35	Straight handle with single hook LM-08-T	3.2t
5t	56 (2.2)	45 (1.77)	221 (8.7)	M20x1.5x35	Straight handle with single hook LM-1.6-T	6.3t

Part Number	Capacity	Ship Weight
HL-3-1-25/50KG	S type,Hardware,Hook	2 lb
HL-3-001-150KG	S type,Hardware,Hook	2 lb
HL-3-001-300KG	S type,Hardware,Hook	4.5 lb
HL-3-001-750KG	S type,Hardware,Hook	4.5 lb
HL-3-001-1.5t	S type,Hardware,Hook	2 lb
HL-3-001-2/3t	S type,Hardware,Hook	2 lb
HL-3-001-5t	S type,Hardware,Hook	4.5 lb



Alloy steel, assembled with H3, B3G, H3G, H3F, BM3

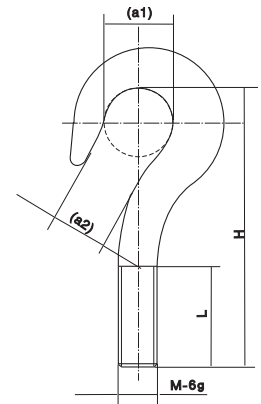

HL-3-002

Capacity

100kg-150kg

Features:


Matched with S type load cells, suitable for hybrid scales, crane scales, packaging scales and hopper scales

Outline Dimension mm (inch)				
Capacity	H	MxL	Hook Type	Lifting Weight
100kg-150kg	22 (0.87)	M10x20	Screw GB/T825-88 M10	0.25t

Part Number	Capacity	Ship Weight
HL-3-002-150KG	S type, hardware, eye bolt	2 lb



Alloy steel, assembled with H3, B3G, H3G, H3F, BM3

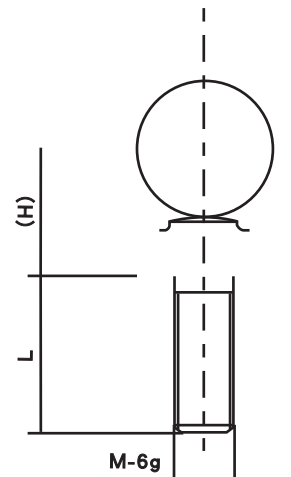



HL-3-003

Capacity

25kg-50kg
100kg-150kg
200kg-300kg
500kg-1.5t
2t-5t

Features:


Matched with S type load cells, suitable for hybrid scales, crane scales, packaging scales, hopper scales, and other electronic weighing devices



Alloy steel, assembled with H3, B3G, H3G, H3F, BM3

Outline Dimension mm (inch)				
Capacity	H	MxL	Shaft Joint Bearing	Lifting Weight
25kg-50kg	42 (1.65)	M8x21	Bearing GB/T9161-2001 SA 8E	0.55t
100kg-150kg	48 (1.89)	M10x26	Bearing GB/T9161-2001 SA 10E	0.81t
200kg-300kg	54 (2.13)	M12x28	Bearing GB/T9161-2001 SA 12E	1.08t
500kg-750kg	54 (2.13)	M12x28	Bearing GB/T9161-2001 SA 12E	1.08t
1t	54 92.13)	M12x28	Bearing GB/T9161-2001 SA 12E	1.08t
1.5t	63 (2.48)	M12x28	Bearing GB/T9161-2001 SA 20E	3.0t
2t-3t	78 (3.07)	M20x1.5x43	Bearing GB/T9161-2001 SA 20E	3.0t
5t	89 (3.5)	M20x1.5x43	Bearing GB/T9161-2001 SA 30ES	6.0t

Part Number	Capacity	Ship Weight
HL3-3-25/50KG	S type, hardware swivel head	2 lb
HL-3-003-150KG	S type, hardware swivel head	2 lb
HL3-3-0.2/0.3t	S type, hardware swivel head	2 lb
HL3-3-0.5/1.5t	S type, hardware swivel head	2 lb
HL3-3-2/5t	S type, hardware swivel head	2 lb

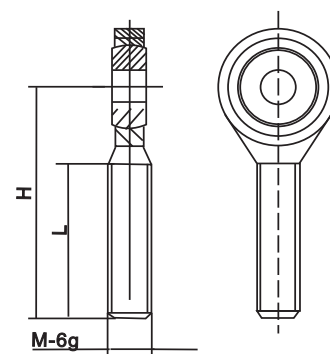

HL-3-004

Capacity

25kg-50kg
100kg-150kg
200kg-300kg
500kg-1.5t
2t-5t

Features:


Matched with S type load cells, suitable for hybrid scales, crane scales, packaging scales, hopper scales, and other electronic weighing devices



Alloy steel, assembled with H3, B3G, H3G, H3F, BM3

Outline Dimension mm (inch)							
Dimension	a1	a2	L	L1	L2	M	Lifting Weight
Capacity							
25kg-50kg	25 (0.98)	20 (0.79)	77 (3.03)	21 (0.83)	77.5 (3.05)	M8	0.25t
100kg-150kg	25 (0.98)	20 (0.79)	83 (3.27)	26 (1.02)	80.5 (3.17)	M10	0.25t
200kg-300kg	28 (1.10)	22 (0.87)	89 (3.50)	28 (1.10)	91 (3.58)	M12	0.4t
500kg-750kg	34 (1.34)	27 (1.06)	89 (3.50)	28 (1.10)	120.5 (47.74)	M12	0.8t
1t	40 (1.57)	32 (1.26)	89 (3.50)	28 (1.10)	137.5 (5.41)	M12	1.08t
1.5t	40 (1.57)	32 (1.26)	118 (4.65)	28 (1.10)	130.5 (5.41)	M12	1.6t
2t-3t	48 (1.89)	38 (1.5)	133 (5.24)	43 (1.69)	15 (6.22)	M20x1.5	3.0t
5t	56 (2.20)	45 (1.77)	149 (5.87)	43 (1.69)	201 (7.91)	M20x1.5	6.0t

Part Number	Capacity	Ship Weight
HL3-4-25/50KG	S type, hardware, mechanical hook, eyebolt	2 lb
HL-3-004-150KG	S type, hardware, mechanical hook, eyebolt	2 lb
HL3-4-0.2/0.3t	S type, hardware, mechanical hook, eyebolt	2 lb
HL3-4-0.5/1.5t	S type, hardware, mechanical hook, eyebolt	2 lb
HL3-4-2/5t	S type, hardware, mechanical hook, eyebolt	2 lb

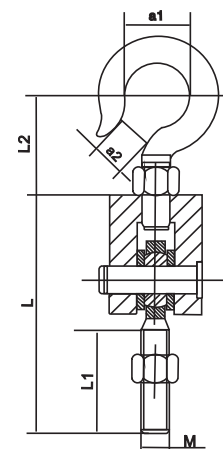

HL-3-005

Capacity

25kg-50kg
100kg-150kg
200kg-300kg
500kg-750kg
1t
1.5t
2t-3t
5t

Features:


Matched with S type load cells, suitable for hybrid scales, crane scales, packaging scales and hopper scales and other weighing devices

Outline Dimension mm (inch)					
Dimension	L	L1	L2	M	Lifting Weight
Capacity					
25kg-50kg	77 (3.03)	21 (0.83)	22 (0.87)	M8	0.16t
100kg-150kg	83 (3.27)	26 (1.02)	27 (1.06)	M10	0.25t
200kg-300kg	89 (3.50)	28 (1.10)	33 (1.3)	M12	0.4t
500kg-750kg	89 (3.50)	28 (1.10)	38 (1.5)	M12	1.0t
1t	89 (3.50)	28 (1.10)	43 (1.7)	M12	1.08t
1.5t	118 (4.65)	28 (1.10)	42 (1.65)	M12	1.6t
2t-3t	133 (5.24)	43 (1.69)	63 (2.48)	M20x1.5	3.0t
5t	149 (5.87)	43 (1.69)	78 (3.07)	M20x1.5	6.0t

Part Number	Capacity	Ship Weight
HL3-5-25/50KG	Swivel lifting accessory	2 lb
HL3-5-100/150KG	Swivel lifting accessory	2 lb
HL3-5-0.2/0.3t	Swivel lifting accessory	2 lb
HL3-5-500/750KG	Swivel lifting accessory	2 lb
HL-3-5-1T	Swivel lifting accessory	2 lb
HL-3-5-1.5T	Swivel lifting accessory	2 lb
HL-3-5-2/3T	Swivel lifting accessory	2 lb
HL-3-5-5T	Swivel lifting accessory	2 lb



Alloy steel, assembled with H3, B3G, H3G, H3F, BM3

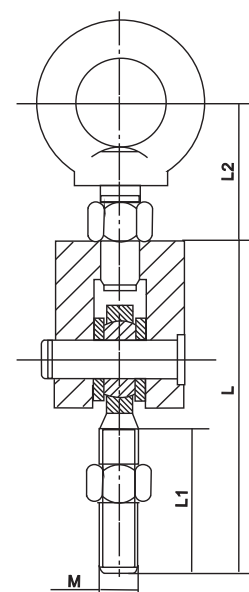



BJ-8-202

Capacity

0.5-2t
2.5-5t
250lb-5KSE
5K-10Klb

Features:


Easy installation, adjustable height, anti-corrosion, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices under hazardous environments.

Outline Dimension mm (inch)				
Dimension	D	H	H1	M
Capacity				
0.5t-2t	60 (2.36)	93 (3.62)	50 (1.97)	M12x1.75
250lb-4Klb				1/2-20UNF
2.5t-5t	80 (3.15)	105 (4.13)	50 (1.97)	M20x2.5 (only for B8D)
5K-10Klb				3/4-16UNF

Part Number	Capacity	Ship Weight
B8 -202-0.5/2t	H8C, HM8C, BM8D stainless steel swivel foot with hardware	2 lb
B8 -202-2.5/5t	H8C, HM8C, BM8D stainless steel swivel foot with hardware	2 lb
BJ8-202-250/5KS	H8C, HM8C, BM8D stainless steel swivel foot with hardware	2 lb
BJ8-202-5/10K	H8C, HM8C, BM8D stainless steel swivel foot with hardware	2 lb



Alloy steel, assembled with B8D, H8C

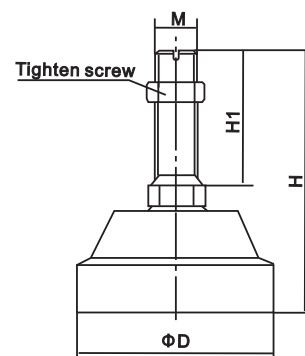

BJ-8-205

Capacity

0.5-2t
2.5-5t
250lb-5KSE
5/10K

Features:


Easy installation, adjustable height, anti-corrosion, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices under hazardous environments.

Outline Dimension mm (inch)				
Dimension	D	H	H1	M
Capacity				
0.5t-2t	80 (3.15)	105 (4.13)	50 (1.97)	M12x1.75
250lb-4Klb				1/2-20UNF

Part Number	Capacity	Ship Weight
B8 -205-0.5/2t	H8C, HM8C, B8D, BM8D hardware stainless feet with cup	2 lb
B8 -205-2.5/5t	H8C, HM8C, B8D, BM8D hardware stainless feet with cup	2 lb
BJ8-205-250/5KS	H8C, HM8C, B8D, BM8D hardware stainless feet with cup	2 lb
BJ8-205-5/10K	H8C, HM8C, B8D, BM8D hardware stainless feet with cup	2 lb



Stainless steel, assembled with B8D, H8C

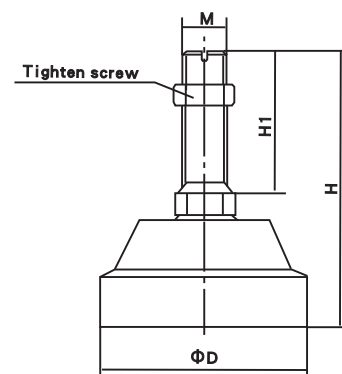



BJ-8-215

Capacity
0.5-2t


Features:

Easy installation, adjustable height, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
BJ 8-215-0.5/2t	H8C, B8D, HM8C, BM8D stainless steel rubber foot with hardware	2 lb



Stainless steel, assembled with H8C, B8D, HM8C, BM8D

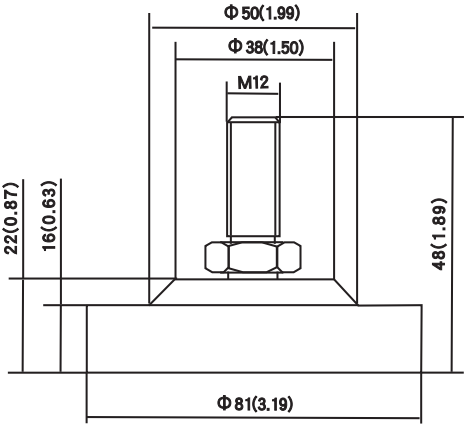

BJ-8-219

Capacity
0.5-2t


Features:

Easy installation, adjustable height, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
BJ 8-219-0.5/2t	H8C, B8D, HM8C, BM8D stainless steel rubber foot and hardware	2 lb



Stainless steel, assembled with H8C, B8D, HM8C, BM8D

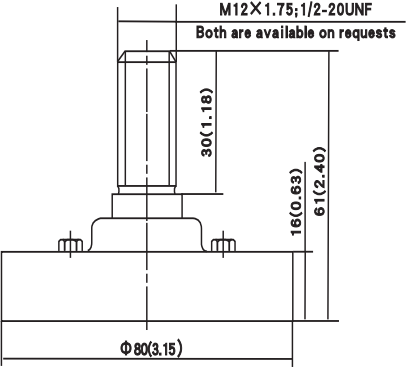



BJ-8-220

Capacity
0.5t-2t


Features:

Easy installation, automatically centralized inside, good ability of anti-side loading.
Mainly used for platform scales, floor scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
BJ 8-220-0.5/2t	H8C, B8D, HM8C, BM8D stainless steel rubber foot with hardware	2 lb



Stainless steel, assembled with H8C, B8D, HM8C, BM8D

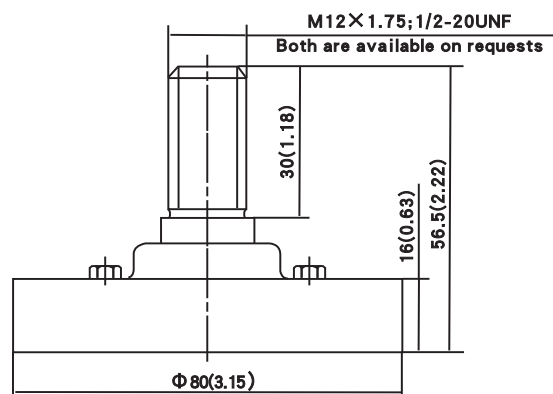




BM-11-402

Capacity
 5kg-200kg

Features:


Compact construction, easy installation with anti-reversal ability, horizontal locating ability, anti-overloading ability and self-aligning ability.

Outline Dimension mm (inch)									
Dimension	H	H1	H2	L	L1	L2	W	W1	Φd
Capacity									
5KG-200KG	77 (3.03)	12 (0.47)	12 (0.47)	130 (5.12)	75 (2.95)	95 (3.74)	90 (3.54)	60 (2.36)	Φ9 (0.35)

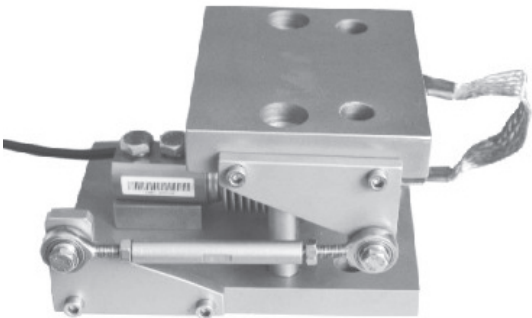

Stainless steel, assembled with H9D, B9D (not included)

Part Number	Capacity	Ship Weight
BM11-402-5/0.2t	BM11 stainless steel mount	9 lb

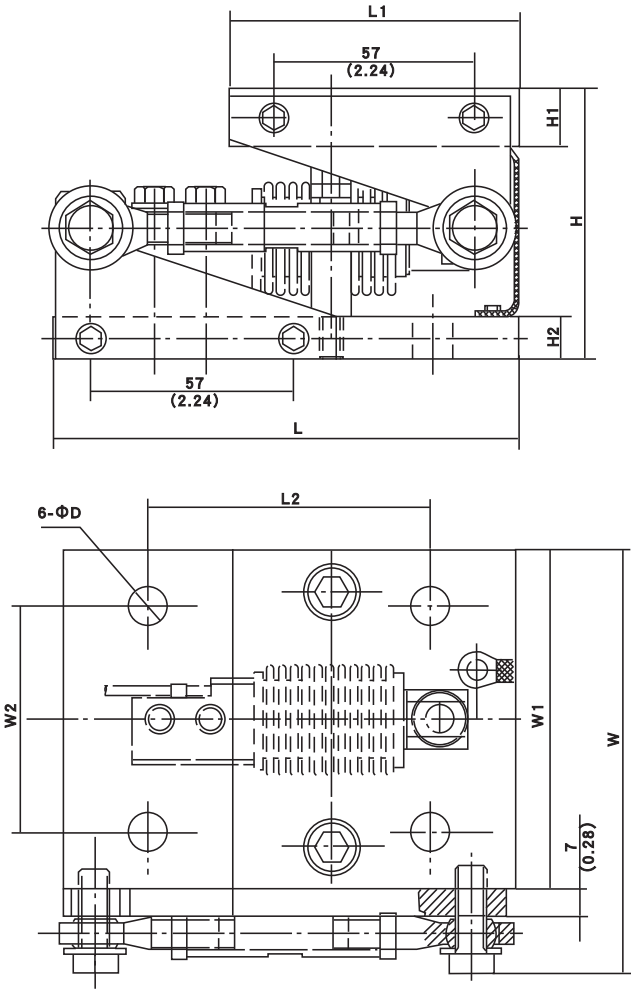



BY-8-104

Capacity

0.5t-2t

2.5t-5t

Features:


Easy installation, good self-aligning ability, automatically centralized with steel ball.
Stainless steel construction, anti-corrosion, can be used under hazardous environments.
Mainly used for platform scales and other electronic weighing devices.



Stainless steel, assembled with H8C, B8D, HM8C, BM8D

Outline Dimension mm (inch)		
Dimension	L	L1
Capacity		
0.5t-2t	12 (0.47)	M12x1.75 1/2-20UNF
2.5t-5t	20 (0.79)	M20x2.5 3/4-16UNF

Part Number	Capacity	Ship Weight
BY-8-104-0.5/2t	H8C, HM8C, B8D, BM8D stainless steel ball and cup assembly	2 lb
BY-8-104-2.5/5t	H8C, HM8C, B8D, BM8D stainless steel ball and cup assembly	2 lb

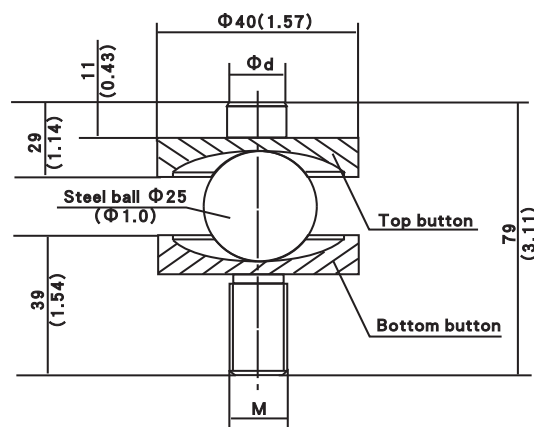


BY-8-106

Capacity

0.5t-2t


Features:

Easy installation, adjustable height, automatically centralized inside. Stainless steel construction, anti-corrosion, can be used under hazardous environments. Mainly used for platform scales and other electronic weighing devices in hazardous environments

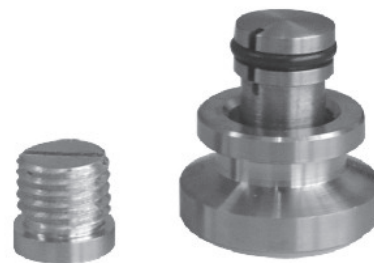

Stainless steel, assembled with H8C-W2

Part Number	Capacity	Ship Weight
BY-8-106-0.5/2T	H8C, HM8C, B8D, BM8D hardware alloy ball and cup assembly	2 lb

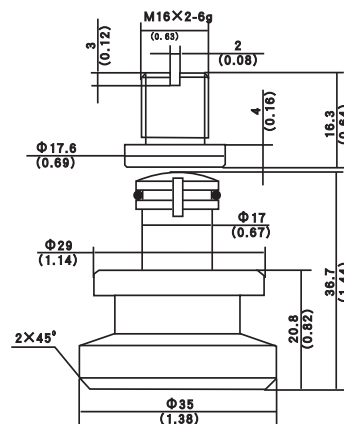



VALUE IN
WEIGHING

HD-8-301

Capacity


0.5t-2t
2.5t-5t
1Klb-4Klb
5Klb-10Klb

Features:


Mainly used for platform scales, floor scales and other electronic weighing devices.

Outline Dimension mm (inch)					
Dimension	L	L1	L2	W	D
Capacity					
0.5t-2t (1Klb-4Klb)	54 (2.13)	13 (0.51)	25.4 (1.0)	32 (1.26)	14 (0.55)
2.5t-5t (5Klb-10Klb)	76 (2.99)	19 (0.75)	38 (1.50)	38 (1.50)	20 (0.79)

Part Number	Capacity	Ship Weight
HD-8-301-0.5/2t	H8C, B8D, HM8C, BM8D stainless steel spacer plate	2 lb
HD-8-301-2.5/5t	H8C, B8D, HM8C, BM8D stainless steel spacer plate	2 lb
HD-8-301-1/4K	H8C, B8D, HM8C, BM8D stainless steel spacer plate	2 lb
HD-8-301-5/10K	H8C, B8D, HM8C, BM8D stainless steel spacer plate	2 lb

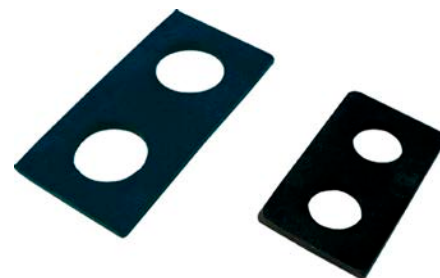

Alloy steel, surface bluing treatment,
assembled with B8D, H8C, HM8C, BM8D

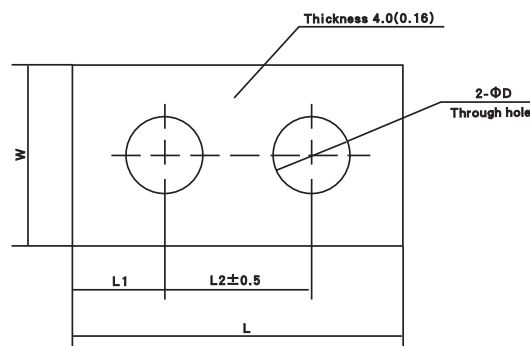

HJ-8-201

Capacity

0.5-2t
2.5-5t
1/4K
5/10K
10t

Features:


Easy installation, adjustable height, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices.

Outline Dimension mm (inch)				
Dimension	D	H	H1	M
Capacity				
0.5t-2t	60 (2.36)	92 (3.62)	50 (1.97)	M12x1.75
250lb-4Klb				1/2-20UNF
2.5t-5t				M18x1.5 (only for H8C) M20x2.5 (only for H8D)
5Klb-10Klb	80 (3.15)	105 (4.13)	50 (1.97)	3/4-16UNF
10t				M24x2
15Klb-20Klb	86 (3.39)	112 (4.41)	50 (1.97)	1-12UNF
(0.5t-2t)-M1	60 (2.36)	92 (3.62)	50 (1.97)	M16x1.5

Part Number	Capacity	Ship Weight
HJ 8-201-0.5/2t	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb
HJ 8-201-2.5/5t	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb
HJ 8-201-1/4K	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb
HJ 8-201-5/10K	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb
HJ 8-201-10t	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb
HJ8-201-15/20K	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb



Alloy steel, assembled with H8, B8D

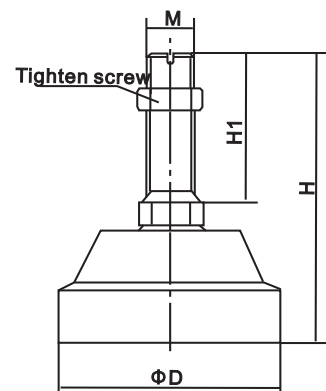

Accessories



HJ-8-203

Capacity
0.5-2t


Features:

Alloy steel with rubber inside, slightly adjustable of the slant, easy installation.
Mainly used for platform scales, packaging scales, hybrid scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
HJ 8-203-0.5/2t	H8C, HM8C, B8D, BM8D alloy steel rubber foot with hardware	2 lb



Alloy steel, assembled with H8C, B8D, HM8C, BM8D

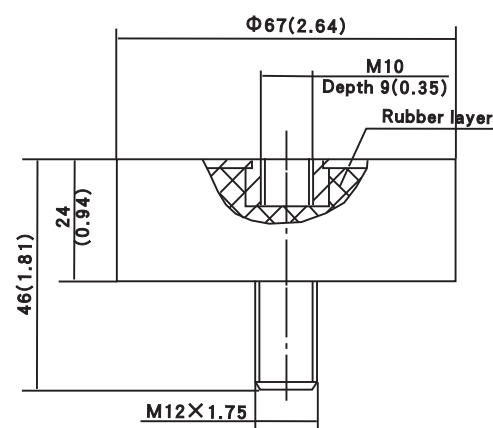

HJ-8-213

Capacity
0.5-2t


Features:

Easy installation, adjustable height, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices.

Part Number	Capacity	Ship Weight
HJ 8-213-0.5/2t	H8C, HM8C, B8D, BM8D alloy steel swivel foot with hardware	2 lb



Alloy steel, assembled with H8C, B8D, HM8C, BM8D

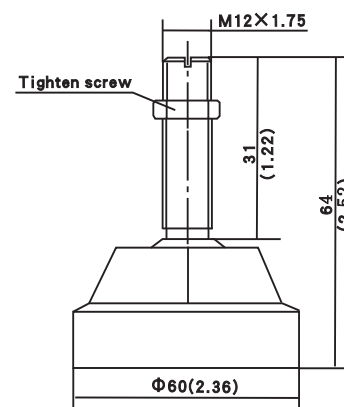

HJ-8-218

Capacity

0.15t-2t
5t
500lb-4Klb
10Klb

Features:

Easy installation, adjustable height, automatically centralized inside, good ability of anti-side loading. Mainly used for platform scales, floor scales and other electronic weighing devices.


Outline Dimension mm (inch)	
Capacity	Model
250kg-2t	M12x1.75
5t	M20x2.5
500lb-4Klb	1/2-20UNF
10Klb	3/4-UNF




Alloy steel, rubber supporting subassembly, assembled with BM8H, H8H

Part Number	Capacity	Ship Weight
H8 -218-0.25/2T	H8C, HM8C, B8D, BM8D alloy steel rubber foot with hardware	2 lb
H8 -218-5T	H8C, HM8C, B8D, BM8D alloy steel rubber foot with hardware	2 lb
HJ8-218-500/4K	H8C, HM8C, B8D, BM8D alloy steel rubber foot with hardware	2 lb
HJ8-218-10K	H8C, HM8C, B8D, BM8D alloy steel rubber foot with hardware	2 lb

0.25t-2t, 500lb-4klb

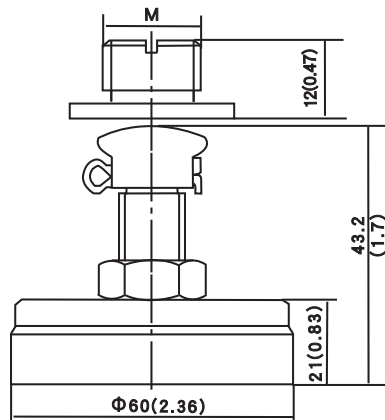

5t, 10klb

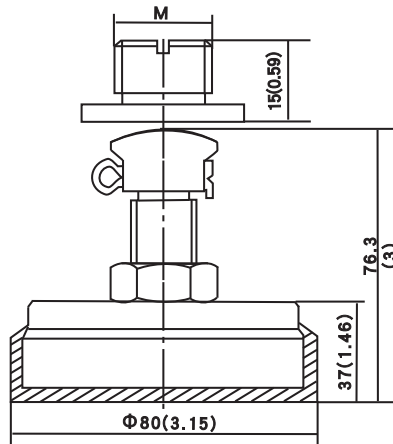



HY-8-101

Capacity

0.15t-2t

5t

10t-15t

20t-25t

Features:


Easy installation, anti-corrosion, non-downable structure, good self-aligning ability. Mainly used for truck scales, platform scales and other electronic weighing devices.

Outline Dimension mm (inch)			
Dimension	D	H	H1
Capacity			
0.5t-3t	35 (1.38)	44.9 (1.77)	24.9 (0.98)
5t	42 (1.65)	56.7 (2.23)	34.7 (1.37)
10t-15t	57 (2.24)	80.7 (3.18)	66.7 (2.63)
20t-25t	70 (2.76)	85 (3.35)	67 (2.64)

Part Number	Capacity	Ship Weight
HY-8-101-0.5/3t	H8, HM8 alloy steel load button	2 lb
HY-8-101-5t	H8, HM8 alloy steel load button	2 lb
HY-8-101-10/15t	H8, HM8 alloy steel load button	2 lb
HY-8-101-20/25t	H8, HM8 alloy steel load button	2 lb



Alloy steel, assembled with H8, HM8

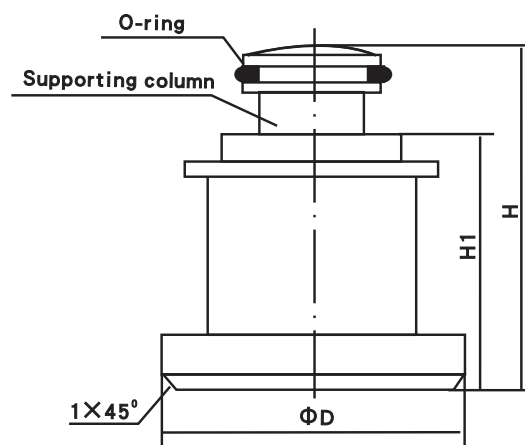

HY-8-102

Capacity

0.5-2t

2.5t-5t

Features:


Easy installation, automatically centralized with steel ball, good self-aligning ability. Mainly used for platform scales and other electronic weighing devices.

Outline Dimension mm (inch)		
Dimension	d	M
Capacity		
0.5t-2t	12 (0.47)	M12x1.75
2.5t-5t	18 (0.71)	M18x1.5

Part Number	Capacity	Ship Weight
HY-8-102-0.5/2t	H8C, B8D, HM8C, B8D, BM8D alloy ball and cup assembly	2 lb
HY-8-102-2.5/5t	H8C, B8D, HM8C, B8D, BM8D alloy ball and cup assembly	2 lb



Stainless steel, assembled with H8C, B8D, HM8C, BM8D

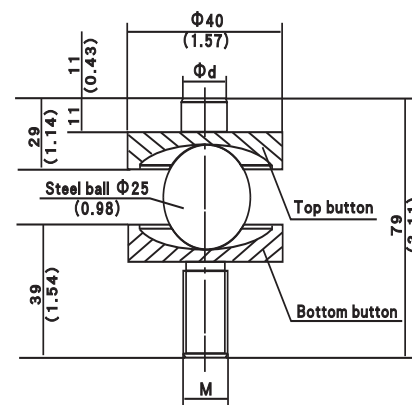

JB02

Features:

- Cast aluminum, plastic-sprayed
- Easy to assemble and calibrate, high reliability
- Fully encapsulated, water-proof and moisture proof
- Sensitivity matched adjusting methods
- Operating temperature: -40°C~+85°C


Description:

- Specially designed for scales
- This model are available to connect 2 to 4 load cells with 4-wire or 6-wire cable on different requests

Optional Table	
Part Number	Channels
B 02-2	2
B 02-3	3
B 02-4	4



Outline Dimensions mm (inch)

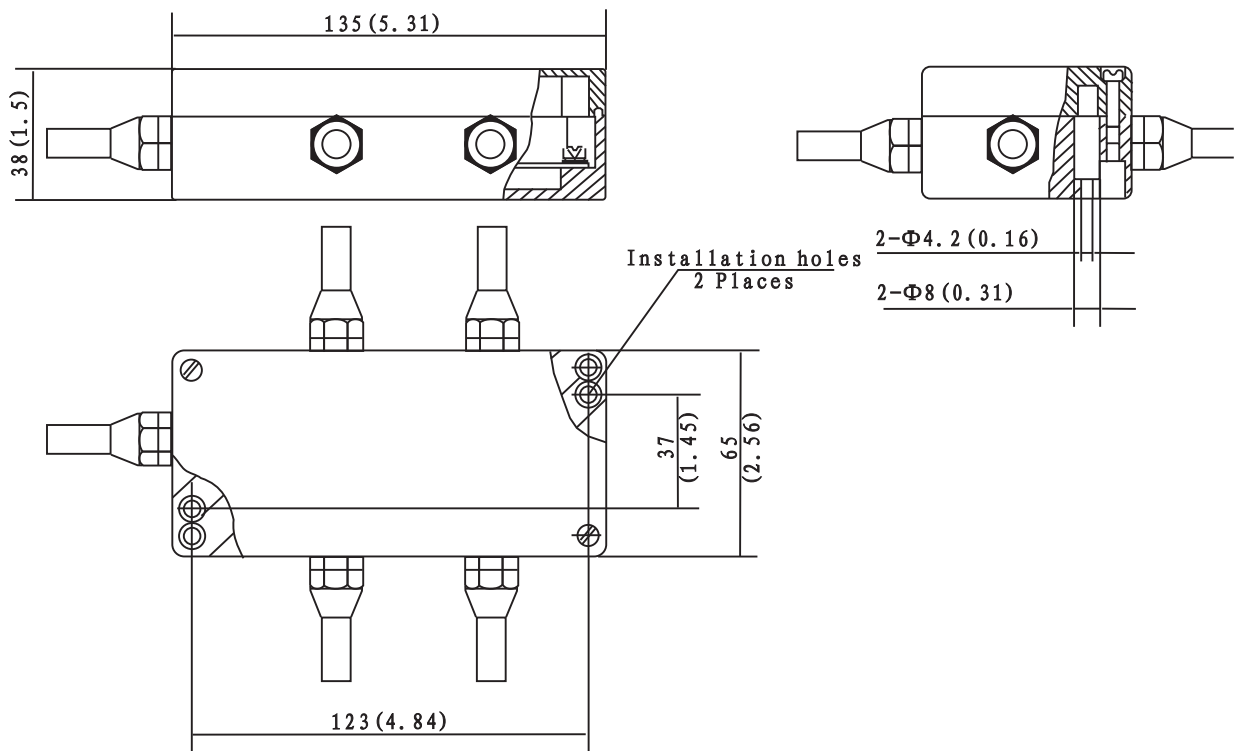

Part Number	Capacity	Ship Weight	Price
B 02-2	2 channel junction boxes aluminum	2 lb	\$150
B 02-3	3 channel junction boxes aluminum	2 lb	\$150
B 02-4	4 channel junction boxes aluminum	2 lb	\$150




JB05A

Features:

- Cast aluminum, plastic-sprayed
- Easy to assemble and calibrate, high reliability
- Fully encapsulated, water-proof and moisture proof and lightning protected.
- Sensitivity matched adjusting methods
- Surge protection
- Operating temperature: -40°C~+85°C


Description:

- Specially designed for scales
- This model are available to connect 4 to 8 load cells with 4-wire cable on different requests

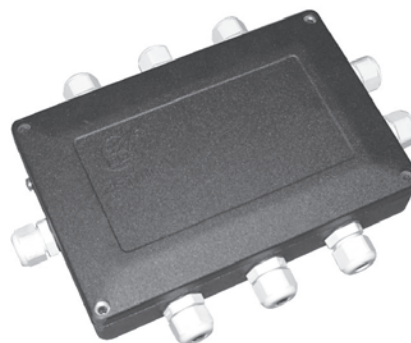

Optional Table	
Part Number	Channels
B 05A-4	4
B 05A-6	6
B 05A-8	8

Outline Dimensions mm (inch)

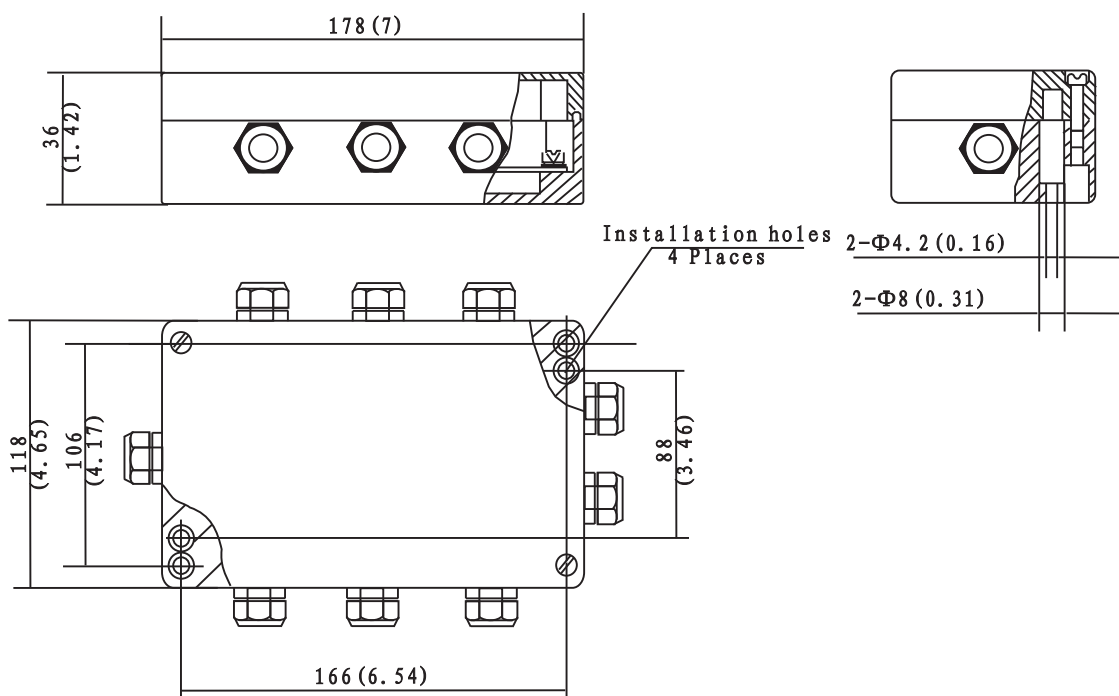

Part Number	Capacity	Ship Weight	Price
B 05A-4	2 channel junction boxes aluminum	2 lb	\$155
B 05A-6	4 channel junction boxes aluminum	2 lb	\$170



VALUE IN
WEIGHING

Wiring Guide									
Manufacturer	Models	Excitation +	Excitation -	Signal +	Signal -	Shield	Sense +	Sense -	
A&D Engineering		RED	WHITE	GREEN	BLUE	YELLOW			
Allegany Technology		GREEN	BLACK	RED	WHITE	BARE			
Advance Transducers		RED	BLACK	GREEN	WHITE	BARE			
Allegany		GREEN	BLACK	WHITE	RED	BARE			
Alphatron		RED	BLACK	GREEN	WHITE	BARE			
Anyload		RED	BLACK	GREEN	WHITE	BARE			
	108LSMT	GREEN	BLACK	RED	WHITE	BARE	BLUE	BROWN	
Artech		RED	BLACK	GREEN	WHITE	BARE			
Avery Weigh-Tronix		GREEN	BLACK	WHITE	RED	WHITE/ORANGE			
Beowulf		GREEN	BLACK	WHITE	RED	BARE			
BLH		GREEN	BLACK	WHITE	RED	YELLOW			
Cas		RED	BLACK	GREEN	WHITE	BARE	BLUE	BROWN	
Celtron		RED	BLACK	GREEN	WHITE	BARE			
Cardinal		GREEN	BLACK	WHITE	RED	BARE			
CNCell		RED	BLACK	GREEN	WHITE	BARE			
Coti		GREEN	BLACK	WHITE	RED	BARE			
Digi		RED	WHITE	GREEN	YELLOW	GRAY			
Dillon	CANISTER TENSION	RED	BLACK	GREEN	WHITE	ORANGE			
	COMPRESSION	RED	BLACK	WHITE	GREEN	ORANGE			
	Z-CELL	RED	BLACK	WHITE	GREEN	ORANGE			
Electroscale		RED	BLACK	GREEN	WHITE	BARE			
Epelsa		RED	BLACK	GREEN	WHITE	BARE	VIOLET	GRAY	
Evergreen		GREEN	BLACK	WHITE	RED	BARE			
Flintec	PC1, PC2, PC6, RC1, SB4, SB5, SB6, SB14, SLB, UB1, UB6, SB10, PCB, BK2	GREEN	BLACK	WHITE	RED	YELLOW			
Force Measurement		RED	BLACK	GREEN	WHITE	BARE			
General Sensor		RED	BLACK	GREEN	WHITE	BARE			
Genisco		RED	BLACK	GREEN	WHITE	BARE			
GSE		RED	BLACK	WHITE	GREEN	BARE			
HBM	SBF, SB3, USBU1T, Z6, H35	GREEN	BLACK	WHITE	RED	YELLOW			
	BLC, BLF, JRT, PWS, RSC	GREEN	BLACK	WHITE	RED	YELLOW			
	PLC, B35, SBE	RED	BLACK	GREEN	WHITE	YELLOW			
	BBS	GREEN	BLACK	WHITE	RED	BARE			
	SP4, SP10, PW15, PWS, PWSM	GREEN	BLACK	WHITE	RED	YELLOW	ORANGE	BLUE	
	PW12, PW16, C16, PW15AH	BLUE	BLACK	WHITE	RED	YELLOW	GREEN	GRAY	
Interface	SSM, 1200, 3200	RED	BLACK	GREEN	WHITE	BARE			
Kubota		RED	WHITE	GREEN	BLUE	YELLOW			
LeBow		RED	BLACK	GREEN	WHITE	BARE			
Mettler Toledo		WHITE	BLUE	GREEN	BLACK	ORANGE	YELLOW	RED	
National Scale		GREEN	BLACK	WHITE	RED	YELLOW			
Nikkei		RED	BLACK	GREEN	WHITE	BARE			
NCI		RED	BLACK	WHITE	GREEN	BARE	YELLOW	BLUE	
NMB		RED	WHITE	GREEN	BLUE	BARE			
Ormond		RED	BLACK	GREEN	WHITE	BARE			
Pennsylvania		ORANGE	BLUE	GREEN	WHITE	BARE			
Pesage Promotion		BLUE	WHITE	RED	BLACK	YELLOW			
Philips		RED	BLUE	GREEN	GRAY	BARE			
Revere Transducers	62HU, 63HU, 363, 953, 9523	RED	BLACK	GREEN	WHITE	BARE			
	92CC, 93CC, 24U, 43U, 263D, 462, 6762, 9102, 9103, 9123, 9363, 5102, 5103, 5123, 5223, 5723, 9363	RED	BLACK	GREEN	WHITE	ORANGE			
	392B, 642, 652, 692B2, BSP, HPS, USP1	GREEN	BLACK	WHITE	RED	BARE			
	792, 933, SHB, SSB	GREEN	BLACK	WHITE	RED	CLEAR			
	CP1, CSP1	GREEN	BLACK	WHITE	RED	ORANGE			
	RLC	PINK	GRAY	BROWN	WHITE	BARE			
Rice Lake Weighing	RL20000, RL20000SS, RL20001HE, RL30000, RL75061, RL50500, RL70000SS, RL71000HE, RL75016HE	RED	BLACK	GREEN	WHITE	BARE			
	RL35023, RL35023S, RL35082, RL35083, RL39123, RL75223, RL90000, RLETB, RLETS, RLHSS, RLMK4	RED	BLACK	GREEN	WHITE	BARE			
	RL39523, RL50210, RL56044, RL70000, RL75016, RL75016SS, RL75040A, RL75058, RL75060	RED	BLACK	GREEN	WHITE	BARE			
	RLMK1	RED	BLACK	WHITE	GREEN	ORANGE	YELLOW	BLUE	
	RLMK15, RLMK21	RED	BLACK	GREEN	WHITE	ORANGE			
	RL1521A	GREEN	BLACK	RED	WHITE	BARE			
	RL40BBS, RLBLC, RLBS2, RLBS2L, RLBS2M, RLBS250, RLSSB, RLKIS, RL90001WM, RL75114, RLSCA, RLBLP, RLBS2MLW	GREEN	BLACK	WHITE	RED	BARE			
	RL8C2P1SS, RLCSP1, RL75000SS, RL30745	GREEN	BLACK	WHITE	RED	ORANGE			
	RL1380, RL1385, RLH35, RL30745, RLPC6	GREEN	BLACK	WHITE	RED	YELLOW			
	RLPCB-60	GREEN	BLACK	WHITE	RED	YELLOW	BLUE	BROWN	
	RL1010, RL1040, RL1140, RL1250, RL1260	GREEN	BLACK	RED	WHITE	BARE	BLUE	BROWN	
	RLHBB, RLHTO	BLUE	BLACK	WHITE	RED	BARE	GREEN	GRAY	
	RL32155	WHITE	BLUE	GREEN	BLACK	ORANGE	YELLOW	RED	
Scaime		BROWN	GREEN	YELLOW	BLACK	WHITE	GRAY	PINK	
Sensortronics		RED	BLACK	GREEN	WHITE	BARE			
Sensotec		RED	BLACK	WHITE	GREEN	BARE			
Strainert		RED	BLACK	GREEN	WHITE	BARE			
T-Hydronics		RED	BLACK	GREEN	WHITE	BARE			
Tedea Huntleigh		GREEN	BLACK	RED	WHITE	BARE	BLUE	BROWN	
Thames Side		RED	BLUE	GREEN	YELLOW	BARE			
Toledo		GREEN	BLACK	WHITE	RED	YELLOW			
Totalcomp		RED	BLACK	GREEN	WHITE	BARE			
Transducers Inc.		RED	BLACK	GREEN	WHITE	ORANGE			
Transcell		RED	BLACK	GREEN	WHITE	BARE			
Vishay BLH	C2P1, C3P1, T2P1, T3P1	GREEN	BLACK	WHITE	RED	YELLOW			
Vishay Celtron	PSD, SEB, LCD, CSB, DSR, LOC, SQB, STC, STCCS, DSR, CLB, HED, DLB, SQB, HSS	RED	BLACK	GREEN	WHITE	BARE			
	LPS	RED	BLUE	GREEN	WHITE	BARE			
	HOC, MOC	GREEN	BLACK	RED	WHITE	BARE	BLUE	BROWN	
Vishay Sensortronics	60001, 60008, 60018, 60030, 60036, 60040, 60048, 60048SS, 60050, 60051, 60060, 60060-101, 60063, 65007, 65016, 65016SS	RED	BLACK	GREEN	WHITE	BARE			
	65016W, 65023, 65023S, 65023SS, 65024, 65040A, 65040S, 65058S, 65061A, 65083, 65083S, 65114	RED	BLACK	GREEN	WHITE	BARE			
	6007, 60064	GREEN	BLACK	WHITE	RED	BARE			
	65088-1000, 65088-1114	GREEN	BLACK	WHITE	RED	ORANGE			
Vishay Tedea-huntleigh	4157, 4158	RED	BLACK	GREEN	WHITE	BARE			
	3411, 3421	RED	BLACK	GREEN	WHITE	BARE	BLUE	BROWN	
	240, 1010, 1022, 1040, 1140, 1250, 1260, 1320, 9010, 605, 1030, 1240, 1241, 1030, 9010, 1030, 1320, 1510	GREEN	BLACK	RED	WHITE	BARE	BLUE	BROWN	
	355, 620, 3510	BLUE	BLACK	WHITE	RED	BARE	GREEN	GRAY	

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Brecknell USA

1000 Armstrong Drive
Fairmont, Minnesota 56031

Toll-Free: 800-637-0529
Telephone: 507-238-8702
Fax: 507-238-8271

Email: sales@brecknellscales.com
www.brecknellscales.com

Brecknell Canada

6429 Abrans Street
St Laurent, Quebec
Canada H4S 1X9

Toll-Free: 800-561-9461
Telephone: 514-695-0380
Fax: 514-695-0385

Email: sales@brecknellscales.ca
www.brecknellscales.ca



Brecknell is part of Avery Weigh-Tronix. Avery Weigh-Tronix is a trademark of the Illinois Tool Works group of companies whose ultimate parent company is Illinois Tool Works Inc ("Illinois Tool Works"). Copyright © 2022 Illinois Tool Works. All rights reserved. This publication is issued to provide outline information only and may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print, however Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.